

# Initial Environmental Examination

---

**Revised April 2016**

**IND: Bihar Urban Development Investment Program  
—Improvement of Water Supply System at Gaya  
(GWSP2)**

**Package: Construction of New Tube Well, Water storage reservoirs,  
Laying of Rising/ Transmission Mains and Construction of Operator  
office**

Prepared by Urban Development & Housing Department, Govt. of Bihar

## **DISCLAIMER**

This Environmental Impact Assessment is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

## ABBREVIATIONS

ADB	—	Asian Development Bank
BPLE	----	Bihar Public Land Encroachment Act
BSPCB	--	Bihar State Pollution Control Board,
BUIDCO	----	Bihar Urban Infrastructure Development Corporation
BUDIP	—	Bihar Urban Development Investment Program
C & P	-	Consultation and Participation
CBO	—	Community-based organization
CFE	—	Consent for Establishment
CFO	—	Consent for Operation
CGWB	—	Central Ground Water Board
CITES	---	Convention on International Trade in Endangered Species of Wild Fauna and Flora
CMS	---	Convention on Migratory Species of Wild Animals
CWR	—	Clear water reservoirs
DFO	-	Divisional Forest Officer
DSC	—	Design and Supervision Consultants
EAC	—	Expert Appraisal Committee
EARF	—	Environmental Assessment Resettlement Framework
EIA	—	Environmental Impact Assessment
EMP	—	Environmental Management Plan
EPA	—	Environmental Protection Agency
FAM	---	Facility Administration Memorandum
GLSR	-	Ground Level Storage Reservoir
GMC	-	Gaya Municipal Corporation
GRC	—	Grievance Redress Committee
GSHAP	—	Global Seismic Hazard Assessment Program
H and S	—	Health and safety
IEE	—	Initial Environmental Examination
IUCN	---	International Union for Conservation of Nature and Natural Resources
JnNURM	-	Jawaharlal Nehru National Urban Renewal Mission
MFF	—	Multi-tranche financing facility
MLD	—	Million liters per day
MOEFCC	—	Ministry of Environment, Forests and Climate Change
NAAQS	—	National Ambient Air Quality Standards
NGO	—	Nongovernmental organization
NOC	---	No Objection Certificate
NRRP	—	National Resettlement and Rehabilitation Policy
NRW	—	Non-revenue water
O and M	—	Operation and maintenance
OHSA	—	Occupational Health and Safety Administration
OHSR	—	Overhead storage reservoirs
OHT	--	Overhead Tank
OMC	—	Operations and Maintenance Contractors
PHED	—	Public Health Engineering Department
PIU	—	Project Implementation Unit
PMC	-	Program Management Consultant
PMU	—	Program Management Unit
ROW	—	Right of way
SEAC	—	State Environment Assessment Committee
SEIAA	—	State Environment Impact Assessment Authority
SPS	—	Safeguard Policy Statement
STP	—	Sewage treatment plant
TDS	—	Total dissolved solids
TOR	—	Terms of reference
UFW	---	Unaccounted for water

ULB	—	Urban local body
USEPA	—	United States Environmental Protection Agency
WHO	---	World Health Organization
WTP	—	Water treatment plant

### WEIGHTS AND MEASURES

cm	-	centimeter
crore	-	100 lac = 10,000,000
cumec	-	cubic meter per second
lac	-	100 thousand = 100,000
Kanal	-	505.39 square meter
km	-	kilometer
kph	-	kilometer per hour
lpd	-	liters per day
m	-	meter
m <sup>2</sup>	-	square meter
mg/l	-	milligrams per liter
mm	-	millimeter
MLD		million liters per day
MSL	-	mean sea level
μ	-	micro = 10 <sup>-6</sup>
μg/m <sup>3</sup>	-	micrograms per cubic meter

### NOTE{S}

In this report, "\$" refers to US dollars.  
 "INR" and "₹" refer to Indian rupees



## TABLE OF CONTENTS

<b>EXECUTIVE SUMMARY</b>	<b>5</b>
<b>I. INTRODUCTION</b>	<b>7</b>
A. Purpose of the Report	7
B. Extent of the IEE Study	8
C. Environmental Regulatory Compliance	9
D. Report Structure	17
<b>II. DESCRIPTION OF PROJECT</b>	<b>18</b>
A. Existing Condition	18
B. Justification of the proposed water Augmentation Project	22
C. Water Sustainability	23
D. Proposed Subproject Gaya Water Supply Package 1 (GWSP1)	24
E. Proposed Subproject and Components – Gaya Water Supply Package	30
F. Implementation Schedule	37
<b>III. DESCRIPTION OF THE ENVIRONMENT</b>	<b>38</b>
A. Physical Resources	38
B. Ecological Resources	54
C. Economic Development	55
D. Social and Cultural Resources	59
<b>IV. ANTICIPATED IMPACTS AND MITIGATION MEASURES</b>	<b>62</b>
A. Planning and Design Phase	63
B. Construction Phase	66
C. Operation and Maintenance Phase	78
D. Cumulative Environmental Impacts	81
E. Assessment of No-Go (No Build) Option	82
<b>V. INFORMATION DISCLOSURE, CONSULTATION AND PARTICIPATION</b>	<b>83</b>
A. Project Stakeholders	83
B. Public participation during the preparation of the IEE	83
C. Future Consultation and Disclosure	86
<b>VI. GRIEVANCE REDRESSAL MECHANISM</b>	<b>88</b>
<b>VII. ENVIRONMENTAL MANAGEMENT PLAN</b>	<b>92</b>
A. Institutional Arrangement	92
B. Capacity Building	96
C. Environmental Monitoring Programme	122
D. Environmental Management and Monitoring Cost	127
E. Monitoring and Reporting	129
<b>VIII. RECOMMENDATIONS AND CONCLUSIONS</b>	<b>130</b>

## APPENDICES

1.	Rapid Environmental Assessment (REA) Checklist	132
2	Geohydrological Study	138
3.	Photo illustration and Google Map – Project Locations	144
4	Layout and Site Management Plan drawing	151
5	Minutes of a Meeting with CGWB	154
6	Hydro-geological Study- Water quality	156
7	Note : Gaya Water Supply Phase 2 – Water Source - Environment Implication related to waste water discharge impact on ground water resources at Gaya – Water Quality Analysis	159
8	Technical Note: Gaya Water Supply Phase 2 – Water Source - Potential Impact from Effluent Disposal on the Water Source	167
9	Environment Impact of Transmission Mains under GWSP-II	180
10	Sample Outline of Spoil Management Plan (SMP)	182
11	Traffic Management Plan (TMP) Template	184
12	Format Confirmation from Operator of Commercial establishment/ shop for provision of temporary Access by Contactor	188
13	Indian Standard for Drinking Water. Specification (BIS:10500:2012)	189
14.	Summary of local level consultations at Gaya	190
15.	Sample Grievance Registration Form	200
16	Semi-Annual Environmental Reporting Format	202

## EXECUTIVE SUMMARY

1. Urban Development & Housing Department (UDHD), Government of Bihar (GoB) has undertaken “The Bihar Urban Development Investment Program (BUDIP)”, financed by the ADB through Multi- Tranche Financing Facility (MFF). The total estimated cost of the program is about US \$286 million, out of which maximum \$200 million will be financed by ADB.
2. The Bihar Urban Development Investment Program (BUDIP) is expected to improve the urban environment and living conditions in targeted urban areas. It will: (i) improve and expand urban infrastructure and services in urban areas; and (ii) strengthen urban institutional, management, and the financing capacity of the institutions, including the urban local bodies (ULBs). Initially it was decided that the project will be implemented in four urban areas: Bhagalpur, Darbhanga, Gaya, and Muzaffarpur in the state of Bihar. Later it was decided by Govt. of Bihar to implement the project only at Bhagalpur and Gaya. The improvement in urban infrastructure will include rehabilitation, improvement, and expansion of: (i) water supplies; and (ii) sewerage and sanitation. Due to requirement of huge investment, the Govt. of Bihar have availed external funding assistance in order to address the situation and improve the basic service levels. ADB agreed to co-finance implementation of certain components of the road map in Bihar’s largest towns (other than the state capital Patna), i.e. in Bhagalpur and Gaya.
3. The program is to be implemented in 2 to 3 tranches over a period of 9 years. Each tranche constitutes a separate loan. Tranche 1 of BUDIP (Loan 2861-IND) of amounting US \$58 million under implementation. **This proposed subproject of Improvement of Water Supply System of Gaya city is being prepared for Tranche – 2 (Project-2) financing.** Loan agreement will be signed at later stage. The sub project is item rate contract. There are 2 phases of GWSP2, 1 phase is construction phase of 18 months and other phase of 36 months which cover operation service.
4. The objective of the implementation of subproject is to supply additional source water to the water supply system of Gaya city in order to meet mid-term water demands. The subproject therewith complements the first package of the Gaya Water Supply Project that aims at renovating and expanding the water distribution system.
5. The proposed subproject is expected to have benefit through, increased availability of water by augmenting existing ground water sources.
6. The legal framework and principles adopted for addressing environmental issues in the proposed subproject have been guided by the existing legislation and policies of the Government of India, Government of Bihar, Asian Development Bank and the Environmental Assessment and Review Framework (EARF) adopted for the Tranche 2 of BUDIP.
7. Indian laws and the ADB Safeguard Policy Statement (SPS 2009) require that environmental impacts of development projects are identified and assessed as part of the planning and design process, and that action is taken to reduce those impacts to acceptable levels.
8. The subproject comprises of (i) Construction of new tube wells, (ii) Construction of water storage reservoirs, (iii) Laying of rising/ transmission mains and (iv) Construction of operator office
9. Acquisition of forest land will be required for construction of new water storage reservoir at Singrasthan. In case of felling of trees permission will be required from line agency/ Urban Local Body and State Forest Department. There is no requirement for NOC from ASI, Govt. of India or Govt. of Bihar for any land located within archeological protected area. But in case of

chance finds, the protocol should be followed as per mitigation measures addressed in Environmental Management Plan.

10. The design of proposed subproject has taken into consideration the establishment of an efficient water supply system by providing adequate supply of potable water for Gaya. Planning principles and design considerations have been reviewed and incorporated into the site planning process whenever possible. Also, the temporary (access disruptions during laying of pipeline) social impacts as per scope of works and due to construction activities are not avoidable. A Resettlement Plan has been developed in accordance with ADB SPS 2009 and Indian laws and regulations.

11. Anticipated impacts during planning stage include impact on sensitive receptors including common property resources due to planning of tube wells, transmission and rising mains. Mitigation has yet to be considered after review of design and modification.

12. Anticipated impacts during the construction period include temporary disruption of services during augmentation work; temporary access control of roads for laying of pipelines; interference with accesses to properties and businesses due to construction works; risk of accidents associated with vehicular traffic and transport of materials; increased volume of construction vehicles on the roads may lead to increased wear and tear of roads in the vicinity of the subproject sites; and exposure to increased noise, dust, vibrations; hazardous chemicals (oils and lubricants) and waste materials. An Environmental Management Plan (EMP) has been developed to provide specific actions deemed necessary to assist in mitigating the environmental impacts, guide the environmentally-sound execution of the proposed subproject, and ensure efficient lines of communication between the implementing agency, project management unit, and contractors. The EMP also provides a pro-active feasible and practical working tool to enable the measurement and monitoring performance on site.

13. Anticipated positive impacts during operation and maintenance include improvement in water supply system and healthy environment; significant enhancement in quantity of supplied water to water deficient areas. Anticipated negative impact during operation is impact on source sustainability on adjacent aquifer. The improvement of water supply system is expected to give a boost to the overall development of presently water scarce areas and reduced demand gap. In general, improvement of the water supply system shall provide broader impetus for the redevelopment of the surrounding areas and the Gaya City as a whole.

14. The public participation process included identifying interested and affected parties (stakeholders); informing and providing the stakeholders with sufficient background and technical information regarding the proposed development; creating opportunities and mechanisms whereby they can participate and raise their viewpoints (issues, comments and concerns) with regard to the proposed development; giving the stakeholders feedback on process findings and recommendations; and ensuring compliance to process requirements with regards to the environmental and related legislation. The IEE includes the activities undertaken during project design to engage the stakeholders; and planned information disclosure measures and process for carrying out consultation with affected people and facilitating their participation during project implementation.

15. The subproject's Grievance Redressal Mechanism provides the citizens with a platform for redressal of their grievances and describes the informal and formal channels, time frame and mechanisms for resolving complaints about environmental performance.

16. Therefore, as per ADB SPS, the subproject is classified as environmental Category B and does not require further Environmental Impact Assessment. As per Indian laws, the proposed subproject does not require an Environmental Clearance.

## I. INTRODUCTION

### A. Purpose of the Report

1. The Bihar Urban Development Investment Program (BUDIP) is expected to improve the urban environment and living conditions in targeted urban areas. It will: (i) improve and expand urban infrastructure and services in urban areas; and (ii) strengthen urban institutional, management, and the financing capacity of the institutions, including the urban local bodies (ULBs). The project will be implemented in 2 urban areas: Bhagalpur and Gaya in the state of Bihar.

2. BUDIP is funded by a Multitranche Financing Facility (MFF) loan from the Asian Development Bank (ADB). The Executing Agency (EA) is the Urban Development & Housing Department (UDHD) of the Government of Bihar (GoB); and the Implementing Agency is the Bihar Urban Infrastructure Development Corporation (BUIDCo) which is the Project Management Unit (PMU) for BUDIP.

3. This Initial Environmental Examination (IEE) has been prepared for the Gaya Water Supply Subproject. The present subproject for Gaya, GWSP2, comprise for creation of new water source (from tube wells), transmission of water through laying of pipe, storage of water in water storage reservoirs, introduction of tools for monitoring the production of water, and operation of the new facilities by the contractor for a period of 3 years.

4. Gaya Water Supply Project – Package 2 (GWSP2) is complementary of Gaya Water Supply Project – Package 1 (GWSP1). GWSP1 comprises the rehabilitation of existing tube wells, the rehabilitation of existing and construction of new storage reservoirs, and the replacement and expansion of the water distribution network to cover the entire city. GWSP1 also includes a multi-year operation contract in which the contractor is responsible for operation & maintenance of the entire water supply system, for the development and introduction of operation and management tools and for training of staff of the Gaya water supply section.

5. The present subproject GWSP2 proposes to abstract groundwater from the bed of the Phalgu River. It is a 900 m wide, non-perennial river flowing through the city and is underlain by a substantial, 25 m thick aquifer. Exploitation of this aquifer avoids having to transport the water over a distance of 100 km from the Ganges River, the nearest permanent source of surface water. Extensive hydrological and hydro-geological investigations have been carried out by the project to confirm the feasibility of the proposal, further elaborated by an assessment of possible environmental impacts. This IEE reports of the findings of these investigations and assessments.

6. The proposed subproject is expected to have the following benefits:

- Increase availability of water by creation of new source, augmenting existing water sources; improve operation and maintenance quality of pumping system.

7. The legal framework and principles adopted for addressing environmental issues in the proposed subproject have been guided by the existing legislation and policies of the Government of India, Government of Bihar, Asian Development Bank and the Environmental Assessment Review Framework (EARF) adopted for Tranche 2 of BUDIP. ADB requires the

consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009. According to the SPS, environmental assessment is required for all subprojects under a MFF modality.

8. An environmental assessment using ADB's Rapid Environmental Assessment (REA) through checklist for Water Supply under GWSP2 (**Appendix 1**) was conducted for the Augmentation of Water Supply for Gaya under the Tranche 2.

9. Results of the assessment show that the proposed development should not cause significant adverse impacts, provided that the location of several of the proposed tube wells is adjusted. Thus this Initial Environmental Examination (IEE) report has been prepared in accordance to ADB SPS's requirements for environment **Category B projects**.

#### **B. Extent of the IEE Study**

10. This IEE report was prepared on the basis of detailed screening and analysis of all environmental parameters, field investigations, desk studies and stakeholder consultations to meet the requirements for environmental assessment process and documentation as per ADB's Safeguard Policy Statement (SPS, 2009) and Government of India Environmental Impact Assessment (EIA) Notification of 2006.

11. Based on the findings of the IEE, an Environmental management plan (EMP) has been prepared, outlining the specific environmental measures to be adhered during implementation of the sub project. This EMP forms part of the contract document, and shall enable integration of environmental provisions / management measures in the Contract Document.

12. The IEE has been prepared to meet the following objectives:

- (i) to provide critical facts, significant findings, and recommended actions;
- (ii) to present the national and local legal and institutional framework within which the environmental assessment has been carried out;
- (iii) to provide information on the existing geographic, ecological, social and temporal context including associated facilities within the subproject's area of influence;
- (iv) to assess the subproject's likely positive and negative direct and indirect impacts to physical, biological, socio-economic and physical cultural resources in the subproject's area of influence;
- (v) to identify mitigation measures and any residual negative impacts that cannot be mitigated;
- (vi) to describe the process undertaken during project design to engage stakeholders and the planned information disclosure measures and the process for carrying out consultation with affected people and facilitating their participation during project implementation;
- (vii) to describe the subproject's grievance redressal mechanism for resolving complaints about environmental performance;

- (viii) to present the set of mitigation measures to be undertaken to avoid, reduce, mitigate or compensate for adverse environmental impacts;
- (ix) to describe the monitoring measures and reporting procedures to ensure early detection of conditions that necessitate particular mitigation measures; and
- (x) to identify who is responsible for carrying out the mitigation and monitoring measures.

### **C. Environmental Regulatory Compliance**

#### ***ADB Policy***

13. ADB requires the consideration of environmental issues in all aspects of ADB's operations, and the requirements for environmental assessment are described in ADB's SPS, 2009. This states that ADB requires environmental assessment of all project loans, program loans, sector loans, sector development program loans and loans involving financial intermediaries and private sector loans.

14. **Screening and Categorization.** The nature of the environmental assessment required for a project depends on the significance of its environmental impacts, which are related to the type and location of the project, the sensitivity, scale, nature and magnitude of its potential impacts and the availability of cost-effective mitigation measures. Projects are screened for their expected environmental impacts and are assigned to one of the following four categories:

- (i) **Category A.** Projects could have significant adverse environmental impacts. An EIA is required to address significant impacts.
- (ii) **Category B.** Projects could have some adverse environmental impacts, but of lesser degree or significance than those in category A. An IEE is required to determine whether significant environmental impacts warranting an EIA are likely. If an EIA is not needed, the IEE is regarded as the final environmental assessment report.
- (iii) **Category C.** Projects are unlikely to have adverse environmental impacts. No EIA or IEE is required, although environmental implications are reviewed.
- (iv) **Category FI.** Projects involve a credit line through a financial intermediary or an equity investment in a financial intermediary. The financial intermediary must apply an environmental management system, unless all Projects will result in insignificant impacts.

15. **Environmental Management Plan.** An EMP which addresses the potential impacts and risks identified by the environmental assessment shall be prepared. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the Project's impact and risks.

16. **Public Disclosure.** ADB will post the following safeguard documents on its website so affected people, other stakeholders and the general public can provide meaningful inputs into the project design and implementation:

- (i) For environmental category A projects, draft EIA report at least 120 days before Board consideration;
- (ii) Final or updated EIA and/or IEE upon receipt; and
- (iii) Environmental Monitoring Reports submitted by PMU during project implementation upon receipt.

17. The above is to meet the requirements of ADB's Public Communication Policy 2011.

### ***National and State Laws***

18. The implementation of the subprojects will be governed by Government of India (GoI) and State of Bihar environmental acts, rules, regulations, and standards. These regulations impose restrictions on the activities to minimize/mitigate likely impacts on the environment. It is the responsibility of the project executing and implementing agencies to ensure subprojects are consistent with the legal framework, whether national, state or municipal/local. Compliance is required in all stages of the subproject including design, construction, and operation and maintenance.

19. **EIA Notification.** The GoI EIA Notification of 2006, as amended (replacing the EIA Notification of 1994), sets out the requirement for environmental assessment in India. This states that Environmental Clearance (EC) is required for specified activities/projects, and this must be obtained before any construction work or land preparation (except land acquisition) may commence. Projects are categorized as A or B depending on the scale of the project and the nature of its impacts. Category A projects requires Environmental Clearance from the National Ministry of Environment, Forests and Climate Change (MoEFCC). Category B projects require environmental clearance from the State Environment Impact Assessment Authority (SEIAA).

20. The proposed subproject package GWSP2 is not listed in the EIA Notification of 2006 "Schedule of Projects Requiring Prior Environmental Clearance" thus EC is not required.

21. **Water (Prevention and Control of Pollution) Act of 1974, Rules of 1975, and amendments.** Control of water pollution is achieved through administering conditions imposed in consent issued under provision of the Water (Prevention and Control of Pollution) Act, 1974. These conditions regulate the quality and quantity of effluent, the location of discharge and the frequency of monitoring of effluents. Any component of the Project having potential to generate sewage or trade effluent will come under the purview of this Act, its rules and amendments. Such projects have to obtain Consent to Establish (CTE) under Section 25/26 of the Act from State Pollution Control Board (SPCB) before starting implementation and Consent to Operate (CTO) before commissioning. The Water Act also requires the occupier of such subprojects to take measures for abating the possible pollution of receiving water bodies.

22. The proposed subproject package related to water source construction is not included in the lists of activities requiring CTE and CTO under the Water Act.

23. **The Air (Prevention and Control of Pollution) Act 1981, amended 1987 and The Air (Prevention and Control of Pollution) Rules, 1982.** The subprojects having potential to emit air pollutants into the atmosphere have to obtain CTE under Section 21 of the Air (Prevention



and Control of Pollution) Act of 1981 from SPCB before starting implementation and CTO before commissioning the project. The occupier of the project/facility has the responsibility to adopt necessary air pollution control measures for abating air pollution. The following require CTE and CTO from Bihar Pollution Control Board: (i) diesel generators; and (ii) hot mix plants, wet mix plants, stone crushers etc, if installed for construction. Emissions and discharges shall comply with standards notified by the Central Pollution Control Board.

24. **The Noise Pollution (regulation and control) rules, 2000, as amended.** Since the subproject corridor/ area is located within the city, the construction activity and use of heavy machinery and vehicles may increase the ambient noise levels during the construction phase. It is considered necessary to regulate and control noise producing and generating sources with the objective of maintaining the ambient air quality standards in respect of noise. The occupier of subprojects have to take measures for abatement of noise pollution ensuring that the existing noise levels do not exceed the standards specified under the Noise Pollution (regulation and control) rules, 2000, as amended.

25. **Bihar Ground Water (regulation and control of Development and Management)Act, 2006.** Any user of groundwater as defined under section 2(1) desiring to sink a well in the notified area for any purpose either on personal or community basis, shall apply to the Authority for grant of a permit for this purpose, and shall not proceed with any activity connected with such sinking unless a permit has been granted by the Authority. There is no as such notified area in Bihar.

26. **Bihar Municipal Bill, 2007.** Prohibition regarding sinking of tube-wells or digging of wells etc.- (1) No person shall, except with the prior permission, in writing, of the Chief Municipal Officer, sink any tube-well or dig or construct any new well, tank, pond, cistern or fountain in any municipal area

27. **The Indian Forest Act, 1927; Forest (Conservation) Act, 1980, amended 1988; Forest (Conservation) Rules, 1981 amended 1992 and 2003; and Guidelines for Diversion of Forest Lands for Non-Forest Purpose under the Forest (Conservation) Act, 1980**

28. The Forest (Conservation) Act, 1980 applies to diversion of forest areas and felling of roadside plantations. Depending on the size of the tract to be cleared, clearances are applied for at the following levels of Government:

- Forest land involving up to 5 hectares (ha) will be cleared by the Regional Office of MoEFCC.
- Forest land involving more than 5 ha and up to 20 ha will be cleared by the Regional Office after referring the case to MoEFCC.
- Conversion of forest land (i) having density above 0.4 irrespective of the area involved, and, (ii) of more than 20 ha in the plains and 10 ha in the hilly region, irrespective of density, will be cleared by MoEFCC.

29. The Act requires:

- Compensatory afforestation is compulsory for conversion.
- Afforestation will be done over an equivalent area of non-forest land.

- As far as possible, the non-forest land for compensatory afforestation should be identified contiguous to or in the proximity of Reserved Forest or Protected Forest. If non-forest lands are not available in the same district other non-forest land may be identified elsewhere in the State.
- Where non-forest lands are not available, compensatory afforestation may be carried out over degraded forest twice in extent to the area being diverted.

30. The forest land conversion will follow the “Guidelines for Diversion of Forest Lands for Non-Forest Purpose” under the Act. Restrictions and clearance procedure proposed in the Act applies wholly to the natural forest areas, even in case the protected/ designated forest area does not have any vegetation cover.

31. At one location (Singraathan) for construction of water storage reservoir forest land of 0.2925 ha needs to be acquired and accordingly clearance from forest dept. is also required.

32. **The Bihar Forest (Amended) Act, 1990 and Bihar Public Land Encroachment Act, 1956 (BPLE).** It provides that encroachment of forest land is a cognizable and non-bailable offence. If any Forest Officer, not below the rank of the Divisional Forest Officer (DFO), has reasons to believe that forest land has been encroached, the Officer can evict the encroachers and can use all power conferred on a Magistrate under the Bihar Public Land Encroachment Act, 1956. The Indian Forest Act, 1927 provides realization of royalty and compensation for damages of forest produce and forest land from the encroachers.

33. **Bihar Minor Mineral Concession (amendment) Rule, 2014.** Maximum permissible depth for sand quarrying- The maximum depth of sand quarrying in the river bed shall not exceed three meters measured from the un-mined bed level at any point of time or the water table whichever is less.

34. **Ancient Monuments and Archaeological Sites and Remains Rules, 1959. Bihar Ancient Monuments and Archaeological Sites, remains And Art Treasures Act, 1976.**

35. The Rules designate areas within a radius of 100m and 300m from the “protected property” as “protected area” and “controlled area” respectively. No development activity (including mining operations and construction) is permitted in the “protected area” and all development activities likely to damage the protected property are not permitted in the “controlled area” without prior permission of the Archaeological Survey of India (ASI). Protected property includes the site, remains, and monuments protected by ASI or the State Department of Archaeology.

36. As per state Rules No person, including the owner or occupier of a protected area, shall construct any building within protected area or carry on any mining, quarrying excavating, blasting or any operation of a like nature in such area, or utilize such area or any part thereof in any other manner without the permission of the State Government:

37. Subproject activities within Archaeologically Protected Areas will be avoided. If activities are to be done in the controlled area of protected properties, then the executing and implementing agencies and the line department will have to take the necessary NOC from ASI.

38. Within the Gaya city there is state archeological protected area like Vishnupad Temple, Ramshilla hills, Brahmayoni hill. But as per proposed project location no clearance is required from state archeological dept.

### ***International Environmental Agreements***

39. In addition to national and state rules and regulations, international conventions such as the International Union for Conservation of Nature and Natural Resources (IUCN), Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES), Convention on Migratory Species of Wild Animals (CMS), Ramsar Convention on Wetlands of International Importance and Millennium Development Goals are applicable for selection and screening of subprojects under restricted/sensitive areas. India is a party to these conventions.

- **International Union for Conservation of Nature and Natural Resources (IUCN)**

40. The IUCN Red List of Threatened Species (also known as the IUCN Red List or Red Data List), founded in 1963, is a comprehensive inventory of the global conservation status of plant and animal species. The IUCN is an authority on the conservation status of species. A series of Regional Red Lists are produced by countries or organizations, which assess the risk of extinction to species within a political management unit. The IUCN Red List is set upon precise criteria to evaluate the extinction risk of thousands of species and subspecies. These criteria are relevant to all species and all regions of the world. The aim is to convey the urgency of conservation issues to the public and policy makers, as well as help the international community to try to reduce species extinction.

41. Present Gaya Water supply package (GWSP2) is not linked with IUCN conservation issue.

- **Convention on Migratory Species of Wild Animals (CMS)**

42. CMS was adopted in 1979 and entered into force on 1 November 1983. CMS, also known as the Bonn Convention, recognizes that states must be the protectors of migratory species that live within or pass through their national jurisdictions, and aims to conserve terrestrial, marine and avian migratory species throughout their ranges. Migratory species threatened with extinction. CMS Parties strive towards strictly protecting these species, conserving or restoring the places where they live, mitigating obstacles to migration and controlling other factors that might endanger them. Migratory species that need or would significantly benefit from international cooperation and CMS encourages the Range States to conclude global or regional agreements.

43. Present project is not linked with CMS.

- **Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES)**

44. CITES is an international agreement between governments. Its aim is to ensure that international trade in specimens of wild animals and plants does not threaten their survival. CITES were first formed, in the 1960s. Annually, international wildlife trade is estimated to be worth billions of dollars and to include hundreds of millions of plant and animal specimens. The trade is diverse, ranging from live animals and plants to a vast array of wildlife products derived

from them, including food products, exotic leather goods, wooden musical instruments, timber, tourist curios and medicines. Levels of exploitation of some animal and plant species are high and the trade in them, together with other factors, such as habitat loss, is capable of heavily depleting their populations and even bringing some species close to extinction. Many wildlife species in trade are not endangered, but the existence of an agreement to ensure the sustainability of the trade is important in order to safeguard these resources for the future. Because the trade in wild animals and plants crosses borders between countries, the effort to regulate it requires international cooperation to safeguard certain species from over-exploitation.

45. CITES is not applicable for Gaya water supply project, GWSP2.

- **Ramsar Convention on Wetlands of International Importance 1971**

46. The Convention on Wetlands of International Importance, called the Ramsar Convention, is an intergovernmental treaty that provides the framework for national action and international cooperation for the conservation and wise use of wetlands and their resources. The Ramsar Convention is an international treaty for the conservation and sustainable utilization of wetlands. The Ramsar Convention is the only global environmental treaty that deals with a particular ecosystem.

47. The said Gaya water supply project is not located within Ramsar site.

- **Millennium Development Goals**

48. The Millennium Development Goals (MDGs) were adopted in the General Assembly of the United Nations in the year 2000 by all the countries of the world and the world's leading development institutions. The target date for achieving the MGDs by all the countries has been fixed as 2015. The MGDs are as follows:

- Eradicate extreme hunger and poverty
- Achieve universal primary education
- Promote gender equality and empower women
- Reduce child mortality
- Improve maternal health
- Combat HIV / AIDS malaria and other diseases
- Ensure environmental sustainability
- Develop a global partnership for development

49. Though the MGDs do not directly apply to the project, the mitigation measures while preparing the Environmental Management Plan and will make the project sustainable and can help achieve some of the goals in the regional context.

50. **World bank Environmental, Health, and Safety (EHS) Guidelines -General EHS Guidelines: Occupational, Health and safety** ([www.ifc.org/ifcext/enviro.nsf/Content/Environmental\\_guidelines](http://www.ifc.org/ifcext/enviro.nsf/Content/Environmental_guidelines)) and EHS Guidelines for water & sanitation will be

followed(<http://www.ifc.org/wps/wcm/connect/e22c050048855ae0875cd76a6515bb18/Final%2B-%2BWater%2Band%2BSanitation.pdf?MOD=AJPERE>)

51. Employers and supervisors are obliged to implement all reasonable precautions to protect the health and safety of workers. Preventive and protective measures should be introduced according to the following order of priority:

- Eliminating the hazard by removing the activity from the work process. Examples include substitution with less hazardous chemicals, using different manufacturing processes, etc;
- Controlling the hazard at its source through use of engineering controls. Examples include local exhaust ventilation, isolation rooms, machine guarding, acoustic insulating, etc;
- Minimizing the hazard through design of safe work systems and administrative or institutional control measures. Examples include job rotation, training safe work procedures, lock-out and tag-out, workplace monitoring, limiting exposure or work duration, etc.
- Providing appropriate personal protective equipment (PPE) in conjunction with training, use, and maintenance of the PPE

52. There is no requirement for NOC from archeological Survey of India (ASI), Govt. of India. But in case of chance finds, the protocol should be followed as per mitigation measures addressed in Environmental Management Plan.

53. The summary of environmental regulations and mandatory requirements for the proposed subproject, GWSP2 is shown in **Table 1**.

54. Permission will be required from railways for crossing of pipeline near Cotton mill, Naryan nagar Kharkhura.

**Table 1: Applicable Environmental Regulations and Status**

Applicability of Acts/Guidelines	Compliance Criteria
The EIA notification, 2006 (and its subsequent amendments in 2009) provides for categorization of projects into category A and B, based on extent of impact	The sub project is not covered in the ambit of the EIA notification as this is not covered either under Category A or Category B of the notification. As a result, the categorization, and the subsequent environmental assessment and clearance requirements, either from the state or the central Government is not triggered.  Environmental Clearance is not required for the proposed sub project package at Gaya
Wild Life (Protection) Act 1972, Amendment Act, 1993 and 2002 and Wildlife (Protection) Rules, 1995	Clearance from state and national wildlife boards, Central Empowered Committee of Hon'ble Supreme Court of India and the State Wildlife Department, as applicable.  The wildlife protection act is not applicable for the proposed subproject.

Applicability of Acts/Guidelines	Compliance Criteria
The Indian Forest Act, 1927; Forest (Conservation) Act, 1980, amended 1988; Forest (Conservation) Rules, 1981 amended 1992 and 2003	Forest land of 0.2925 ha needs to be acquired for construction of reservoir at Singrasthan. Application yet to be send. <b><i>It will take about 6 months to get NOC from State Forest Department</i></b>  Clearance from Forest department for cutting of trees, if any. – At ITI Polytechnic water reservoir site one tree will remove and permission will be taken from DFO Gaya. <b><i>It will take three month to get NOC</i></b>
Ancient Monuments and Archaeological Sites and Remains Rules, 1959. Bihar Ancient Monuments and Archaeological Sites, remains And Art Treasures Act, 1976 provide guidance for carrying out activities, including conservation, construction and reuse in and around the protected monuments.	There is no requirement of clearance from ASI, Govt. of India and state archeological dept.
Water (Prevention and control of pollution) Act, 1974, as amended Air (prevention and control of pollution) Act, 1981, as amended and Noise Pollution (Regulation and Control) Rules, 2000, as amended.	Consent to Establish (CTE) and Consent to Operate (CTO) from the Bihar Pollution Control Board is not required

55. To improve environmental quality more stringent international standard will be followed.

**Table 2 and 3** shows World Health Organization standard for air quality and noise levels.

**Table 2: WHO Ambient Air Quality Guidelines**

	Averaging Period	Guideline value in $\mu\text{g}/\text{m}^3$
Sulfur dioxide (SO <sub>2</sub> )	24-hour	125 (Interim target-1) 50 (Interim target-2) 20 (guideline) 500 (guideline)
	10 minute	
Nitrogen dioxide (NO <sub>2</sub> )	1-year	40 (guideline)
	1-hour	200 (guideline)
Particulate Matter PM <sub>10</sub>	1-year	70 (Interim target-1) 50 (Interim target-2) 30 (Interim target-3) 20 (guideline)
	24-hour	150 (Interim target-1) 100 (Interim target-2) 75 (Interim target-3) 50 (guideline)
Particulate Matter PM <sub>2.5</sub>	1-year	35 (Interim target-1) 25 (Interim target-2) 15 (Interim target-3) 10 (guideline)
	24-hour	75 (Interim target-1) 50 (Interim target-2) 37.5 (Interim target-3) 25 (guideline)
Ozone	8-hour daily maximum	160 (Interim target-1) 100 (guideline)

**Table 3: World Bank Group's EHS Noise Level Guidelines**

Receptor	One Hour $L_{Aeq}$ (dBA)	
	Daytime 07:00 - 22:00	Nighttime 22:00 - 07:00
Residential; institutional; educational <sup>55</sup>	55	45
Industrial; commercial	70	70

**D. Report Structure**

56. This Report contains eight (8) sections including this introductory section: (i) Introduction; (ii) Description of the Project; (iii) Description of the Environment; (iv) Anticipated Impacts and Mitigation Measures; (v) Information Disclosure, Consultation and Participation; (vi) Grievance Redressal Mechanism; (vii) Environmental Management Plan; and (viii) Recommendations and Conclusions.

## II. DESCRIPTION OF THE PROJECT

### A. Existing Condition

#### *Water Source*

57. Gaya is the district headquarter city in Gaya District located in the southern part of Bihar State. The city is situated at both banks of River Phalgu. The city is located at an altitude of about 110 meters above the MSL.

58. The existing water sources of Gaya consist of underground water extracted by tube wells locate on both sides of the River Phalgu, in Manpur and in Gaya main town. There are 39 tube wells in the city at present of which 2 are in standby. 3 wells are not commissioned and 2 are not working. The tube wells are in 4 segments, i.e. on the Manpur side, at Dandibagh, at Panchayati Akhara and wells scattered within the main city area. The tube wells in Manpur, Dandibagh and Panchayati Akhara area are bored in the bed/bank of river Phalgu and the other tube wells are bored at various locations in the city away from the river bank. The tube wells constructed in Manpur side are pumping directly to distribution system in Manpur area. The tube wells installed in Dandibagh side are used to pump water to the reservoirs located on Brahmayoni hills. Tube wells installed in Panchayati Akhara were used to pump water to the reservoirs located on Ramshila hills and Murlihills but now pump directly into the network. The tube wells installed in the city area are also used to pump water directly into the distribution system.

59. The Design & Supervision consultant has performed a flow measurement campaign at all tube wells in Gaya and the results are shown in the **Table 4** hereafter. During the flow measurement campaign the pumps were working for long periods. No drop in the capacity of the wells has been reported. For this reason the total water production of the tube wells in Gaya can be considered as the sum of the yield of all wells.

**Table 4: Present Water Production**

ID	Name	Discharge informed by GMC m <sup>3</sup> /h	Power Availability	No. of	Measured Flow	
			hr	Running hours	m <sup>3</sup> /h	m <sup>3</sup> /d
1	Dandibagh No. 1#	NA	23	22	0	0
2	Dandibagh No. 2	250	23	22	225	4950
3	Dandibagh No. 3	250	23	22	172	3794
4	Dandibagh No. 4	250	23	22	186	4094
5	Dandibagh No. 5	250	23	22	4	88
6	Panchayati Akhara No. 1	68	20	20	104	2083
7	Panchayati Akhara No. 2	41	20	20	94	1888
8	Azad Park	54	20	11	52	572



ID	Name	Discharge informed by GMC m <sup>3</sup> /h	Power Availability	No. of	Measured Flow	
			hr	Running hours	m <sup>3</sup> /h	m <sup>3</sup> /d
9	Dhobighat	45	20	11	37	407
10	Central School	54	20	8	79	632
11	Nigam Store	54	20	5	23	115
12	Gurudwara	54	20	10	56	560
13	Fire Station	36	20	8	55	440
14	New Godown	54	20	11	50	550
15	Kharkhus	41	20	12	46	552
16	Delha	27	20	8	45	360
17	Panchayati Akhara No. 3#	68	20			0
18	Janata Colony	14	20	9	39	351
19	Janata Colony	14	20	12	18	216
20	Pilgrim Hospital	14	20	5	17	85
21	Visnupad	73	20	8	129	1032
22	Bypass	27	20	8	80	640
23	Bairagi Powerganj	32	20	6	79	474
24	Bageshwari Pachim	14	20	8	19	152
25	Pitamaheshwar	54	20	5	65	325
26	Kauvasthan	32	20	8	17	136
27	Hata Godown	54	20	8	52	416
28	Manpur	54	20	10	93	930
29	Manpur - Buniydiganj	68	20	11	65	715
30	Khadi Gramodyog Lakhibagh	54	20	20	53	1067
31	Cotton Mill ##					
						<b>27624</b>

#Flow could not be measured due to pump break down

## TW not functional

60. **Table 4** further shows that the existing TWs are highly underutilized both from rate of pumping as well as operational hours points of views. The present total daily production works out to 27624 m<sup>3</sup>/day only.

#### ***Existing Water Distribution & Transmission System***

61. The existing distribution system is not in conformity with basic engineering practices. Part of it consists of Transmission Mains raising the water to 1 Over Head Tank and 7 Ground

Level Reservoirs. The other part is operated by pumping the tube wells water directly into the distribution network. For this portion no storage capacities are available.

### Transmission/ Rising Mains

62. There are three Cast Iron rising mains 350 mm, 50 mm and 600 mm of 3 km length each from Dandibagh to Brahmayoni Hills reservoirs. One more DI rising main 450 mm of 3.1 km length has been laid recently under the augmentation project under 12th Finance Commission program.

### Water Storage Reservoir

63. At present 7 ground level reservoirs and 1 overhead reservoir (OHT) exist in the main city area. The total capacity of the reservoirs comes to 17.7 ML.

**Table 5: Existing Storage Reservoirs**

No.	ID	Location/Name	Type of storage	Capacity [m <sup>3</sup> ]	Staging	Present condition
1	7	Ramshila Hills	GLSR	227	No	50+ years old Needs replacement
2	9	Murli Hills	GLSR	1630	No	50+ years old. Roof and inside wall in very bad condition
3	10	Azad Park	OHT	454	12.2 m	Needs slight repair from inside
4	11a	Brahmayoni	GLSR	1816	No	70+ years old. Roof and inside wall in very bad condition
5	11b	Brahmayoni	GLSR	1816	No	70+ years old. Roof and inside wall in very bad condition
6	12	Brahmayoni	GLSR	3632	No	Needs slight repair from inside
7	13	Brahmayoni	GLSR	3632	No	Needs slight repair from inside
8	14	Singraasthan	GLSR	4540	No	Although recently constructed, it leaks from various places

GLSR: Ground Level Storage Reservoirs, OHT: Overhead Tank

Note: The ID corresponds to the marking on the Drawing mentioned above

Source: DPR for Gaya water supply

64. The reservoirs constructed on Ramshila hills, Murlihills and overhead tank at Azad Park are not functional at present as these tanks are not being fed due to inadequate capacity of the pumping plants or of the transmission mains and the water is being supplied through direct pumping into the distribution network.

### Distribution Network

65. The **Table 6** summarizes the length of the existing distribution network sorted by diameter. It shows that at present length of total distribution

**Table 6: Existing Distribution Network Data**

Description	Length [km]	Dia. [mm]	Length [m]
<b>PHED</b>		100	39684
		150	16422
		200	15788
		250	2050
		300	981
		350	2140
		400	5235

Description	Length [km]	Dia. [mm]	Length [m]
	85	450	2594
		Sub-Total	<b>84894= Approx. 85 km</b>
<b>Before 1982</b>		50	436
		63	3930
		75	10952
		100	8065
		125	9166
		150	12790
		175	2633
		200	6986
		225	253
		250	3811
		300	2728
		400	2325
	65	600	645
		Sub-Total	<b>64722= Approx. 65 km</b>
<b>Total</b>	<b>150</b>		<b>149616 = Approx. 150 km</b>

66. There is no zoning in the existing distribution system. All areas connected to one reservoir are served in one go. Similarly distribution system directly fed from Tube wells (TWs) is also supplied simultaneously. There is practically no chlorination system for disinfection of water supplied. The chlorination system wherever provided is either not functioning or highly undependable resulting in a high health risk. It has to be mentioned at this stage that part of the pipelines laid under PHED have not been handed over to GMC but are presently in use. After completion of project pipeline will be transferred to GMC. GMC will be the owner and PHED will execute any work on behalf of GMC.

#### **Consumers' Connections**

67. There are around 12500 registered consumers in the town. However, there is large number of unauthorized and unidentified consumers connected to the distribution system. According to the information collected from Wards Counselors the total number of connections is about 29000. There is no metering of water supplied to consumers and no water billing system. Water charges are levied as part of the Holding Tax on properties by the GMC.

68. At present there are 1074 Public Stand Posts in the city which are being used by people not connected with individual connections for drinking purposes. Not all are functional and the number of households using them has been collected from the wards counselors.

#### **Recent and Ongoing Construction Work**

69. Government of India sanctioned a project under 12th Finance Commission program to augment water supply of the town in the year 2007. This project involved construction of battery of Tube Wells on the bank of river Phalgu near Dandibagh and also in various parts of the town

to increase water production by 16 MLD and provide distribution system for the newly developed areas like Manpur, AP Colony, etc. The work on this project is being executed by Public Health Engineering Department of GoB on behalf of Gaya Municipal Corporation (GMC) and is in advanced stage of completion. The highlights of the works as communicated by PHED are as follows:

- Transformers – Out of total 5 installed 3 are complete
- 8 nos. of tube wells – Completed
- 8 nos. of Pump houses – Completed
- Pumps and motors – 8 nos. provided, 1 currently working
- Rising Mains – laying of 2500m completed
- Gravity Mains – laying of 3433m out of total 4000m completed, the works of Sluice Valves and sluice valve chambers are 50% complete
- Service reservoir – Completed
- Distribution Network – Out of proposed total 84894m the length laid is 47966m. large portion of the total length laid was not handed over to GMC.

70. Existing Bodhgaya water supply system located upstream of Gaya is from Phalgu River bed and part from 6 existing tube wells at upstream. Further 12 new tube wells are under final construction stage, those are funded by JnNURM scheme.

71. Gaya water supply system, particularly tube wells, rising mains, and reservoirs shown in **Figure 1**.

#### **B. Justification of the proposed water augmentation project**

72. The proposed water supply improvement project for Gaya is planned after analyzing the present situation and proper justification.

73. The subproject is needed because the present water supply system of Gaya is inadequate for the needs of the growing population. Per capita supply is low as 40 liters per capita per day (lpcd) which is below the required 135 lpcd and the unaccounted for water (UFW) is around 40%. The storage and distribution network is insufficient and old to meet even present requirements. Improvement and rehabilitation in the water supply system has been identified as a major priority for Gaya. The objective of this sub-project is to provide continuous (24x7) pressurized, safe water of 135 lpcd to the entire population, through household connections where feasible, at the required minimum pressure head. In other words, the water service will meet the Indian National Service Level Benchmarks.

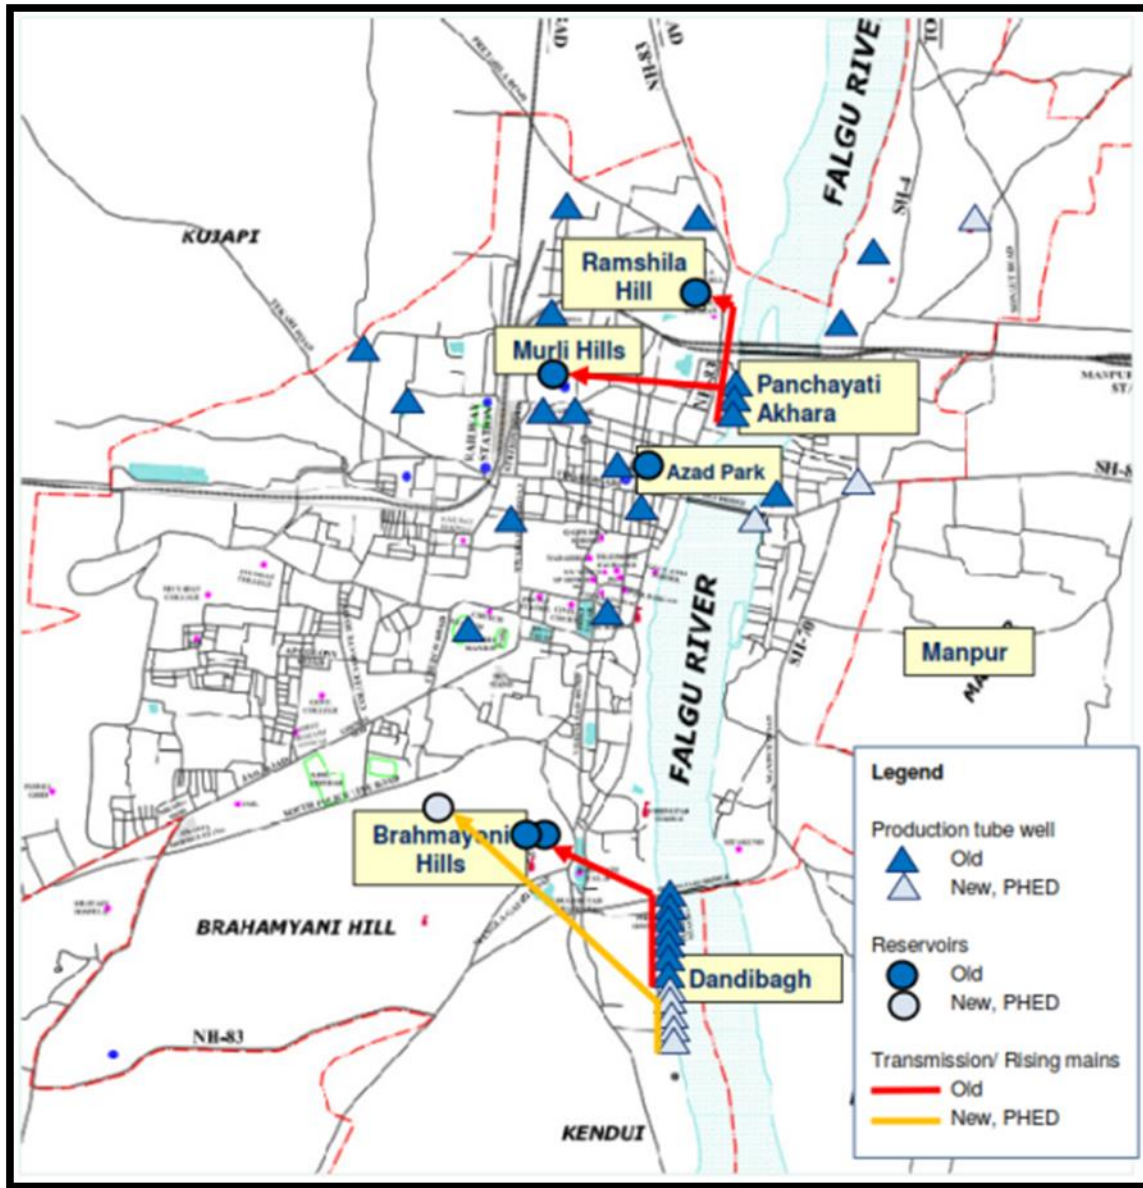


Figure 1: Gaya existing water supply system: wells, rising mains, reservoirs

### C. Water Sustainability

74. Hydrogeological study has been conducted at Gaya in the year 2014. Based on the hydrogeological assessment studies of the ground water potential zone of Gaya, it is observed that present ground water abstraction of 24,000 m<sup>3</sup>/day for 75 days (when the river Phalgu is dry) is hardly 31.50 % of the total sub-surface water storage (5.70 mcm) within 2 m of aquifer in 14.25 km<sup>2</sup> of the ground water potential zone during summer months.

75. Similarly, with the ground water abstraction of 124 MLD for 75 days of 9.30 mcm from the sub-surface water storage of 25 m thick aquifer of 53.43 mcm will be 17.40 % and it will

lower the water level by 4.35 m, still keeping the aquifer thickness of 20.65 m which is considered as sufficient to sustain the yield of tube wells.

76. ***It is concluded from the study that despite lowering of water level by 4.35 m during summer months, the tube wells will sustain the yield and will restore original yield as soon as Phalgu river starts flowing after getting the first spell of rainfall in mid -June.***

77. The impact of pumping 124 MLD during the summer months (75 days) can be further reduced if the well fields are increased instead of having only one well field of Dandibagh. Two more well fields can be developed, one near village Kendui and another near Kendua on the left bank and fourth near Manpur - Buniyadgunj on the right bank. By having four different well fields, there will be less pumping from a small area of a well field, thereby creating a small ground water depression and less lowering of water level around it.

78. **Appendix 2** shows section related to water sustainability study and impact related to water abstraction from Phalgu river bed.

#### **D. Proposed Subproject Gaya Water Supply Package 1 (GWSP1)**

79. Gaya Water Supply Project is divided in two packages, GWSP1 and GWSP2. The first package consists of:

- a. Redevelopment of 29 existing wells and rehabilitation of their pumping equipment to ensure a total production capacity of 68 MLD;
- b. Renovation of 8 existing storage reservoirs and construction of 8 new reservoirs;
- c. Laying of 17.285 km new transmission / rising mains from existing wells to reservoirs, ranging in diameter from 150 to 600mm;
- d. Laying of 447 km distribution network including parallel laying along old pipeline. The network will be divided in 30 District Metered Areas (DMA) to improve the operations of the network;
- e. Construction of service connections
- f. Operation of the entire water supply system, i.e. the existing system and that constructed under GWSP1.

80. The Figures / Maps and Tables below present the locations and characteristics of the various components of GWSP1.

**Table 7: Tube wells: proposed duty condition for refurbishment – GWSP1**

ID	Name	Discharge m <sup>3</sup> /h	Head m	Motor HP	Operating Hours	Daily Production MLD	Remarks
1	Dandibagh No. 1	220	85	105	23	5.06	
2	Dandibagh No. 2	220	85	105	23	5.06	
3	Dandibagh No. 3	220	85	105	23	5.06	
4	Dandibagh No. 4	220	85	105	23	5.06	
5	Dandibagh No. 5	220	85	105	23	5.06	
6	Panchayati Akhara No. 1	100	65	40	20	2.00	
7	Panchayati Akhara No. 2	100	65	40	20	2.00	
8	Azad Park	55	49	25	20	1.10	
9	Dhobighat	40	69	20	20	0.80	
10	Central School	75	71	35	20	1.50	
11	Nigam Store	20	71	10	20	0.40	
12	Gurudwara	55	71	25	20	1.10	
13	Fire Station	-	-	-	-	-	Used for Fire fighting
14	New Godown	55	71	25	20	1.10	
15	Kharkhus	40	53	15	20	0.80	
16	Delha	40	53	15	20	0.80	
17	Panchayati Akhara No. 3	100	65	40	20	2.00	
18	Janata Colony 1	40	71	20	20	0.80	
19	Janata Colony 2	20	71	10	20	0.40	
20	Pilgrim Hospital	20	49	7.5	20	0.40	
21	Visnupad	130	95	70	20	2.60	
22	Bypass	75	95	45	20	1.50	
23	Bairagi Powerganj	55	71	25	20	1.10	
24	Bageshwari Pachim	20	69	10	20	0.40	
25	Pitamaheshwar	75	71	35	20	1.50	
26	Kauvasthan	20	49	7.5	20	0.40	
27	Hata Godown	55	71	25	20	1.10	
28	Manpur	100	69	40	20	2.00	
29	Manpur - Buniydiganj	75	43	20	20	1.50	
30	Khadigramodyog Lakhibagh	55	47	15	20	1.10	
31	Cotton Mill	-	-	-	-	-	Non-functional
32	Krilosker-1	150	129.1	85	0	0	No Replacement proposed
33	Krilosker-2	170	129.1	100	20	3.4	- Do -
34	Krilosker-3	75	129.1	35	20	1.5	- Do -
35	Krilosker-4	170	129.1	100	23	3.91	- Do -
36	Krilosker-5	170	129.1	100	23	3.91	- Do -
37	Krilosker-6	170	129.1	100	0	0	- Do -
38	Krilosker-7	170	129.1	100	0	0	- Do -
39	Krilosker-8	75	76	35	20	1.5	- Do -
<b>Total</b>						<b>67.92</b>	<b>say 68 MLD</b>

**Table 8: Proposed Service Reservoir Details – GWSP1**

ID.	Reservoir Location	ML	DMAs connected	DMAs Demand (MLD)		TW
				2048	2018	Connected
1	Joda Maszid	2.15	2, 3	12.71	7.39	29, 32
2	Patan Toli (Phase-II)*	*1.0				
3	Budhva Mahadev	1	1	2.25	1.18	New T/W proposed
4	Mastalipur	2	4, 5	7.587	3.8	28, 33

5	Bhusanda Mela	2.15	6, 7	8.592	4.45	34,30
6 &7	Ramshila Hill GLSR	#0.22+ 2.6	8, 9	10.248	5.31	6, 7, 9, 17, 24,31
8	Murli Hills GLSR	#1.630	10	5.326	3.58	10, 11, 12, 14, 18, 19, 23, 25, 27
9	Azad Park	#0.45	Ward 15, DMA 13	2.324	1.25	8, 20, 26
10c	Brahmayoni Hills GLSR	4.64	11, 12, 13, 14, 17,	68.763	41.44	1, 2, 3, 4, 5
10d	Brahmayoni Hills GLSR	4.64	21, 22, 23, 24, 25, 26, 27			
10a	Brahmayoni Hills GLSR	#1.816				
10b	Brahmayoni Hills GLSR	#1.816				
11	Brahmayoni Hills GLSR	#3.632				
12	Brahmayoni Hills GLSR	#3.632				
13a+13b	Singra Sthan	#4.54 & 3.7	15, 16, 18, 19, 20	32.698	14.59	35, 36, 37, 38, 39
14	Behind Delha PS 1A	1.5	29	5.546	2.77	15, 16
16	Behind Delha PS 1	2.15	28, 30	7.27	3.5	21, 22
Notes:# Existing Reservoirs;                   *Reservoirs proposed in Phase II						




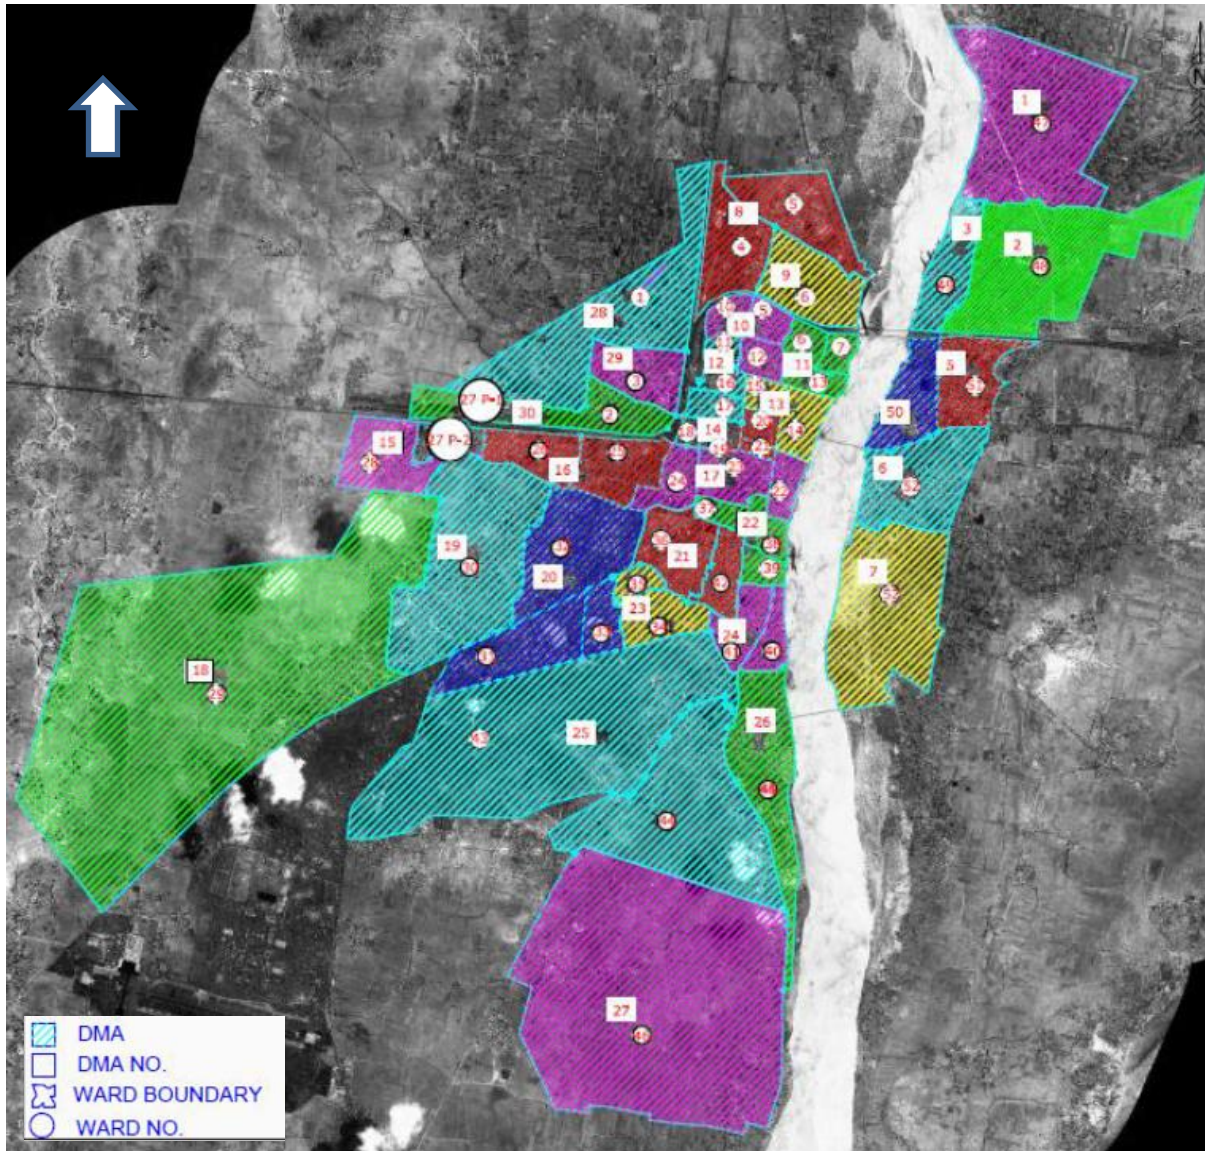


Figure 2: Distribution Network: proposed demarcation of DMAs – GWSP1

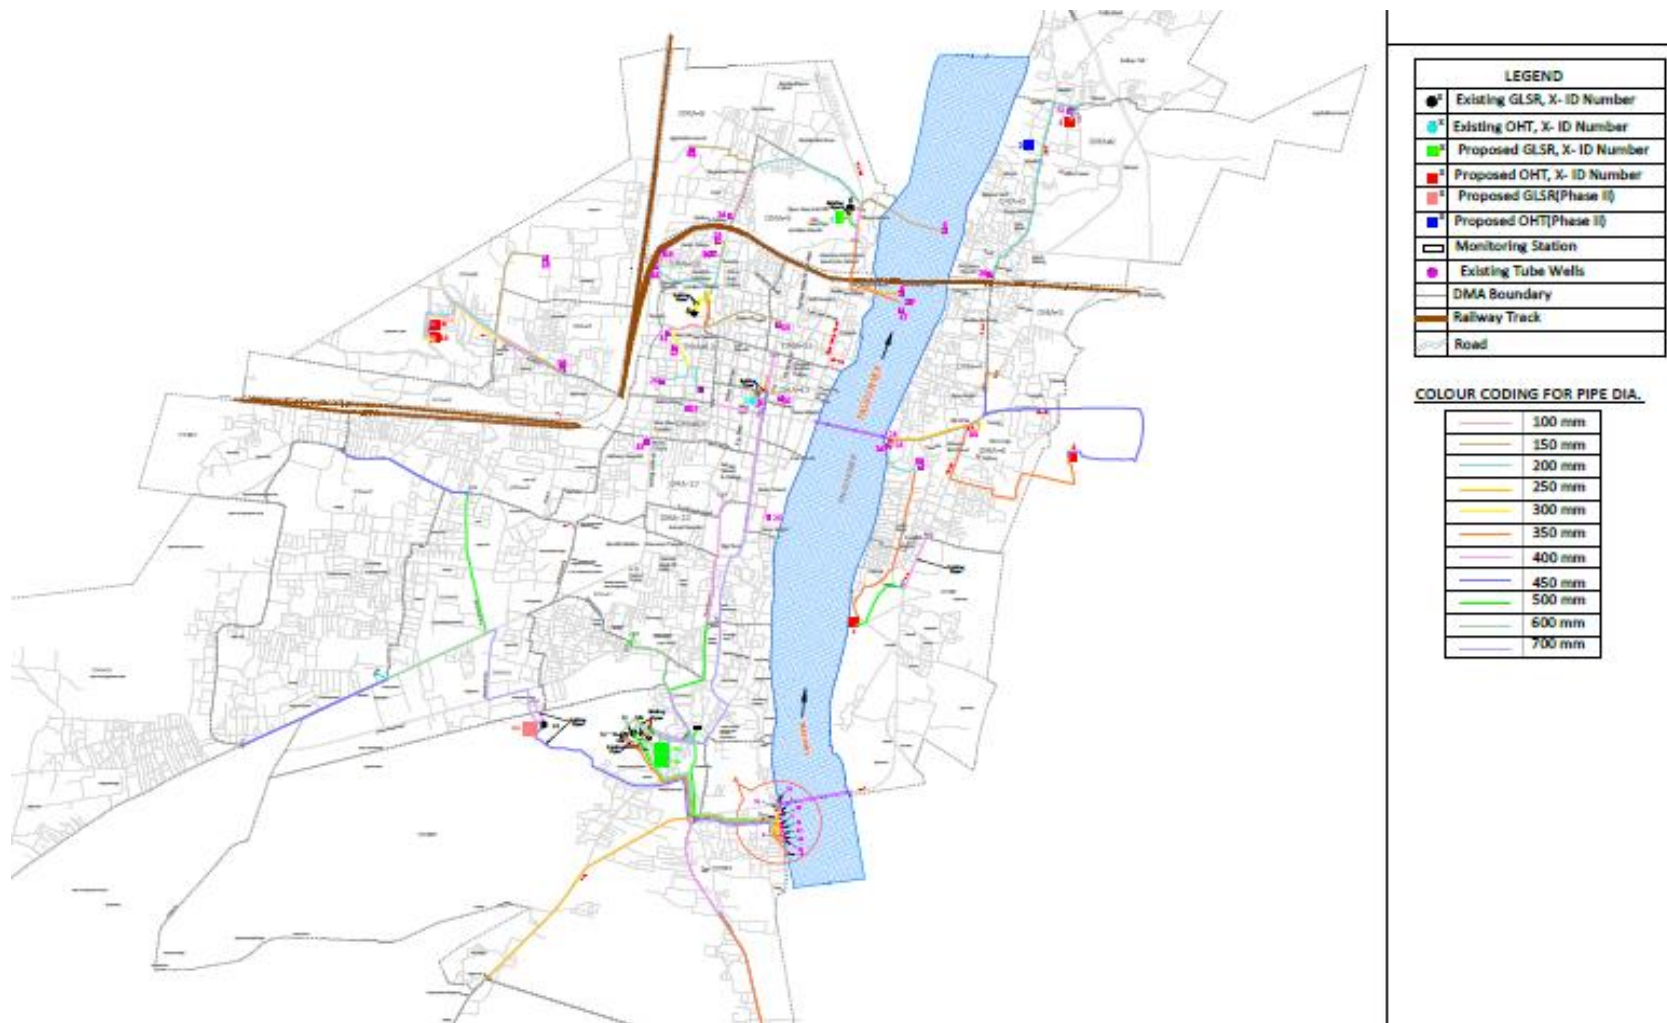

Note: the map shows both rising mains from wells to reservoirs, and feeder mains from reservoirs to DMAs.

**Figure 3: Locations of tube wells, reservoirs and transmission mains – GWSP1**



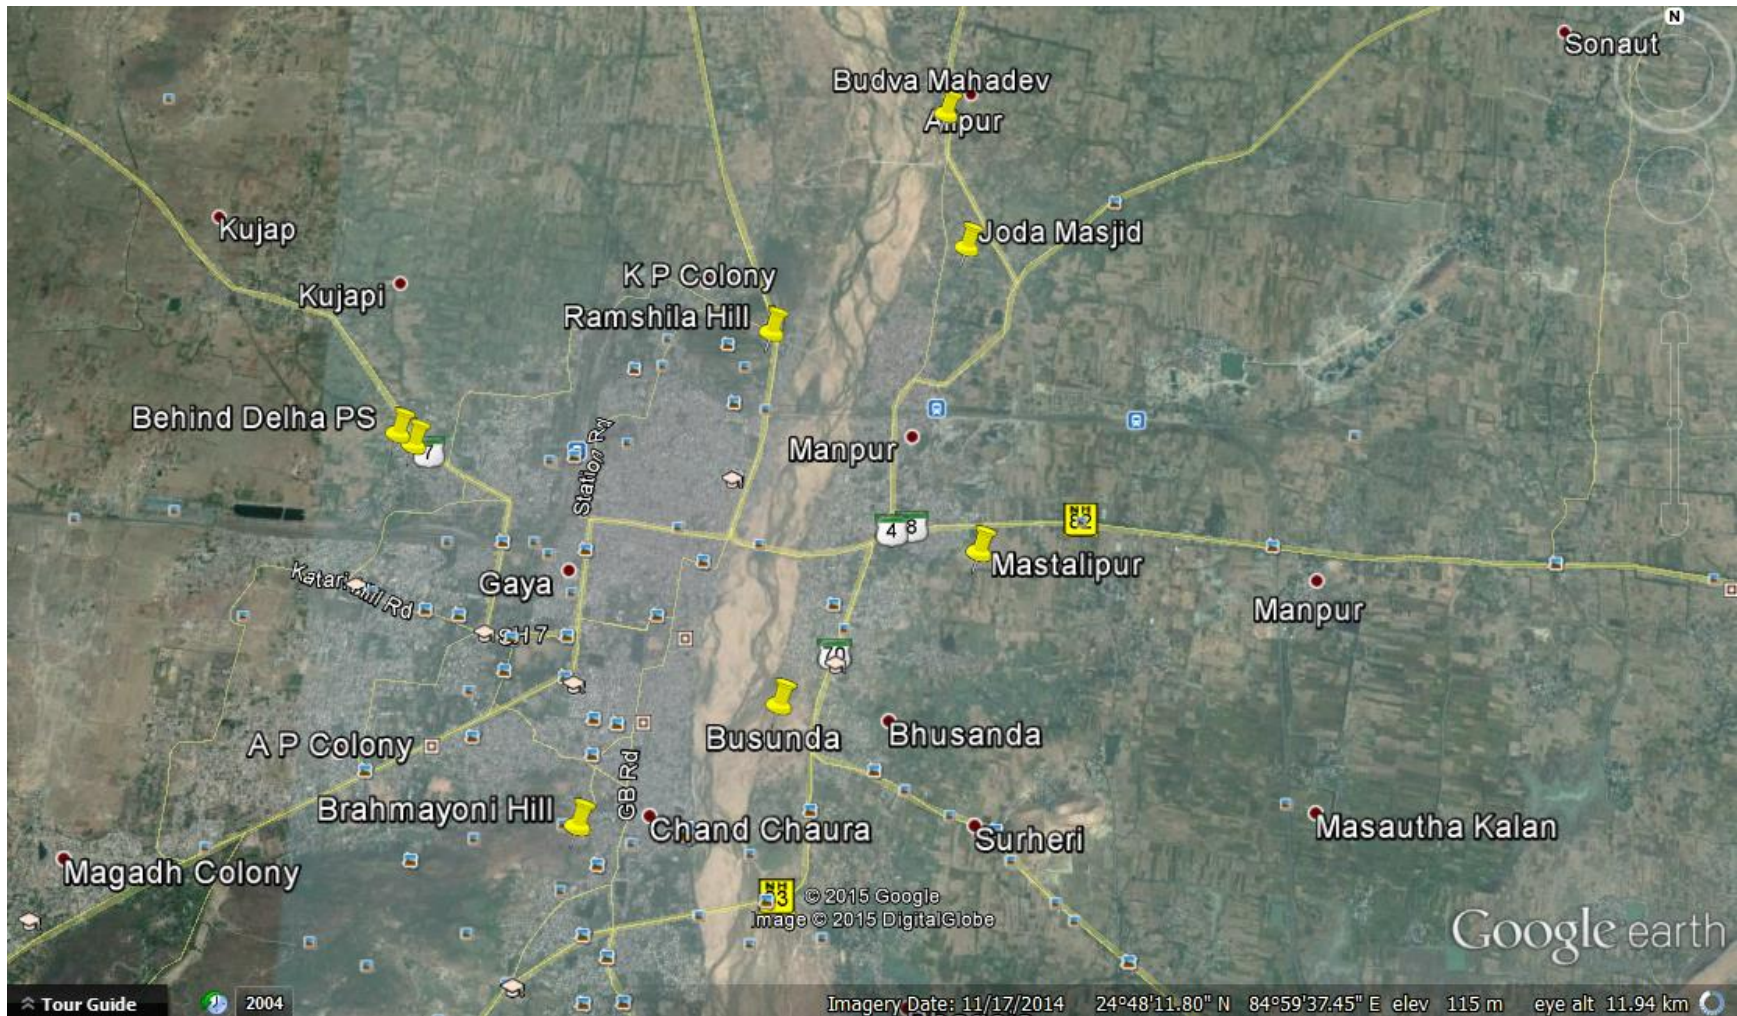


Figure 4: Location of water storage reservoir Under GWSP 1

81. *The IEE for GWSP1 has been prepared as a separate report and is not further subject of this present IEE.*

#### **E. Proposed Subproject and Components – Gaya Water Supply Package 2**

82. The subproject GWSP2 is complementary to GWSP1 and concerns the construction of new production tube wells, transmission mains, two reservoirs and associated pumping stations. The package is also proposed to include a new Operator Office to be constructed at the Dandibagh Water Works compound. In addition, the package will include operation of the new GWSP2 facilities by the contractor to be engaged for the works.

83. Core element of the subproject is the development of a new water source. For that purpose extensive investigations have been carried out under BUDIP.

84. **Tube wells.** The designer has assessed the town's water demand for the medium term (year 2033) at 126 MLD. Of this 68 MLD will be provided from 39 existing production tube wells that will be rehabilitated under GWSP1. The balance 58 MLD is proposed to be provided under the present subproject GWSP2 by the construction of 24 new tube wells. The new tube wells will tap the aquifer of the Phalgu riverbed at various locations as shown in **Figures 5 and 6A to 6D**. Several of the tube wells, each having an expected yield of 100 to 130 m<sup>3</sup>/h, will be constructed as batteries of wells, space relatively closely. It must be noted that the capacities of the wells have not yet be fixed. This will be done by drilling and construction of exploratory wells and adjacent observations well, and carrying out long-duration pumping tests to determine aquifer characteristics and safe yields for each well. It is possible that the allowable yields per well are more than the 100 to 130 m<sup>3</sup>/h and that less than 24 wells are required. **Table 9** summarizes the proposed well locations, the water production capacities and the reservoirs they will be feeding.

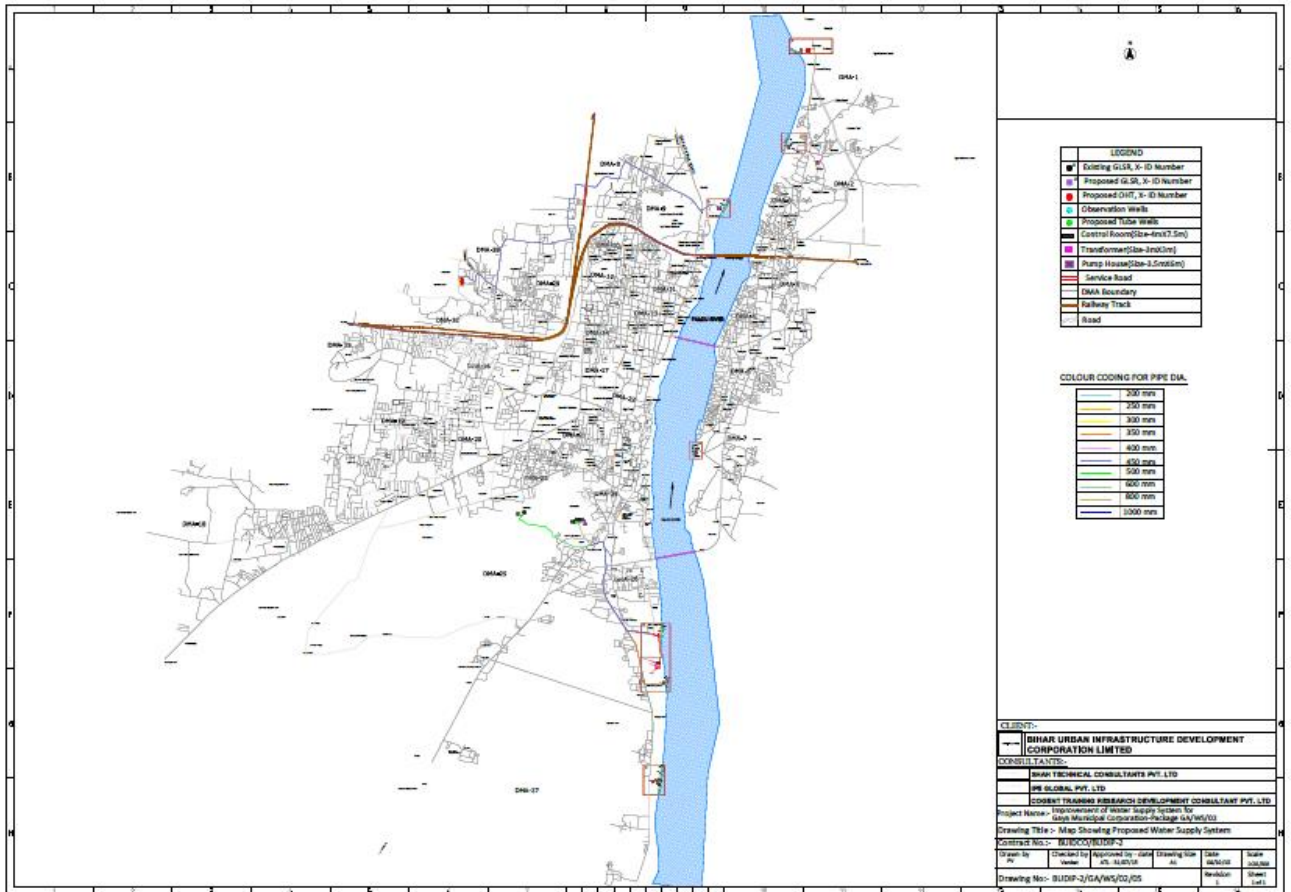


Figure 5: GWSP2, location of proposed production wells and transmission mains, reservoir (total)

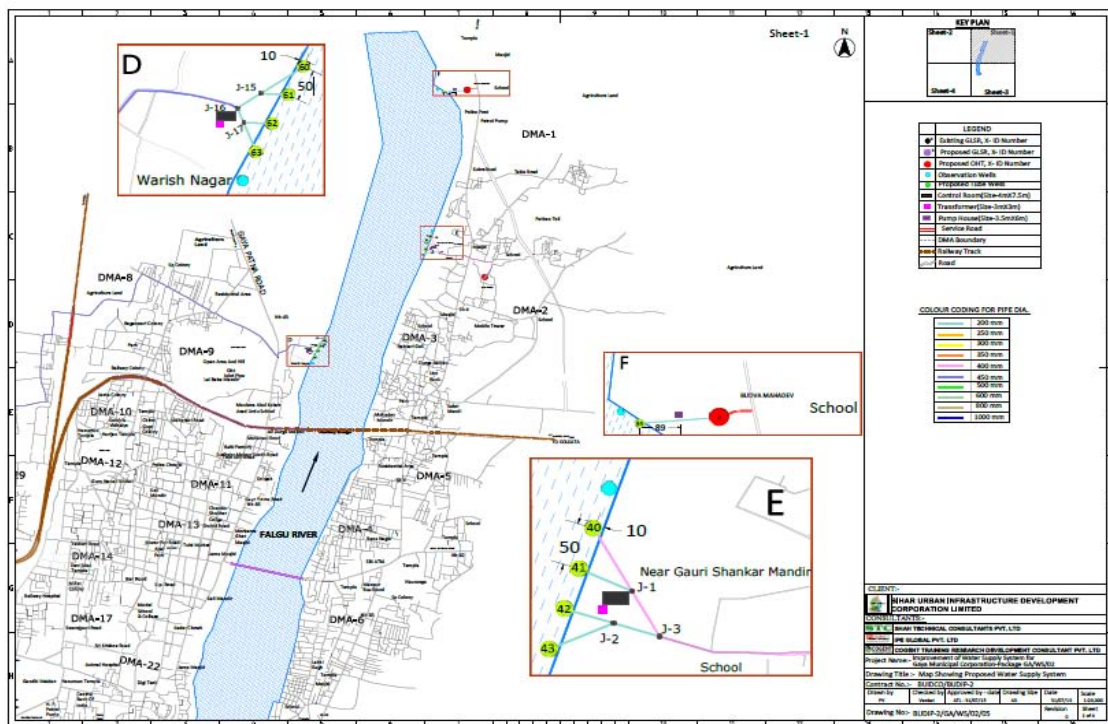


Figure 6A: Section drawing GWSP2



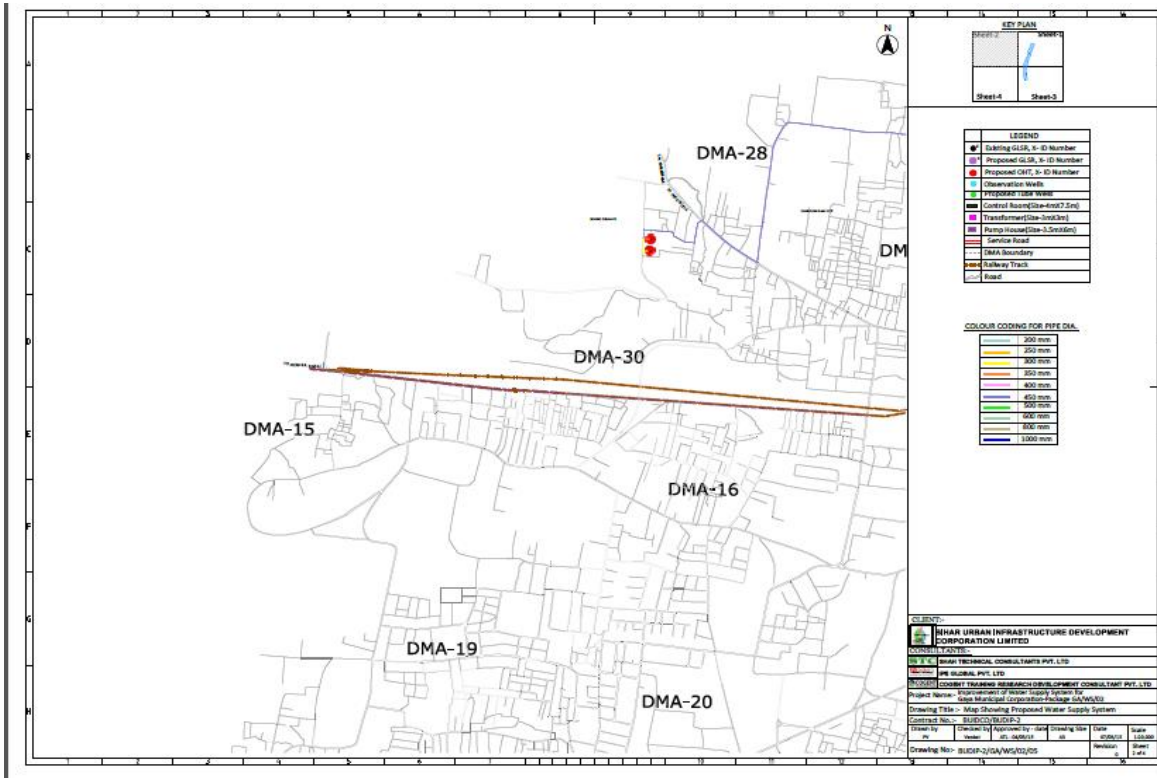


Figure 6B: Section drawing GWSP2

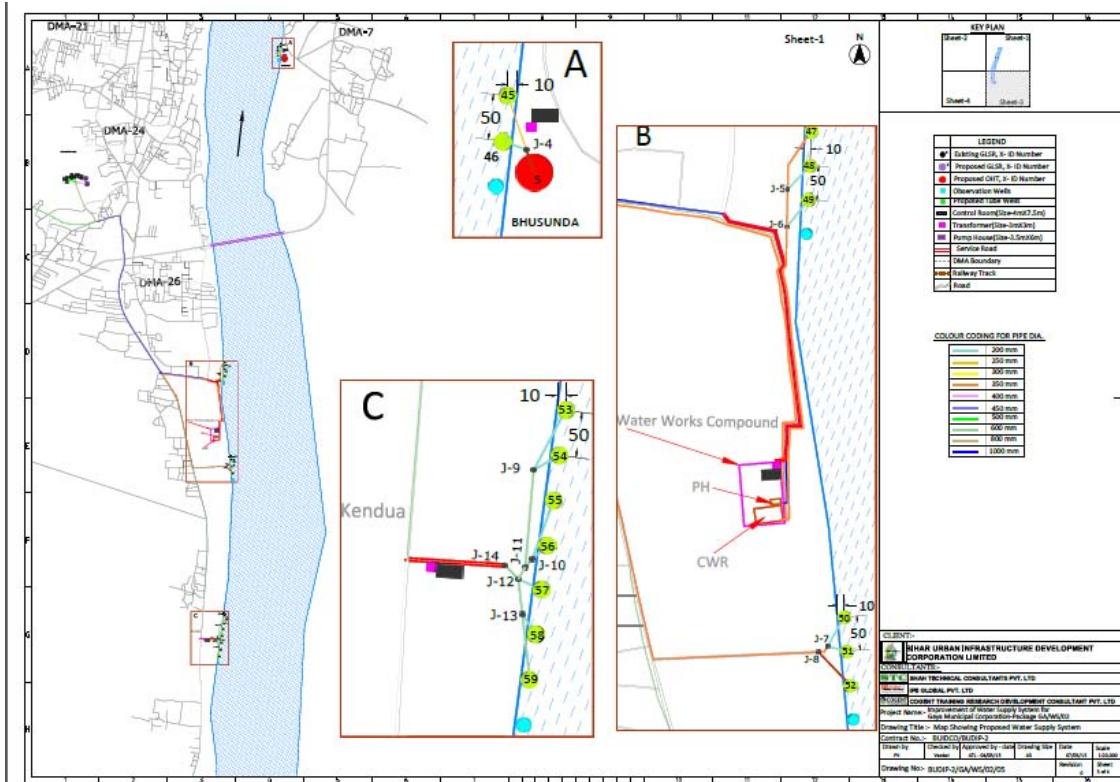


Figure 6C: Section drawing GWSP2

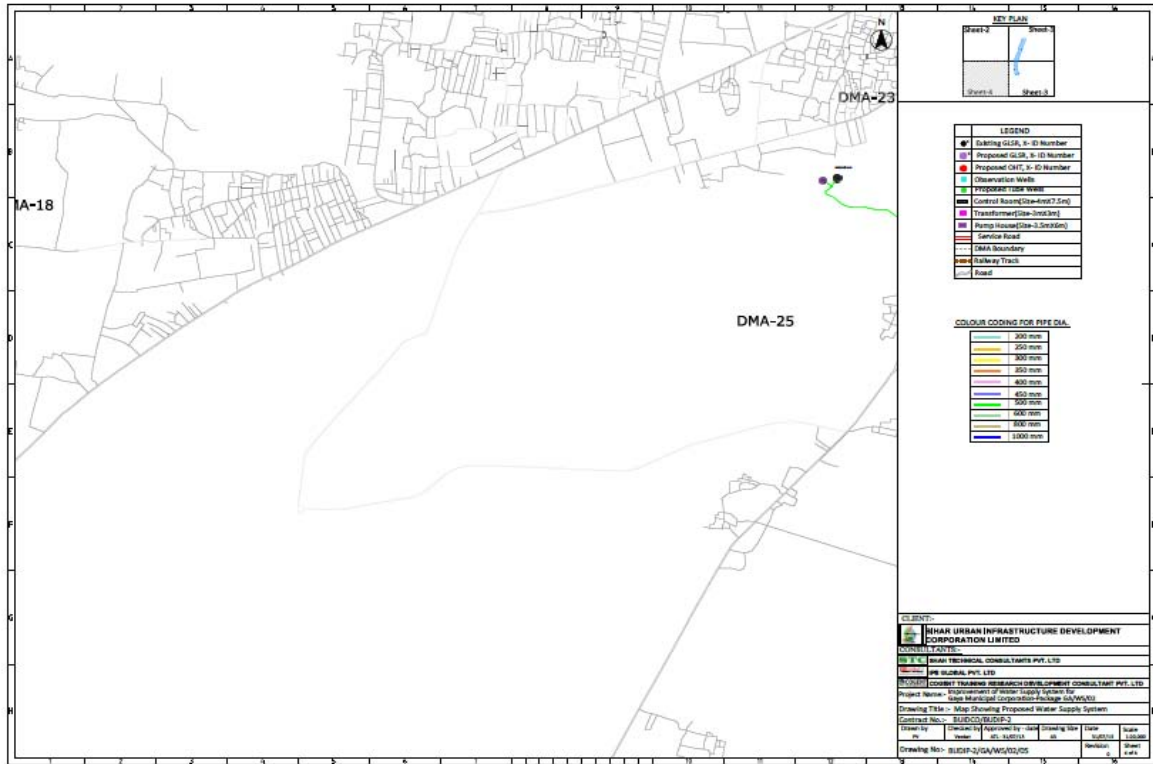


Figure 6D: Section drawing GWSP2

Table 9: Ground water potential zones and connecting reservoirs

S. No.	Tube well locations / Potential zones	Proposed	Tank ID.	Tank Location	Tank capacity ML	Land required	DMA No.	Demand (MLD)
		TW ID No.				(m x m)		2033
1	River bed near School at Gauri Shankar Mandir	40, 41,42,43 (4 nos.)	1	Joda Maszid	2.15	10 x 10 for single TW Total= 400 m <sup>2</sup>	2, 3	8.0
			2	Patan Toli (Phase-II)	*1.0	Phase-2		
2	River bed near Budhva Mahadev Mandir	44 (1 no.)	3	Budhva Mahadev	1	10x10	1	2.0
3	River bed near Bhusanda Mela	45,46 (2 nos.)	5	Bhusanda Mela	2.15	10 x 10 for single TW Total= 200 m <sup>2</sup>	6, 7	4.0
4	River bed near Dharamshala	60, 61, 62, 63 (4 nos.)	14	Behind Delha PS 1A	1.5	10 x 10 for single TW Total= 400 m <sup>2</sup>	29	8.0
			16	Behind Delha PS 1	2.15		28, 30	

S. No.	Tube well locations / Potential zones	Proposed	Tank ID.	Tank Location	Tank capacity ML	Land required	DMA No.	Demand (MLD)
		TW ID No.				(m x m)		2033
5	Govt. Polytechnic College	47,48,49 (3 nos.)	17	CWR	4.00	CWR- 90 X 60 10 x 10 for single TW Total= 1300 m <sup>2</sup>	11, 12, 13 part-2, 14 to 27	39
6	Kendui	50,51,52 (3 nos.)						
7	Kendua	53, 54, 55, 56, 57, 58, 59 (7 nos.)						

Source: DPR for GWSP2, July 2015

85. **Rising Mains.** It is proposed to supply water through OHTs or GLSRs on Hills. **Table 10** below details the lengths and sizes of pipe lines proposed to be provided to connect tube wells to respective Service Reservoirs. All pipes for pumping mains will be of Ductile Iron K9. The pipe sizes have been worked out on TW discharge capacity based on most techno-economic consideration over a period of 30 years. Inlet pipe to every reservoir is designed for water demand of year 2048.

**Table 10: Proposed Rising Main Details**

S. No.	Diameter of Pipe (mm)	Length (m)
1	200	1417
2	250	217
3	300	351
4	350	8086
5	400	21
6	450	157
7	500	89
8	600	4100
9	800	329
10	1000	2284
<b>Total</b>		<b>17051</b>

Source: DPR for GWSP2, July 2015

86. **Reservoirs.** In addition to the existing storage capacities and the storage reservoirs proposed in package-1, there is a ground level reservoir is proposed on SingraSthan hills to meet the required storage capacities. A break pressure tank or clear water reservoir is proposed in Govt. ITI college campus. The pumping mains from tube wells at ITI College, Kendui and Kendua are connecting to Clear water reservoir of 4.0 ML capacity. The proposed reservoir details are shown in **Table 11** and in **Figure 5** above.

**Table 11: Proposed Reservoirs under GWSP2**

Reservoir location	Capacity ML	Land required	Connected water source	Connected
		(m x m)	TW No.	DMA No.
Clear water Reservoir (CWR) at Govt. ITI	4.0	90 X 60	47,48,49,50,51,52,53,54,55,56,57,58,59	11, 12, 13 (part-2) 14, 17, 21, 22, 23,24, 25, 26, 27,
GLSR on Singra Sthan hills	3.7	45 X 45		15, 16, 18, 19, 20

Source: DPR for GWSP2, July 2015




87. **Pumping Equipment.** The 24 proposed new tube wells with expected water production capacities of 100 to 130 m<sup>3</sup>/h each, will be equipped with submersible pump sets ranging from 15 to 26 kW. The new CWR will be fitted with 6 numbers (4W + 2S) of 132 kW vertical pump sets.

88. **Electrical Systems.** It is proposed to provide a dedicated 11kV power supply with 11/0.415kV transformers (1 W + 1S) at the following locations with transformer capacity as follows:

- CWR 1000kVA
- Budhva Mahadev, 4 wells 200kVA
- Kendui, 7 wells 250kVA
- Joda Mazjid, 4 wells 250kVA

89. This will thus cater for 15 tube wells plus the CWR. The other 9 tube wells will be provided with 433V power supply directly from the Electricity Board.

90. **Operator Office.** One Operator Office is included to be constructed at Dandibagh Water Works compound. It shall serve the Contractor/Operator to be engaged under GWSP1 who will be responsible for developing and improving the overall operations and management of the city's water supply system. GMC staff deputed to the contractor will work from the same office, which will be handed back to GMC upon completion of the contract. A three-story building with a footprint of 500 m<sup>2</sup> is foreseen of which the first two floors will be constructed under GWSP2 to accommodate 60 people. **Figure 7** shows the location of the proposed office building within the water works compound, where an area of 1000m<sup>2</sup> is reserved.

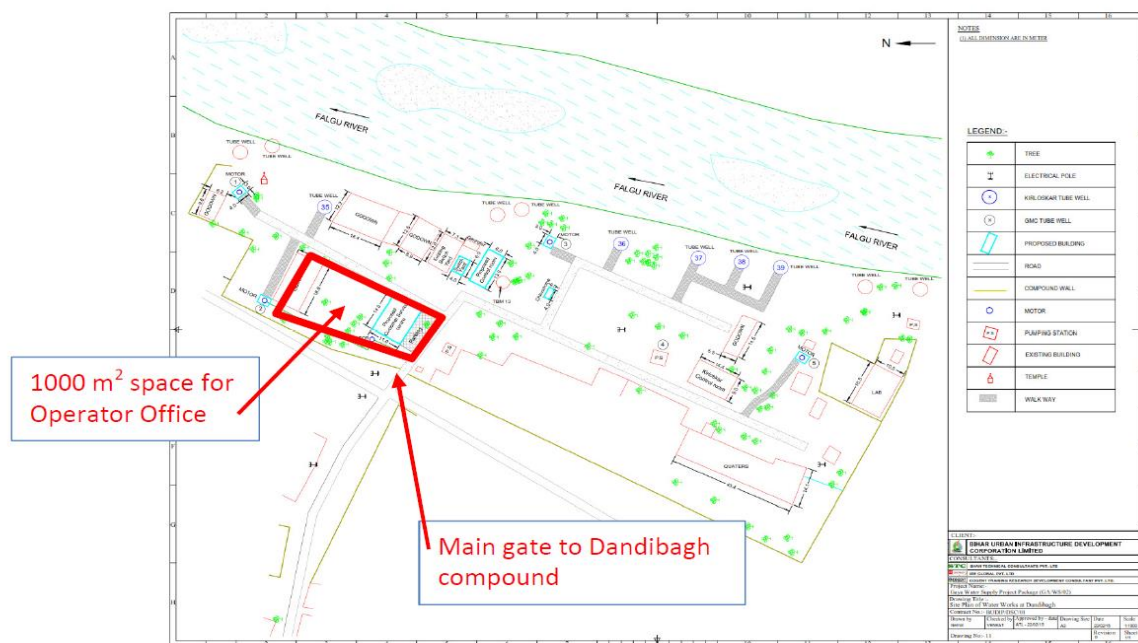

**Figure 7: Proposed Operator Office Building at Dandibagh compound**

91. **Salient features of civil work:**

- Area of building 14 X 11 M
- About 60 people shall be accommodated in the Utility Office.
- In the future the number will/may increase, also with sewerage-related staff.

- The building is to be constructed in 2 stages:
  - Stage 1 - 60 people,
  - Stage 2 - 30 people. (later after this package)
- This is to be realized by planning a 3-storey building, with the ground and first floor to be constructed in Stage 1. The first stage of 60 people includes both Contractor's and GMC operating staff.

92. **Appendix 3** shows photo illustration and location details of project components in Google map.

93. **Appendix 4** shows site management plan drawing for 2 water storage reservoirs site.

94. **Table 12** shows the components of the subproject based on the present proposals which are expected to be substantially correct, although certain details may change as development of the subproject progresses.

**Table 12: Description of the proposed water supply subproject GWSP2**


Component	Function	Description	Location
General	Improvement of water supply system in Gaya city	<ul style="list-style-type: none"> <li>➤ Satisfy the future needs</li> <li>➤ To supply quality water to new areas and existing area with sufficient quantity</li> </ul>	Gaya city
Construction of tube well	Increase water quantity through construction of new tube well Quality of the supply water get improved through disinfection	Construction of 24 nos. tube wells Provision of one Electro Chlorinator at each Tube Well capable of producing 1kg/hour chlorine for disinfection at source	Locations are, Gauri Shankar Mandir Budhva Mahadev Mandir Bhusanda Mela Dharamshala (Warish nagar) Polytechnic College Kendui Kendua
Laying rising/transmission mains from tube wells to overhead tanks/ground level service reservoirs	Connecting tube wells with the existing/proposed storage tanks	Approx. Length-17.051 km	Corresponding to the location of tube wells
Construction of one Clear water Reservoir and one Ground Level Storage Reservoir	Storage of water	Capacity 4.0 ML (Polytechnic College) and 3.7 ML(Singrasthan)	CWR at Polytechnic College, and one Ground Level Service Reservoir (GLSR) on Singrasthan Hill.

Component	Function	Description	Location
Construction of Operator Office	Office for overall operations and management of the city's water supply system	1000 m <sup>2</sup> space for office building	At Dandibagh Water Works compound

Source: DPR Gaya water supply, July 2015

#### F. Implementation Schedule

95. The proposed sequence of the works implementation under Gaya Water Supply Project, GWSP2 is as given in the **Figure 8**. This package (GWSP2) is item rate contract.

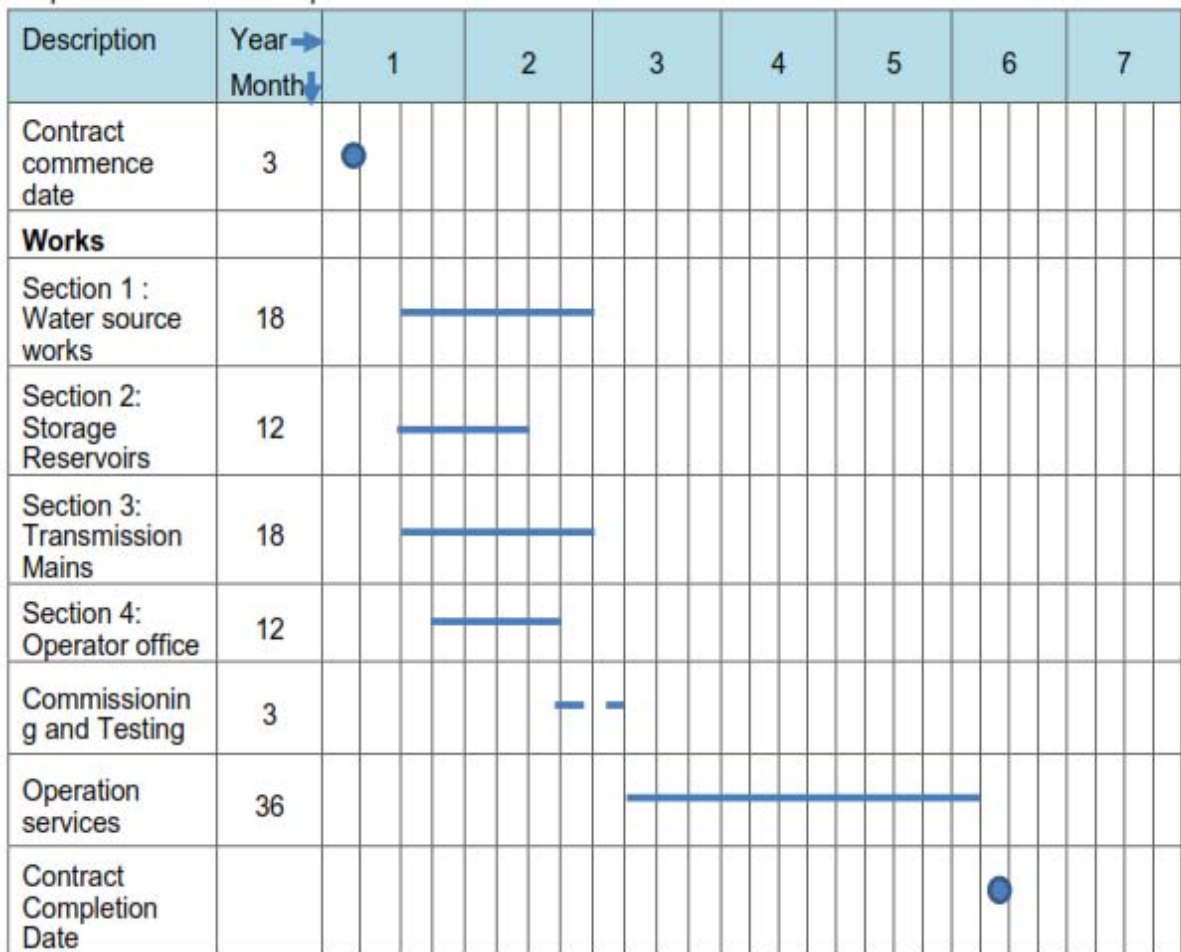

**Figure 8: Implementation Schedule**

### III. DESCRIPTION OF THE ENVIRONMENT

#### A. Physical Resources

##### 1. Administrative Boundaries

96. Gaya is located in south central Bihar on the banks of the River Phalgu, between  $84.4^{\circ}$  and  $85.5^{\circ}$  east longitude and  $24.5^{\circ}$  and  $25.1^{\circ}$  North latitude. It is the district headquarters City of Gaya District and is situated at about 100 km south of State Capital Patna (**Figure 9**). Gaya is a prominent and most important religious centre for Hindus. The City is well connected by road and railways with the State Capital Patna and other Cities in the State. Bodh Gaya, situated at 13 km south of Gaya, is a world famous Buddhist Centre, which attracts significant number of international tourists. Gaya has an airport to serve for this purpose.

97. Gaya is a Municipal Corporation with an area of 50.17 sq km. It is divided into 53 wards and had a population of 4, 63,454 (Census 2011). The gross population density of the city is 78 persons per hectare. **Figure 10** shows Gaya city map.

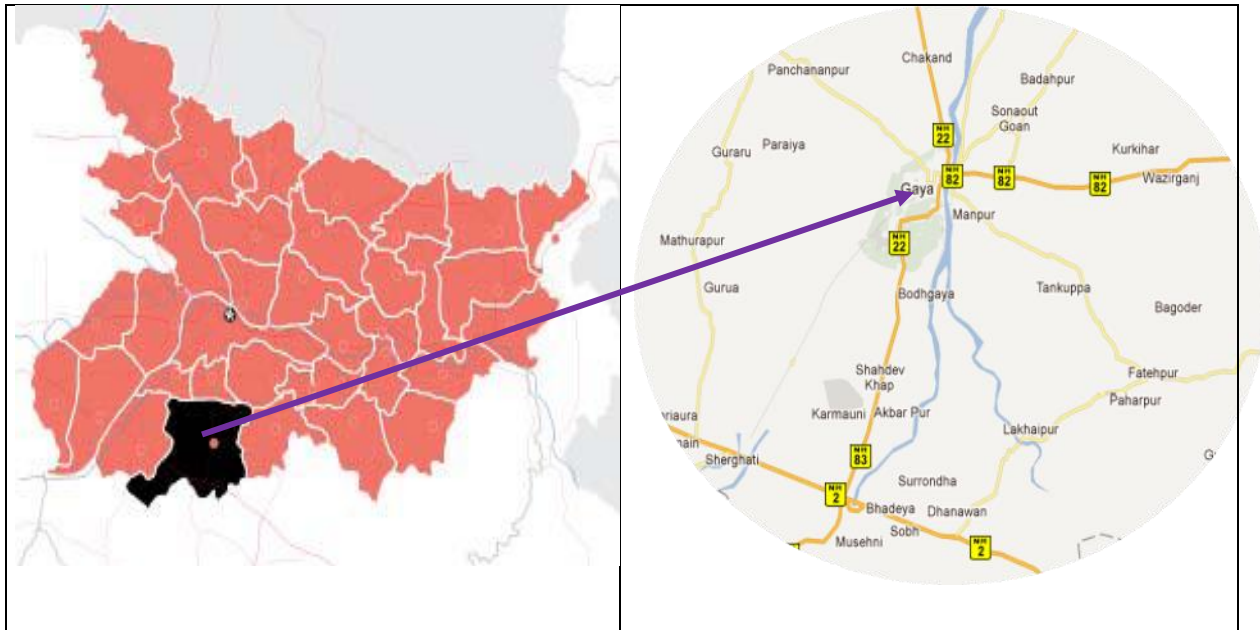


Figure 9: Location of Gaya in Bihar




Figure 10: Gaya City

## 2. Topography, Drainage, and Natural Hazards

98. **Topography.** The historical City of Gaya is developed along the banks of River Phalgu, a tributary of River Punpun, which in turn is a tributary of River Ganga. The elevation of the area on an average is 110 m above MSL (Mean Sea Level). Gaya is located in the transit region between the uplands of Chhotanagpur Plateau and Gangetic plains of South Bihar extending from Patna. There are a ring of hills around the City in the north (known as Ramshila), west (Katari Hill), and south (Brahmyoni). Except these hilly areas, topography of the City is flat, and gently slopes and drains into the River Phalgu, flowing from south to north. City is mostly developed on western side of the river, while new development is seen on the eastern side.

99. **Drainage.** General topography of the Gaya city is flat with some small hillocks in and around the city. River Phalgu divides the city into two parts. The portion located on the west bank of the river is much larger comparing to the portion located on the eastern bank of the river. Natural gradient of the Gaya Municipal Corporation (GMC) area is such that the portion of the GMC area on the west bank, slopes from west to east and south to north whereas the portion on the east bank of the river slopes from east to west and from south to north. As a result, storm runoff from both sides of the river normally flows towards the River Phalgu which flows along south-north direction. Average annual rainfall of the region is about 1150mm. The existing storm water drainage system of the Gaya is based on gravity flow. Depending on the existing topographical features, the city is divided into four drainage zones namely Central, North-Western, Western and Eastern zones. The existing drains are mostly outfall to the River Phalgu or open lands at Katari and Kondinava and Kujapee drain. Partial flow of Kujapee drain is leading to Jamune River that flows parallel to the river Phalgu, through the western fringe of Gaya, about 6 km from municipal boundary. Remaining flow of Kujapee drain finds its way to agricultural land. About 80 percent of the GMC area is covered

under drainage network. Most of these drains were constructed during the period from 1932 to 1944.

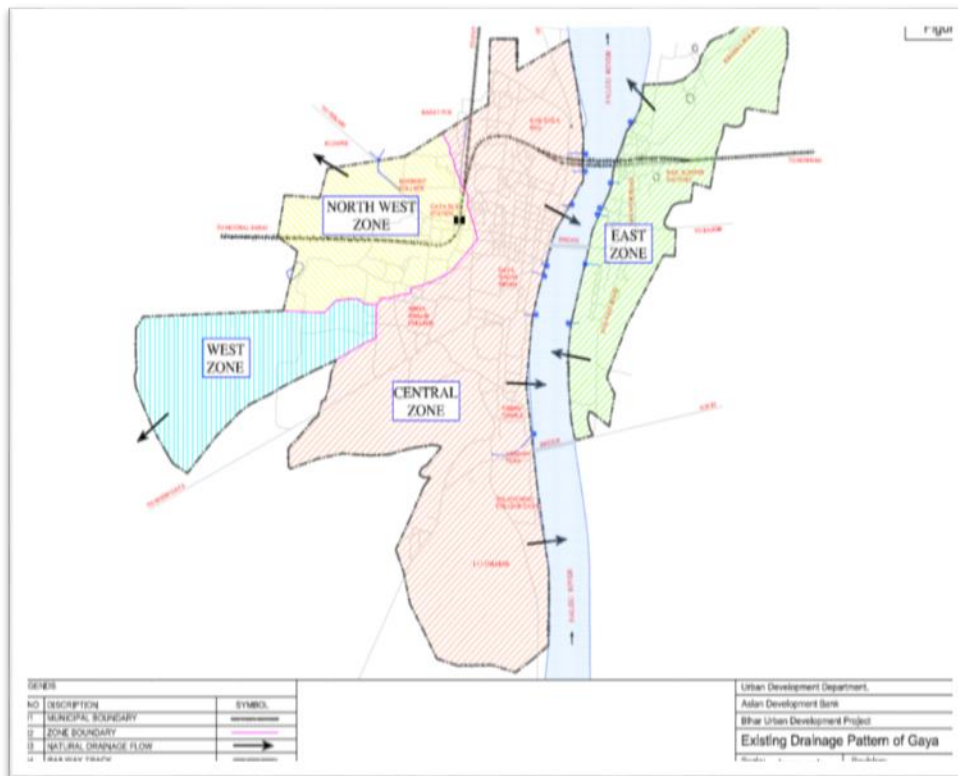

**Figure 11: Existing Drainage map of Gaya**

100. **Natural Hazards.** Earthquake. Earthquake hazard map of India (**Figure 12**) and Bihar shows that Gaya district falls in Seismic Zone III, which is a moderate risk zone and an earthquake up to a magnitude of 7.0 on Richter scale has the potential to hit the area. Thus Gaya Municipal Area is an earthquake hazard prone area and falls in moderate damage risk zone.

101. **Wind hazard.** The wind hazards map of Bihar shows that Gaya districts falls in moderate damage risk zone with cyclonic wind velocities around 39 m/s. Thus Gaya Municipal Area is a moderate wind hazard prone area.

102. **Floods.** The flood hazard map of Bihar shows that Gaya district is not susceptible to any major flooding. It is evident that Gaya city located in Gaya district is susceptible to natural hazards with moderate risk or probability of occurrence of a moderate intensity earthquake and wind. A map (**Figure 13**) showing flood zone in Bihar is shown below. It indicated that Gaya district does not come under flood zones.



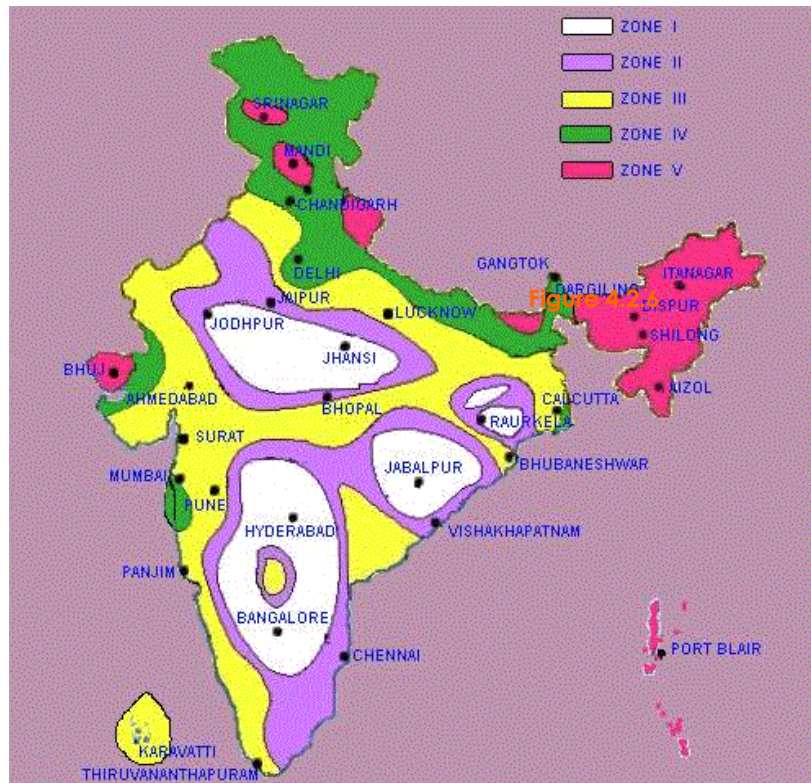


Figure 12: Earthquake zone map of India



Figure 13: Flood zone of Bihar

Source: State Environment Report, Bihar (2007)

### 3. Geology, Geomorphology and Soils

103. **Geology and Geomorphology.** The main geological formation of the region is of Quaternary age. The area is mostly covered by unconsolidated sediments which is known as Alluvial deposits followed by consolidated deposits of Satpura range. Few areas are also

characterized by units of Archaean ages. The Satpura range mainly exposed in Gaya hills and Rajgir hills comprises low grade supracrustals – Schists, ferruginous phyllite, quartzites and phyllitic slate.

104. The Archeans are the oldest rock formation in the area. The most predominant rock type is gneisses and granites with basic intrusives and pegmatoides.

105. **Soils.** Gaya is covered with recent Alluvium of both old and recent. It consists of a thick alluvial mantle of drift origin. This wide alluvial plain is part of Gangetic depressions with alluvial deposits of immense depth, and is broken by groups of low ranges of hills or isolated peaks arising abruptly from the plains. Soils in the region are deep and excessively drained that are formed in eolian sands over lacustrine deposits derived from mixed rocks. Five main types of soils present in the region: sandy loam, loamy soil, sandy loam, black soil and red soil.

#### 4. Climate

106. The climate of Gaya is generally tropical and has three distinct seasons: winter season from November to middle of March, summer season from mid-March to mid-June and rainy season from mid-June to October. Winters are generally cold, summers are hot and dry, and the monsoon season is characterized by moist heat and oppressive nights. The cold weather commences early in November and temperatures (both day and night) decrease rapidly with the advance of the season. January is the coldest month. Temperature increases rapidly from middle of March till May. With the onset of monsoon in the month of June, the temperature starts decreasing. In the hot season Gaya is very unpleasant.

107. Rainfall in the region is mainly from southwestern monsoon during the period of June mid to early October. Rainfall also occurs due to northeast monsoon in January and February although its contribution is very limited. Monthly rainfall pattern is tabulated in **Table 13**. Annual rainfall during this period fluctuated between as low as 683 millimeter (mm) to 1260 mm. Monthly rainfall shows that about 90 percent of annual rainfall is received during the monsoon period of June to October.

**Table 13: Monthly Rainfall Pattern (2008-2014) in mm**

Month	2008	2009	2010	2011	2012	2013	2014
January	95.4	8.4	0.2	6.0	19.9	0.0	20
February	13.4	0.0	3.4	3.0	4.4	10.7	20
March	0.6	0.4	0.0	0.1	10.8	0.9	13
April	13.3	2.4	0.0	32.9	21.2	32.1	8
May	40.3	73.7	25.8	18.2	25	91.8	20
June	404.9	68.4	97.8	393.3	109.6	47.8	137
July	283.5	194.8	202.7	133.2	236	80.3	315
August	209.6	152.5	202.9	419.8	392.6	168.3	328
September	48.9	269	50.3	244.7	134.2	127.1	206
October	0.0	17	91.0	8.5	66.9	158.5	53
November	0.0	11.8	6.4	0.0	34.3	0.0	10
December	0.0	2.3	2.8	0.0	0.0	0.0	3
<b>Total</b>	<b>1109.9</b>	<b>800.7</b>	<b>683.3</b>	<b>1259.7</b>	<b>1054.9</b>	<b>717.5</b>	<b>1133</b>

Source-India Meteorological Department

108. Maximum and minimum temperatures during summers are: 43°C and 21°C and during winters: 20°C and 6°C. Normally lowest temperature is recorded in the month of January while the highest is in the month of May/June. During the summer the humidity is much lower (about 30-40 percent) due to the hot and dry westerly winds. With the onset of



monsoon humidity increases and it is generally in the range of 80 to 84 percent in July and August. Predominantly winds blow from east and west. Westerly winds usually prevail from the beginning of January to the end of March. Then onwards till middle of June the east and west winds are nearly balanced. From middle of June to end of July winds are predominantly easterly. From end of July to the end of August westerly winds prevail. Then onwards till the end of October east winds prevail. In November and December east and west winds are nearly balanced.

109. Earlier there was no fixed monitoring air quality stations at Gaya, which was also not subject to monitoring by the Bihar State Pollution Control Board (BSPCB) as there are no major industries. Gaya is located in the transition zone between the fertile alluvial plains and hills of Chhotanagpur Plateau, and generally dry weather prevails. During summers it experiences very dry and hot weather. Traffic is the only significant air pollution source, so levels of oxides of sulphur and nitrogen are likely to be well within the National Ambient Air Quality Standards (NAAQS). Due to dry weather, poor road conditions and traffic particulate matter is likely to be high, particularly during summers. In the year 2014 ambient air quality monitoring has been conducted at Gaya. Monitoring station is located at Gaya Collectorate office corner. Month wise result is given in the **Table 14**. Result shows that at all the months concentration PM<sub>10</sub> is above the standard. Except few months concentration of NO<sub>2</sub> was above the national standard.

**Table 14: Recent ambient Air Quality of Gaya city**

Status of Ambient Air Quality of Gaya – Collectorate office											
S. No	Year 2014	Main Pollutants & BTX Parameters 2014 (µg/m <sup>3</sup> )									
		CO	SO <sub>2</sub>	NO	NO <sub>2</sub>	NOx	O <sub>3</sub>	PM <sub>10</sub>	Benzene	Toluene	Xylene
		Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg	Avg
1	March	1.56	6.9	25.4	93.8	119.2	17.7	239.5	3.05	11.4	7.8
2	April	2.99	6.6	34.2	113.4	147.6	34.9	270.5	2.76	11.3	4.82
3	May	2.61	6.1	16	51.5	67.5	46.8	198.2	1.98	7.7	3.08
4	June	3.00	5.7	12.1	58.3	70.4	42.2	165.9	1.94	7.3	2.82
5	July	1.77	5.2	15.8	40.5	56.4	18	83.9	1.78	8.1	3.55
6	Aug	1.38		16.9	33.4	50.2	16.9	73.5	1.57	6.1	2.81
7	Sept	2.45		16.5	25.5	42	10.2	75.9	1.51	6.3	3.23
8	Oct	3.84		24.9	25.5	50.4	12.4	196.8	1.89	7.5	4.38
9	Nov	4.63		53.2	49.8	103	15.1	324.2	2.7	9.8	6.8
<b>Standard – Annual average</b>		<b>2000</b>	<b>50</b>	<b>-</b>	<b>40.0</b>	<b>-</b>	<b>100</b>	<b>60.0</b>	<b>5.0</b>	<b>-</b>	<b>-</b>

Source-Bihar State Pollution Control Board (BSPCB) 2015, BTX: Benzene Toluene Xylene

## 5. Ambient noise levels

110. The Bihar State Pollution Control Board (BSPCB) measures the noise level across the Gaya city during 2004-05. Data shows that day time noise levels are high at all locations, exceeding the ambient noise standards. Concentrations of parameters are always higher than WHO standard.

111. Presently primary noise level data is generated on September 2015 from the BUDIP project. Result presented in the following **Table 15**, the noise levels at silence, residential

and commercial zones exceeding the standards, attributed mainly to the vehicular traffic. Noise level values are above the WHO standard.

**Table 15: Noise Levels in Gaya city**

Location	Noise Level (day time)	Noise Zone	Standard (day time)
	<i>dB(A) Leq</i>		<i>dB(A) Leq</i>
Panchayati Akhara	82.2	Residential	55
Panchayati Akhara-Tutwari Road	81.5	Residential	55
Near Ramshila	90.0	Commercial	65
Azad Park Near Temple	87.5	Commercial	65
Tikari road	85.4	Commercial	65
GhantaGhar	95.0	Commercial	65
Rammana road	94.0	Commercial	65
GB road	93.8	Commercial	65
SP road	87.7	commercial	65
DM office	90.5	commercial	65
Jai Prakash Narayan Hospital	87.6	silence	50
Prabhat hospital	70.9	silence	50
Zila shool gate	99.5	silence	50
Brabmayoni hill	84.5	silence	50
Near manglagauri	84.6	silence	50
Dandibagh	85.0	silence	50

(BUDIP generated data, September 2015)

112. On comparison of noise quality data with the limits specified for different types of the areas in the ambient noise quality standards {under schedule to the Noise Pollution (Regulation and Control) Rules, 2000 of Government of India} it is evident that the noise values at most of the sites are higher than the permissible standards. This may be attributed to the commercial activities and traffic movement coupled with frequent traffic jams and honking of horns in the subproject area.

## 6. Water Resources


### a. Surface Water

113. Gaya city is situated along the banks of River Phalgu. This river is formed by the merger of two streams of Nilanjan and Mohana about 5 km south of Gaya city, and flows south to north through the heart of Gaya District. The width of river in Gaya is about 900 m. The famous Vishnupad Temple is located on the banks of the River and there are a number of ghats (bathing and worshipping) developed for the pilgrims. This river is a tributary of River Punpun, which joins River Ganga near Patna.



**Figure 14: Gaya and Phalgu River, seen from Ramshila Hill**

114. In the scope of hydro-geological investigations carried out by BUDIP in early 2014, the flow regime of the Phalgu River has been studied. At Gaya city the river has a catchment area of about 3058 km<sup>2</sup>, mainly in the hills in Jharkhand, south of Bihar. See the map in **Figure 15**. Average annual runoff was estimated at 1030 million m<sup>3</sup>. Runoff with a 90% dependability (reliability) was estimated at 417 million m<sup>3</sup> per year.

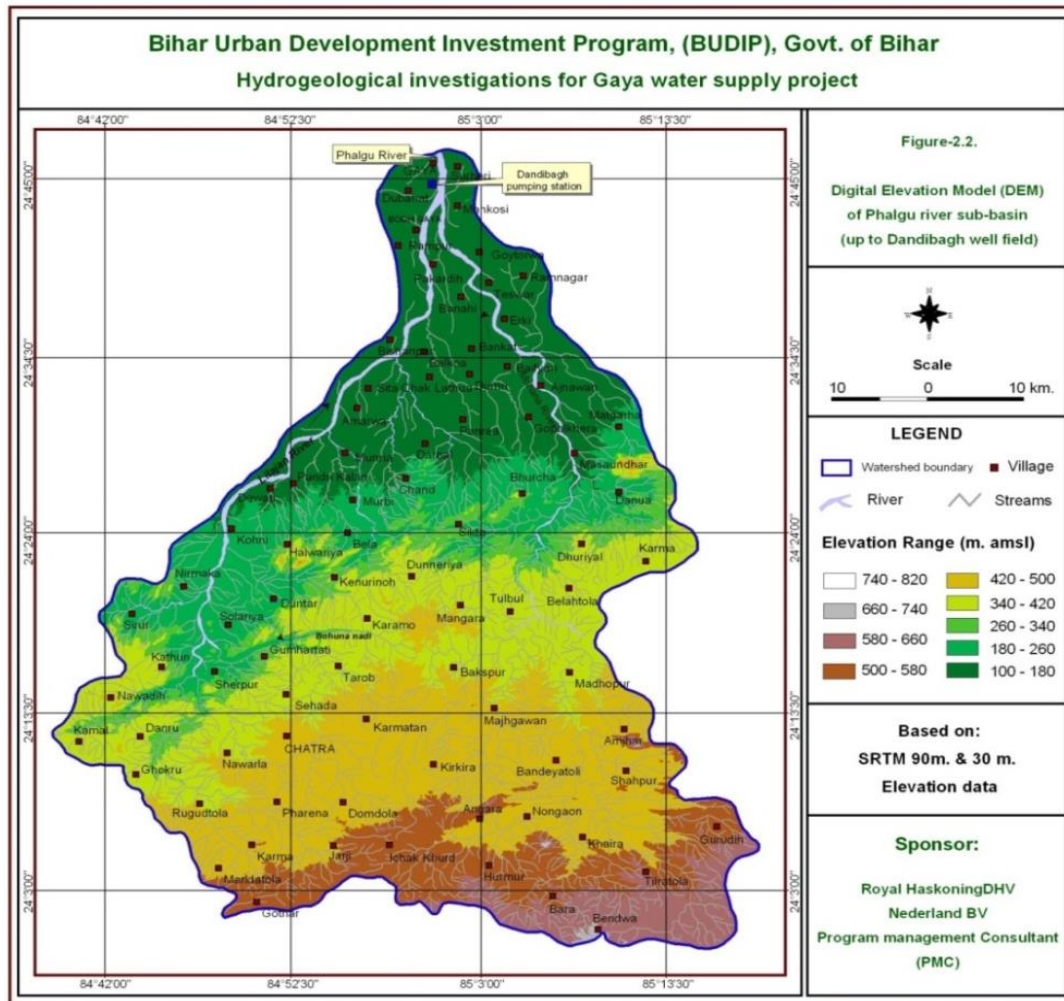

**Figure 15: Hydrological investigation map**

115. Phalgu is a seasonal river, and flows only during monsoon and partly in post monsoon (mid-June to November/December). During the rains, river carries very high flows but in the other seasons the flow is limited to a shallow, meandering channel of a few tens of meters wide. In February 2014, well into the dry season, a flow of 2.5m<sup>3</sup>/s or 200 MLD was measured. The investigations in 2014 suggest that, in an average year, there is a period of no-flow in the river of 2.5 months. This may extend to 4 months in a dry year.



**Photo: Phalgu River in February 2014**

116. Due to a good monsoon season in 2006, the river over flowed its banks and flooded the nearby localities. However, this was not severe and no damage to human lives or property is reported.

117. It is observed that due to lack of sewerage system in the City, the waste water is discharged into the storm water drainage system, which ultimately joins and pollutes River Phalgu.

#### **b. Geohydrology and Groundwater**


118. Gaya is located in the transition region between the uplands of Chhotanagpur Plateau and Gangetic plains of South Bihar extending from Patna. The extensive and deep aquifer of the Bihar Plains starts from Nepal Border in the north, where depth is said to be about 2,000m and which gradually decreases southwards to around 650 m in Patna and becomes shallower further south to about 60 m in Gaya District. In Gaya City, the aquifer thickness is still shallower. The plain around Gaya generally consists of 20 to 30m thick alluvial material underlain by hard rock.

119. The aquifer under the Phalgu River has much more potential. Existing production tube wells at Dandibagh, constructed on the edge of the river, have yields of 100 to over 200 m<sup>3</sup>/h. Earlier reports already indicated the high potential of the Phalgu bed upstream of the town and it was decided that the necessary investigations be carried out by BUDIP. If the investigations were to provide positive results, than a design alternative, i.e. using the Ganges River as water source and transporting the water over 100km to Gaya, would not be required.

120. The aquifer, about the width of the river (900m) and some 20 to 30m deep, consists of recent, coarse alluvial deposits such as sand and gravel intermixed with clayey material. The aquifer has therefore a favorable permeability and water bearing capacity. It is regularly replenished by surface water flowing in the river directly above.

121. **Sustainable water source - water availability.** The hydro-geological investigations carried out by Hydro-Geo-survey Consultants Pvt. Ltd., Jodhpur, to examine the suitability of groundwater of Gaya in the bed of the Phalgu River, up stream of Gaya city, as water source for the city's water supply system. The field investigations took place in February 2014 and the final report was submitted in July 2014.

122. The study area extended over the catchment area of the Phalgu River upstream of Gaya city (see **Figure 15** above) to identify the most promising geological formations. The relatively poor water yielding capacity of the plains was confirmed. The study then focused in on the bed of the Phalgu River. Pumping tests on existing production tube wells were carried out to determine key aquifer characteristics. For example, permeability (K-value) of 150 to 230 m/day were found, indicative of very coarse aquifer material and potentially high yields per well. Also, geo-electric resistivity surveys were carried out over a 4km long river stretch upstream of Dandibagh to locate zones in the aquifer with the most conducive constitution. **Figure 16** shows a tri-dimensional composition of the results of the resistivity soundings.

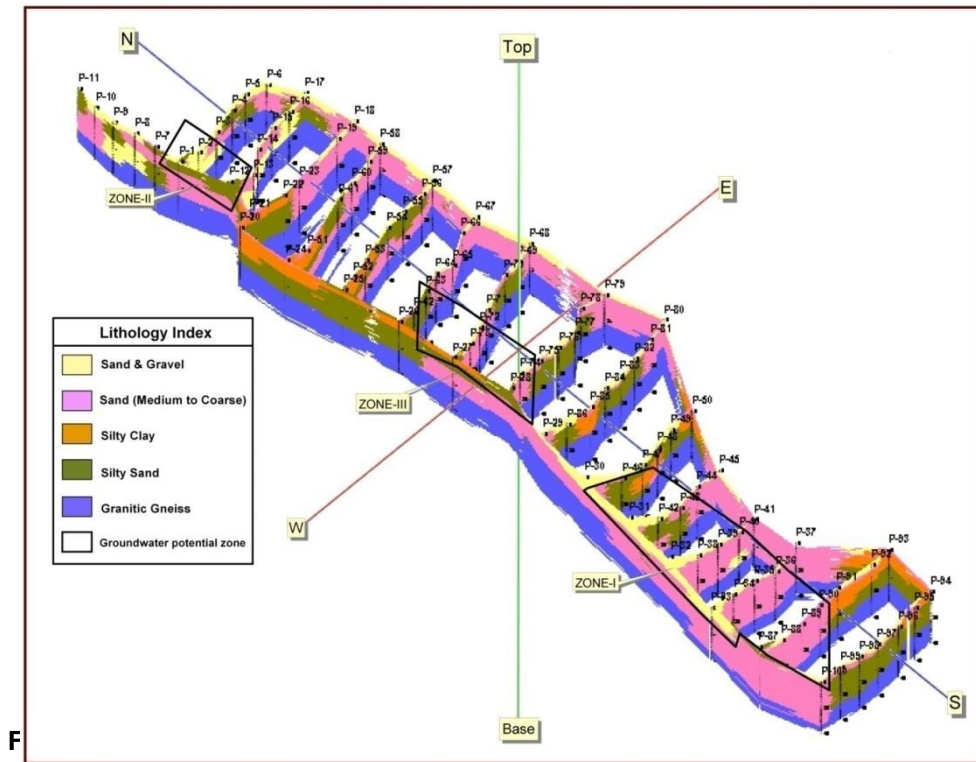

Phalgu river bed at Gaya towns upstream of Dandiabagn

123. The report has been reviewed by the Central Ground Water Board (CGWB) who complemented the team on the quality of the report. Minutes of a meeting with CGWB are attached as **Appendix 5**. The outcome of the investigations is positive. Water sustainability study summary discussed in Appendix section C of Chapter 2 and appended as **Appendix 2**.

124. **Groundwater Quality:** Although groundwater is used for domestic water supply, no regular water quality monitoring is conducted. However, some historic data from PHED is available. In addition the project has carried out several water quality analysis campaigns. The results are presented below. A distinction is made between the quality of groundwater in the Bihar plains surrounding Gaya city, the same aquifer underlying the city and the special aquifer of the Phalgu River bed.

125. **Groundwater quality, Bihar Plain.** As far as chemical contents in ground water are concerned, Gaya district is one of the nine fluorides affected districts. A report shows that fluoride level upto 6.8 ppm has been detected against the permissible limit of 1.5 ppm in the ground water of Nawada District, a neighbor district of Gaya. However Gaya district is not covered within 16 arsenic affected districts in Bihar. **Figure 17** shows the Fluoride map of Bihar and Gaya.






## FLUORIDE CONTAMINATION IN BIHAR


Fluoride contaminated aquifers in dry areas of following Districts of Bihar is confirmed:-

- Gaya
- Nawada
- Rohtas
- Katihar
- Munger
- Bhagalpur
- Jehanabad
- Aurangabad
- Jamui

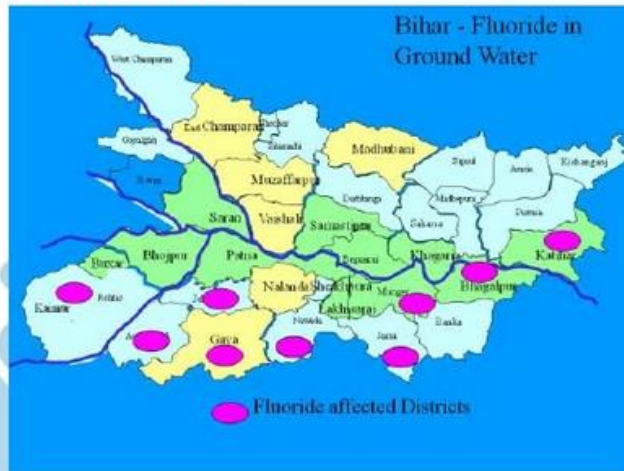

www.ancollege.org

Source: India Water Portal

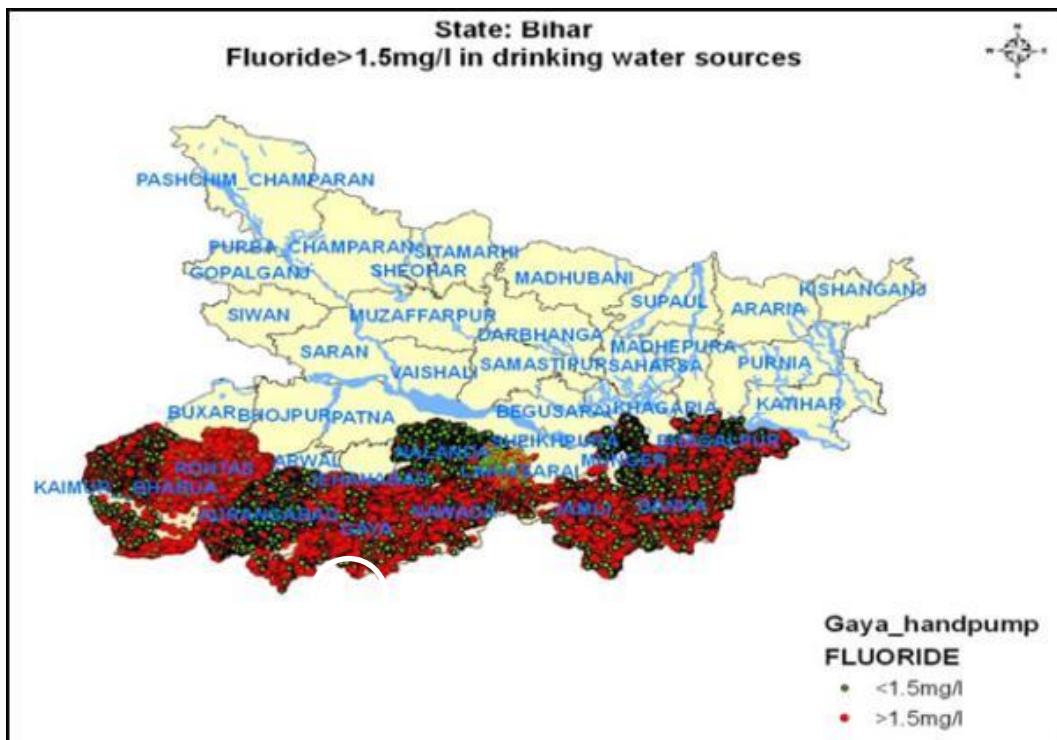

Source: PHED, Govt. of Bihar

Figure 17: Fluoride enriched area of Bihar

126. The presence of fluoride is indeed confirmed by analysis carried out for BUDIP (Hydro-geological Investigations, 2014) but none of the samples is above the acceptable limit of 1.0 mg/l. The data are reproduced in **Appendix 6**

127. **Groundwater quality, under Gaya City.** Examination of the water quality of (production tube wells) tapping the aquifer underlying the city is of relevance to assess the performance of the existing tube wells and whether it is recommendable to further rely on these wells.

128. For the preparation of the DPR for GWSP1, water samples of a selected number of production tube wells were analyzed. General conclusion was that the water of wells underlying the Gaya city was safe for drinking. Further data was collected from PHED who sampled a number of wells in June 2012. It showed some excess in turbidity and Fe above permissible levels in one occasion.

**Table 16: Physico- chemical analyses data of Gaya supply water**

S. N.	Location Details	Physico - Chemical and Bacteriological Parameters														
		pH	Turbidity (NTU)	EC	Total Dissolved Solids (mg/l)	Total Hardness (mg/l)	Ca (mg/l)	Mg (mg/l)	Cl (mg/l)	Alkalinity (mg/l)	Fe (mg/l)	NO <sub>3</sub> (mg/l)	SO <sub>4</sub> (mg/l)	F (mg/l)	As (mg/l)	Total Coliform (no/100 ml)
1	P/W Supply Scheme Dandibag	7.7	4.0	190	123	84	25.65	4.86	22.72	40.0	0.17	0.36	0.29	0.43	BDL	ND
2	P/W Supply Scheme AP Colony-1	7.9	7.0	170	110	84	27.25	3.88	19.88	20.0	0.25	0.76	0.09	0.53	BDL	ND
3	P/W Supply Scheme AP Colony-2	8.0	5.0	160	104	88	17.63	10.7	56.80	140	<b>0.79</b>	0.95	0.19	0.14	BDL	ND
Desirable limit*		<b>6.5-8.5</b>	<b>1</b>	-	<b>500</b>	<b>200</b>	<b>75</b>	<b>30</b>	<b>250</b>	<b>200</b>	<b>0.3</b>	<b>45</b>	<b>200</b>	<b>1</b>	<b>0.01</b>	-
Permissible limit* in absence of alternate source		<b>NR</b>	<b>5</b>	-	<b>2000</b>	<b>600</b>	<b>200</b>	<b>100</b>	<b>1000</b>	<b>600</b>	<b>NR</b>	<b>NR</b>	<b>400</b>	<b>1.5</b>	<b>0.05</b>	<b>**</b>

(Source: Physico - Chemical and Bacteriological Parameters (Report no. PHE/Patna DW-26359-6361/R/Gay/12-13, dated 2/06/2012.)

Note: \*(1) Drinking Water Specification IS: 10500- 2012

(2) BDL = Below Detection Limit,

(3) Testing Methods are taken by APHA 20th Edition.

(4) NR = No Relaxation, ND= Not detected

\*\* (a) Throughout any year, 95% of the samples should not contain coliform organisms in 100ml,

(b) No sample should contain more than 10 coliform organisms per 100ml,

(c) Coliform organisms should not be detected in 100ml of any two consecutive samples.

129. A third set of data is also available from PHED and dates from March 2014. Testing results are shown in **Table 16**. The production tube wells at Azad Park and Delha tap the aquifer under the city. Especially Delha scores badly with values above acceptable levels in 6 counts. Although use of the water for drinking is permissible, it indicates the type of contamination mostly due to local discharge of household wastewater and unlined drain near water source. Only after treatment at source and storage water can be supply for the public.

130. Positive bacteria count in the Panchayatiya Akhara tube well is noted. It makes it unfit for drinking. The well is not tapping the larger aquifer under the city but is located in the Phalgu River bed. In this program (BUDIP) Sewage Treatment Plant will be constructed for

Gaya city. Raw effluent will be treated before discharge into Phalgu river and tube well water will be protected from contamination.

**Table 17: Physico-chemical and Biological test report**

S. No	Parameters	In Phalgu bed			In aquifer under city		Indian Standards IS: 10,500-2012 Acceptable/ Permissible level
		Dandibagh Pump-1	Panchayatiya Akhara	Manpur	Azad Park	Delha	
1	PH	7.84	7.03	7.64	8.07	7.40	6.5-8.5
2	Turbidity (NTU)	1	2	3	1	1	1/5
3	Conductivity (( $\mu$ S/cm)	379	650	650	925	2350	-
4	TDS (mg/l)	249	<b>1000</b>	<b>1000</b>	<b>1400</b>	<b>1525</b>	500/2000
5	Total Hardness(mg/l)	140	168	200	<b>244</b>	<b>544</b>	200/600
6	Calcium(mg/l)	40.08	70.04	59.20	<b>84.8</b>	<b>188.8</b>	75/200
7	Magnesium (mg/l)	9.72	25.34	21.31	<b>30.52</b>	<b>67.96</b>	30/100
8	Chloride(mg/l)	36.87	140	124	184	<b>472</b>	250/1000
9	Alkalinity(mg/l)	<b>220</b>	<b>220</b>	<b>216</b>	<b>321</b>	<b>448</b>	200/600
10	Iron(mg/l)	0.09	0.10	0.10	0.10	0.10	0.3/0.3
11	Nitrate(mg/l)	37	25	25	25	25	45/45
12	Sulphate(mg/l)	8.75	10	10	25	75	200/400
13	Fluoride(mg/l)	0.25	0.59	0.36	0.40	0.66	1/1.5
14	Bacteria(+,-)	<5.1	Positive(not safe for drinking)	Negative	Negative	Negative	Not detectable in any 100 ml sample

Source-Public Health Engineering Department-PHD Testing Lab-Gaya, 20-03-2014

Bold value – above the acceptable –desirable limit


131. **Groundwater quality, aquifer in Phalgu River bed.** This aquifer is of most interest because it is proposed to be used as source for the water supply scheme under GWSP2. The aquifer is unconfined and sensitive to potential contamination. Recharge of the aquifer is from the surface water in the Phalgu River and any contaminants in the river will percolate down into the aquifer. The sample taken from Panchayatiya Akhara in March 2014 (see **Table 17**) showed bacterial pollution and this is likely to originate from wastewater discharging from the town into the river upstream of the well. The secondary data on water quality of wells at Dandibagh, just upstream of the city, show values within acceptable levels (see tables **16 and 17**). At Gaya construction of STP will be taken up shortly through ADB funding and accordingly untreated water will be not discharge into Phalgu river. That will protect ground water quality in future.

132. As part of the hydrogeological investigations of 2014, carried out by the project, water of 10 wells throughout the study area were sampled and analyzed. The results are presented in **Appendix 6**. The wells include both hand-pumped wells and production tube wells. The hand-pumped wells are located in the larger aquifer around and under the city, the production wells tap their water from or near to the Phalgu bed. Panchayatiya Akhara was not sampled. All parameters tested were within acceptable limits.

133. The sensitivity of the aquifer to pollution was further examined in June 2015 by



carrying out sampling and analysis on both production tube wells (at Dandibagh and Panchayatiya Akhara) and on potential upstream sources of pollution. The latter included groundwater under agricultural fields and wastewater. The locations of the sampling points are indicated in **Figure 18**. The purpose was to examine any correlation. The results and its interpretation are presented in **Appendix 7**.

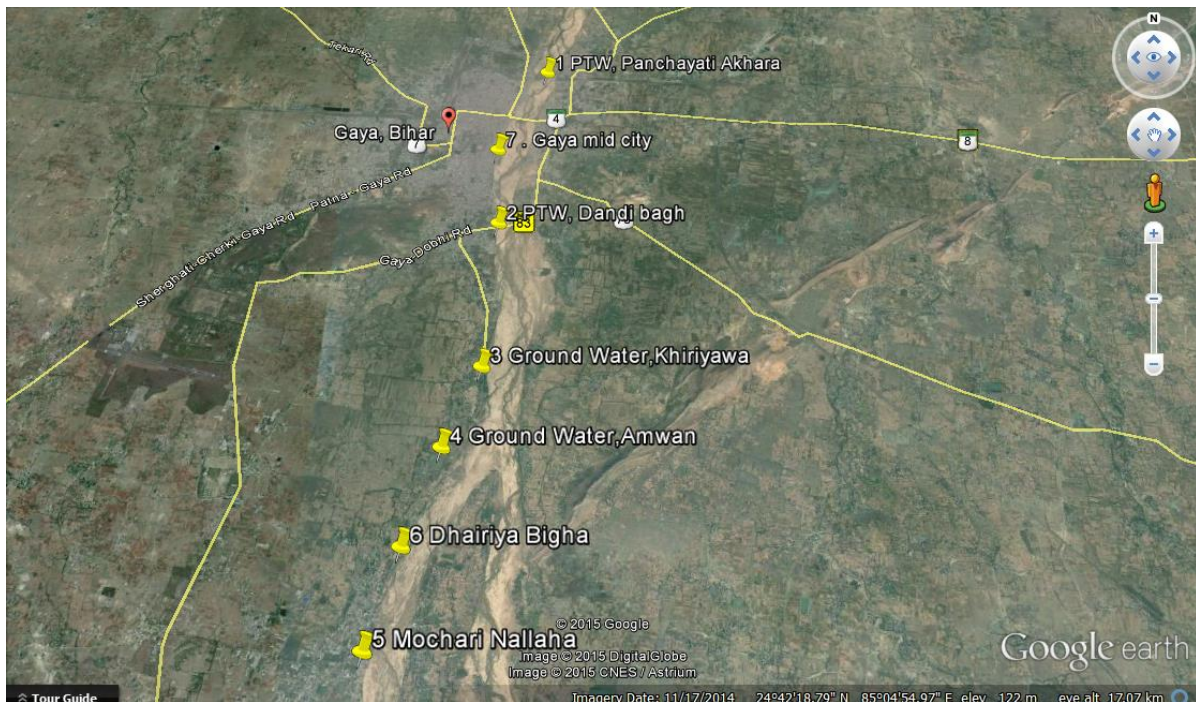


**Figure 18: Location of sampling points for water analysis, June 2015**

134. *Agriculture.* Land upstream of Gaya is used for agriculture. To examine potential harm from, especially, the use of pesticides samples were taken from two hand-pumped wells in the agricultural area (points 3 and 4) and tested on a wide range of pesticides. The results were negative (no residues detected) and it is concluded that the potential impact is negligible. Also, no traces were detected in the two production tube wells downstream.


135. *Wastewater.* The nearest potential source of pollution by wastewater for the Dandibagh well field is the town of Bodhgaya, a town of 30,000 people some 8 km upstream. At Bodhgaya samples were taken from two sources (points 5 and 6): a major urban drain and from the Phalgu River just downstream of the town, and tested on a wide range of parameters indicative for domestic wastewater. These samples were compared with the water quality at Dandibagh for which the same parameters were analyzed. **Figure 19** shows the trends in reduction of concentrations for some selected parameters.

136. The study concludes that water from the production tube well at Dandibagh is safe for drinking. Although waste discharges originating from Bodhgaya town do show appreciable contamination, the concentrations of the relevant parameters show a substantial decrease in the well sample. This suggests a purifying effect of the bed of the Phalgu River, both by dilution and by absorption / reduction.

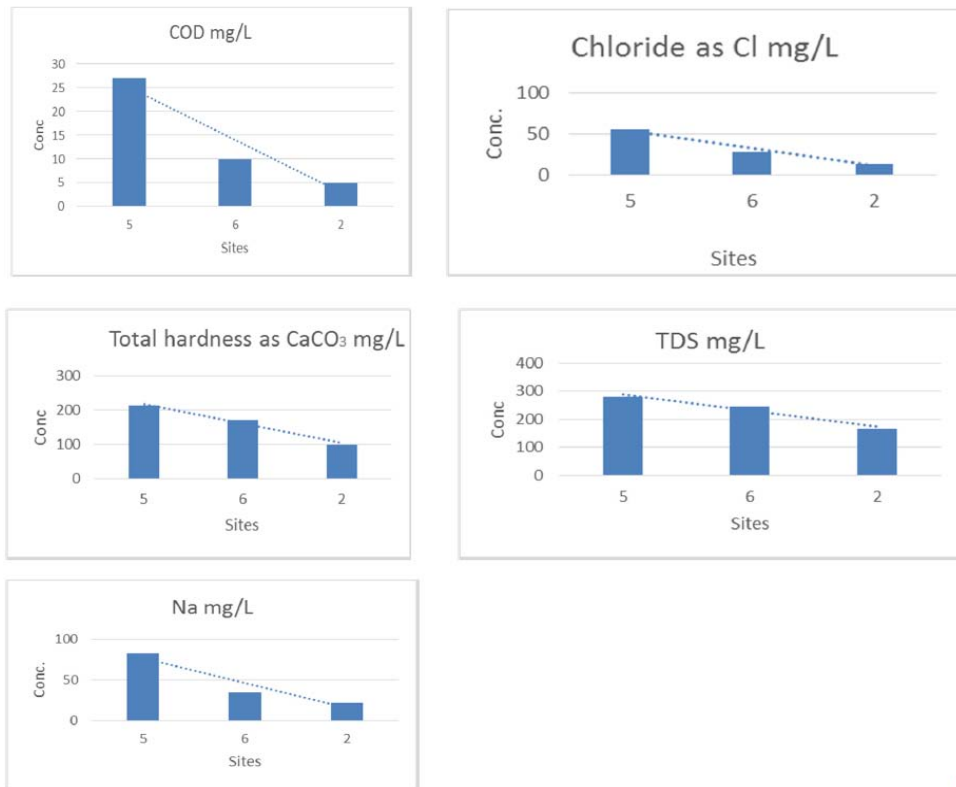

**Figure 19: Correlation between pollution by waste water parameters, Bodhgaya town (points 5 & 6) and Dandibagh well (point 2).**

137. The same exercise was done to correlate wastewater discharge from a large urban drain in Gaya (point 7) with the production tube well at Panchayatiya Akhara. **Figure 20** shows the results. Contamination of the well at Panchayati Akhara is more pronounced than at Dandibagh. This correlates with the relatively large discharges of wastes from the adjacent urban area. Although all relevant parameters at the well are still within acceptable limits, the threat from the town's waste is apparent. The study concludes that, to protect the aquifer in the bed of the Phalgu River from further pollution, it is required to collect and treat the city's wastes in the town area that drains directly into the Phalgu. Since the well is proposed to be rehabilitated under GWSP1, its water quality shall be monitored vigorously.

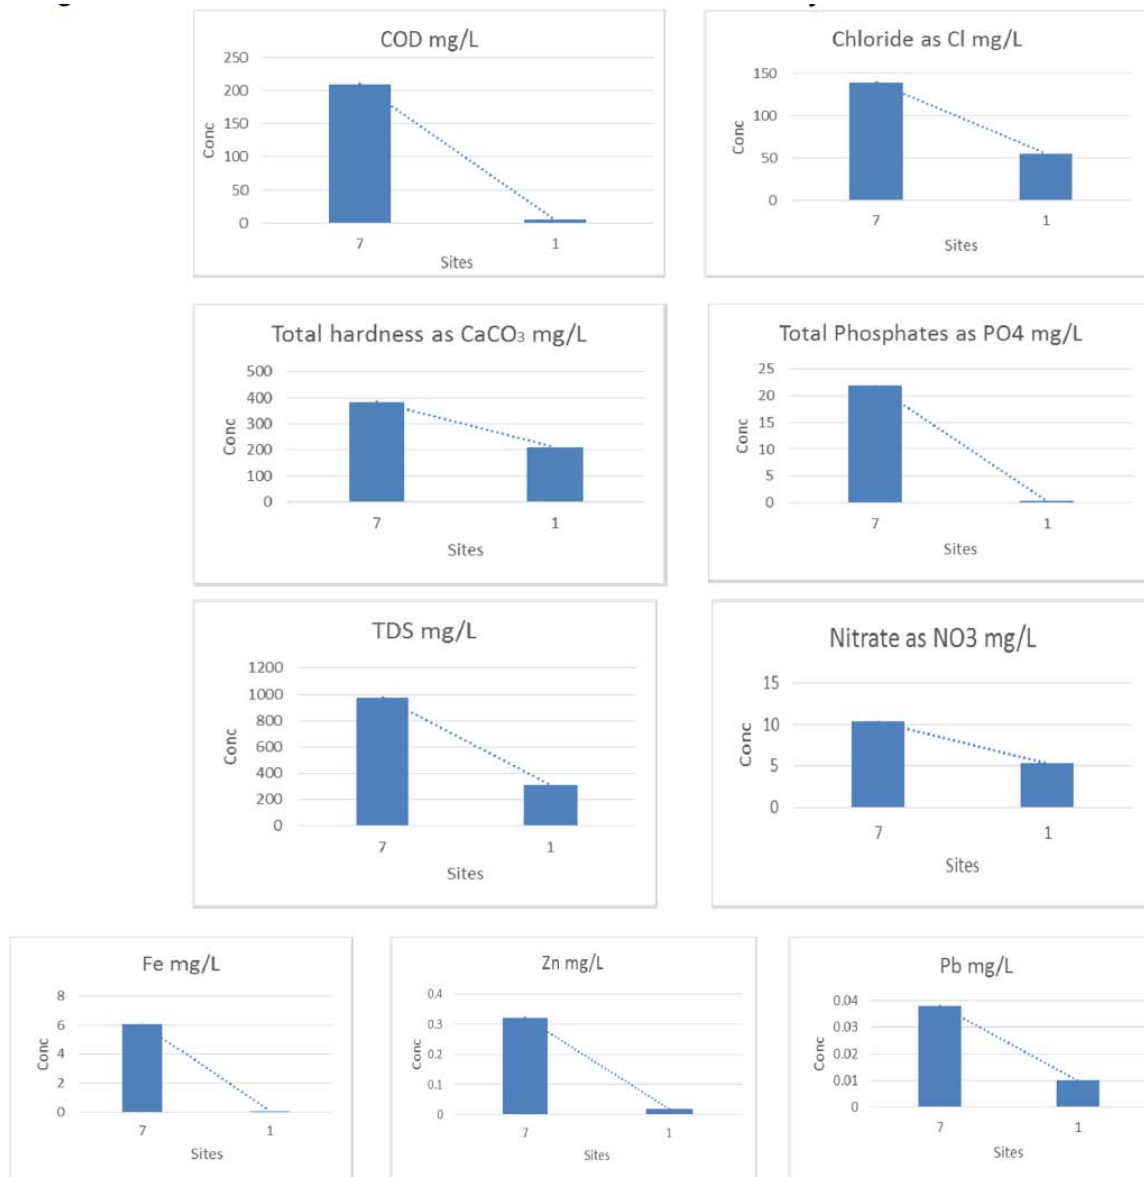


**Figure 20: Correlation between pollution by wastewater parameters, Gaya city (point 7) and Panchayati Akhara well (point 1)**

138. To further examine the resilience of the Phalgu aquifer against potential contamination, a desk study was carried out. At Bodhgaya a sewage treatment plant (STP) has recently been constructed which is located just upstream of the designated well fields proposed under GWSP2. Effluent from the STP will be discharged into the river where it will be diluted (depending on the flow in the river) and then percolate into the aquifer. In the desk study retention times inside the aquifer (the time required for the [diluted] effluent to reach the well screens) were estimated and the behavior of indicative parameters examined. There is a reduction in concentration as a result of dilution, adsorption or chemical processes depending on the type of parameter. **The study, which is appended as Appendix 8, concludes that the concentrations of all parameters examined will reduce sufficiently to keep the wells safe for drinking water.** A scenario where the STP is by-passed and sewage is discharged untreated has not been examined.

## B. Ecological Resources

139. Forest cover map of Bihar is shown below. Total Forest coverage of the state is 7.27% out of the state geographical coverage. As per 2011 assessment Gaya district have forest (medium and open) coverage of 12.66%.

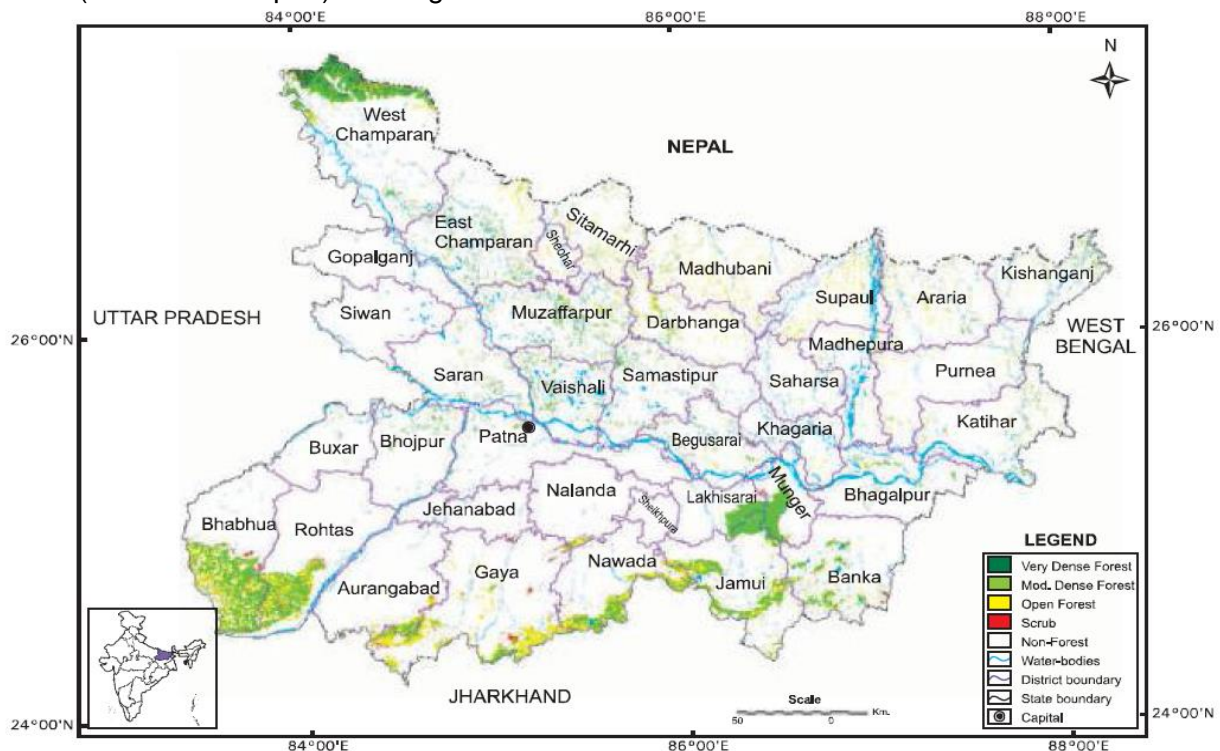

Source : India state of Forest Report 2011

**Figure 21: Forest Map of Bihar**

140. Gaya city was developed along the western banks of the River Phalgu, in the transition between fertile Gangetic alluvial plains extending from Patna, and Chhotanagapur Plateau. Lands surrounding the city, especially on the northern side, are cultivated extensively. With the growing population, the city is grown to the present size occupying the surrounding land that was under agricultural use. There is no natural habitat in the city, and the flora is limited to artificially planted trees and shrubs, and the fauna comprises domesticated animals (cows, goats, pigs and chickens), plus other species able to live close to man (urban birds, rodents and some insects).

141. There is no wildlife sanctuary, national park or sensitive environmental areas in or near the city. Nearest protected area is Gautam Budha Wildlife Sanctuary located at a distance of 50 km south of Gaya. The area of the Sanctuary is about 259 sq. km and is predominantly a hilly terrain and undulating tract which is an extension of Chhotanagapur plateau. Among the wild Life found in sanctuary are Tigers, Leopards, Hyenas, Sloth Bear, Wolf, Wild Dog, Wild Boar, Sambhar, Spotted Deer, and Nilgai etc.

142. No wild animals are reported in and around the subproject corridor as the same are located mostly in the city area.

143. Rare or Endangered Species: No rare or endangered animal or plant species are reported in the subproject impact zone.

144. Proposed water storage reservoir at Singraathan is located within state forest.

Acquisition of forest land will be required for construction of the same. For construction of CWR at ITI Polytechnic 1 tree needs to be cut, while at Dandibagh proposed operator office land though 15 trees are located within entire land but selection of building location will be done through judicial engineering design to save all trees. Permission of tree felling will be obtained from concerned authority as per prevalent rules and regulations.

### C. Economic Development

145. Gaya has a large number of household industries like production of *agarbattis*, production of *tilkut* and *lai*, power looms and hand looms. Gaya functions as a service centre for the surrounding towns and villages. Commercial activities are located along the important roads of the city. The main vegetable market in the city is the Kedarnath Market. In addition the city has a large number of informal shops. On account of Gaya being an important centre for religious tourism, the city has a large number of affordable accommodations.

146. **Land use Pattern.** The existing land-use distribution of Gaya Municipal Area based on the primary survey is tabulated in Table below.

**Table 18: Existing Land Use of Gaya Municipal Area**

Land Use Categories	Area in Ha		Area in Percentage
Residential		1170	23.4
Commercial		36	0.64
Industrial		59	1.17
Public Semi Public		27	2.53
Transportation		164	3.27
Parks/Open spaces (including Orchards)		108	2.15
<b>Sub Total</b>		1664	33.2
Area undeveloped/ natural features	Agricultural & Vacant Land	2699	53.79
	Water bodies (including river)	356	7.1
	Hills	298	5.93
<b>Sub Total</b>		3353	66.8
<b>Total Area under Gaya Municipal Corporation</b>		<b>5017</b>	<b>100</b>

Source: Gaya Master Plan vision 2027

147. The land use in the project corridor comprises of built up areas consist of residential complexes, government/private offices and buildings, educational institutes, religious places and commercial establishments such as shops, hotels, restaurants, etc. The transportation area constitutes of existing roads in the subproject area.

148. **Commercial Activities.** The subproject area is located within Gaya city and the predominant activities in the impact zone are of mixed type including, residential, commercial and institutional houses.

149. Commercial activity will be impacted due to the implementation of the subproject components for laying of rising mains. The new mains will be laid within the available right of way (ROW) of existing road (in shoulders). It has been found through the transect walks along with a team of water supply design engineers that on an average available ROW including the dedicated pedestrian walkway in selected category of roads in Gaya city. The



improvement work will be carried out within the ROW in road shoulders. The maximum required width for laying down of different categories of pipeline will be 1.2 m. However, at certain junctions there may be some temporary impacts which may disrupt some business activities in terms of temporary impact on the access. The exact nature of temporary impacts will be known at the time of drawing up of the construction schedule of the contractor which will be documented and mitigated at the time of construction<sup>1</sup> as per the entitlement matrix of the resettlement plan and resettlement framework on case by case basis. To determine the extent of temporary impacts due to the laying of rising main pipelines within the city, transect walks were undertaken along the proposed networks with focus on the nature of the existing ROW, density of commercial and residential structure, etc.

150. The partial blocking of road will follow particularly in narrow stretch during the time string of action of excavation followed by laying of pipeline, testing of water supply, backfilling of excavated trenches and road restoration. The access to these shops, residences and institutions will be affected for a maximum of 1-2 days.

151. Potential temporary impacts of access disruption for all these shops/commercial establishments can be mitigated through good construction practices which will be the responsibility of construction contractors. Measures are identified in the IEE and include: (i) providing walkways and metal sheets to maintain access across trenches, (ii) increasing the workforce in front of shops/commercial establishments/ sensitive receptors so as to reduce the period of impact, (iii) consulting business and institutions regarding operating hours and factoring this in work schedules, (iv) providing advance information on works to be undertaken including appropriate signages etc. The project contractor will ensure that there is provision of alternate access during the construction so that there is no closure of these shops or any loss of clientage. Moreover, as per the contract provisions, the contractor will be required to put back the road to its original condition after the pipe laying.

152. In case, the loss of access to the shops during construction is not effectively mitigated by provision of alternate access by project contractors same may cause temporary loss of income during the construction for which provision for livelihood allowances have been made in the resettlement plan. There could be temporary disruption of business during working days for which affected persons will be provided assistance for this transitional period on a case-to-case basis as per the provisions of the Entitlement Matrix in agreed resettlement framework. A lump sum budgetary provision has been kept in the Resettlement plan for same. The payment of assistance will be made for days of closure, and will be subject to the production of requisite documents in support of the claim. Cash assistance will be released after proper verification of documents<sup>2</sup>.

153. A detailed Resettlement Plan has been prepared for rehabilitation and resettlement of parties affected by execution of proposed subproject.

154. **Industrial Development.** There is no major industrial development in and around

---

<sup>1</sup> The excavation of trenches for primary lines will last for a maximum of 1 to 2 days. The construction will be scheduled in such a way as to minimize disruption.

<sup>2</sup>Income certificate or income tax return certificate or any other document proving their income from affected commercial establishment

Gaya in general. Small scale industries like production of *agarbattis*, production of *tilkut* and *lai*, power looms and hand looms are common. There are few agro-based industries in the city. Tourism is a most important economic activity in the city.

155. **Agriculture.** State is predominantly an agriculture based economy with fertile lands. Gaya region is also rich in agricultural produce, crops like rice, wheat, maize, jowar and other pulses are cultivated here.

156. **Infrastructure Facilities.** Since, the subproject is spread over portions of Gaya City; the infrastructure facilities like schools, hospitals, colleges, electricity and communication in the subproject area are satisfactory.

157. During execution of the proposed subproject, there will be no impact on the main building of any department/ facility, therefore no impact on any educational, administrative or medical service is anticipated.


158. **Water supply.** Piped water supply system in Gaya was introduced in 1924, with Phalgu River as a source. Later on in 1954-55, due to inadequate flow in the river during summers and to cope with the growing water demand, a groundwater based source at Dandibag on the bank of River Phalgu was developed. The water supply system was expanded to different parts of the City from time to time. The present water system is based on groundwater, and an estimated 27.6 MLD or less of water is supplied every day at the rate of 40 liters per capita per day (LPCD), much less than the stipulated norm of 135 LPCD. Water distribution system consists of 150 km with 50-600 mm Dia. pipeline Due to old system leakages are frequent, and the system losses are as high as 40% of the water supply. About 60% of population have access to water supply and remaining population depends on in house own tube wells and hand pumps provided by the GMC and PHED. Improvement of the water supply services in Gaya is subject of GWSP1 and GWSP2 and is elaborated in Chapter 2 of this report.

159. **Sewerage and Drainage System.** Gaya has no separate sewerage system to carry the wastewater. Existing drainage system was developed in 1930's and is a combined system to carry both wastewater and storm runoff. This drainage system covers 80% of the City area, and consists of open and as well as underground drains: of the 80 km length, 65 km drains are open drains and remaining 15 km are underground closed drains. There is no defined drainage system in southwestern and southern parts of the City. Due to lack of sewerage system, about 75% of the households depend on individual septic tanks or other on-site facilities and remaining 25% depend either on public toilets or resort to open defecation. Effluent from the septic tanks joins the drainage system. Owing to the topography, the drainage system is gravity based, and drains mostly into Phalgu River. Since there is no treatment facility, wastewater is directly discharged into the river without any treatment. Now it is planned to construct STP under ADB funding. After completion of project waste water of Gaya will be discharge after treatment at STP.

160. The drainage of Gaya is influenced by the hills surrounding it on three sides – Mangla Gauri, Shringa Sthan, Ramshila and Brahmayoni – and the River Phalgu on the remaining side. The road to the west of the Collectorate divides the drainage into two zones – western and eastern. Gaya's drainage network is 60 km long – covering 40% of the road network – with 46 km of the drains being pucca and 16km kutcha. The main drains in the

western zone include Kujapi, Karimganj and Katari Hill Road *Nallah* and these discharge effluents at various places like the Gandhi Maidan, near the Railway Station etc. The main drains in the eastern zone include Mansarva, Mashanghat and Nadraganj *Nallah* and these discharge effluents into the River Falgu. The area to the north of Dhobi Road *Nallah* to Katari Hill Road Nala, Gandhi Maidan to Kujapi *Nallah* and newly developed colonies in Manpur, Ghughari, Monapur, and Kumar Colony have no drainage and are prone to water logging.

161. **Solid Waste.** Gaya generates about 250 tons of municipal solid waste per day. The GMC collects about 60 percent of the waste generated through its solid waste management system. At present there is no door-to-door collection system. The waste collected through community dustbins (about 100 in Nos.) is transported to the disposal sites using tractors and open dumper trucks. Street littering is prevalent, and solid waste is mostly deposited on the side of the roads and vacant lands. At present no specific MSW disposal site exists in the City. Part of the solid waste collected is dumped along the roadsides at Gagri Tand area, 7 km from the City. Remaining waste is dumped in vacant plots, along the roads, drains and low-lying lands in and around the City.

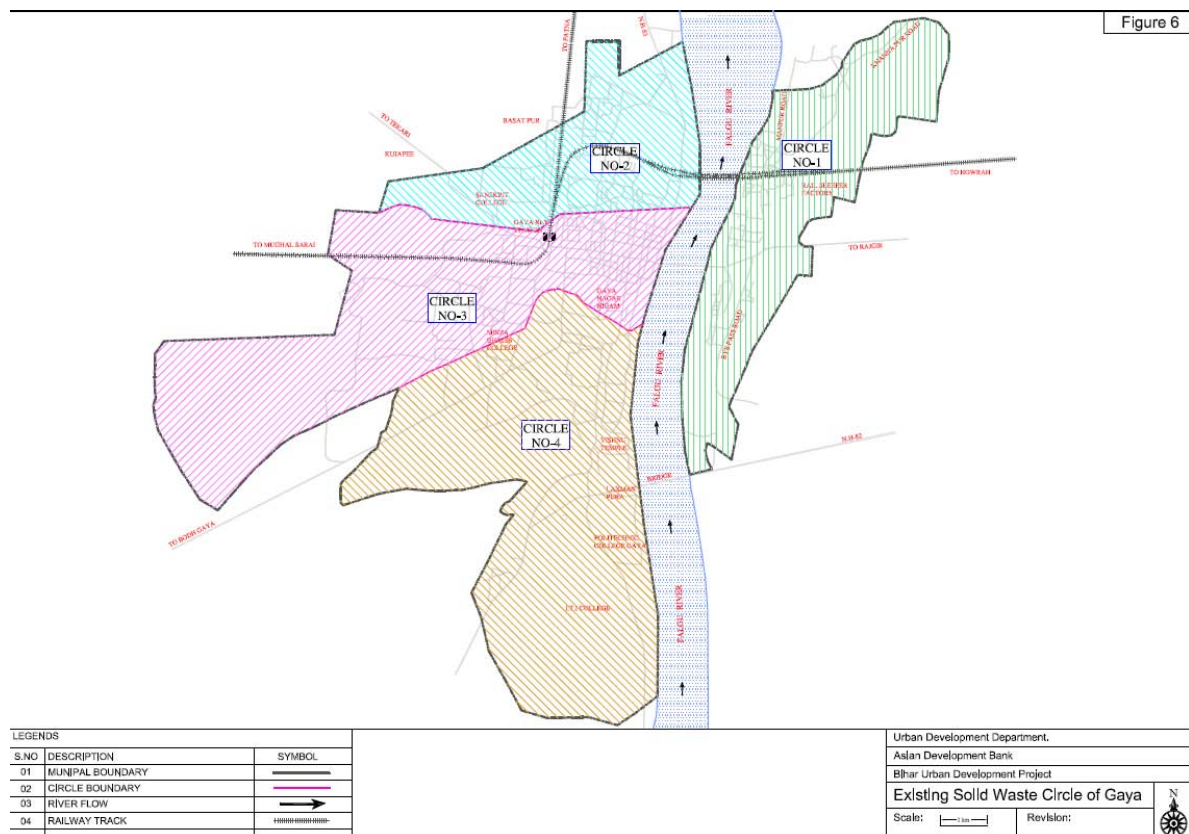

**Figure 22: Present Solid waste circle at Gaya**

162. Currently SW/ garbage is dumped at various open spaces both along the river line as well as on other places under the GMC area. There was no significant dumping of Solid Waste in the upstream of Falgu River beyond Kendui. The Executive Officer, Bodh Gaya Nagar Panchayat informed that a Solid waste Management system has been put in place and the task had been out sourced to Ecosmart Waste Management Private Limited. The waste is collected from various collection points to be dumped at Naili, a site earmarked for



the development of a controlled landfill. However, interaction with local community members at Azad Bigha, Naily revealed that tractors carrying the garbage don't come regularly and dumping of SW at Naily has been stopped.

163. **Transportation.** Gaya is well connected by road, rail and air. Two National Highways pass through the City: NH-83 running north-south connects Gaya to Patna in the north and Dobhi in the south; and NH-82 running east-west connects Gaya to Bihar Shariff and Mokama in the east and Dudnagar in the west. A bypass runs on the southern side of the City, connecting NH-82 and NH-83. There are three State Highways (SH) passing through Gaya. Gaya is well connected by railways. Main railway line connecting Kolkata in the east and Delhi and the west passes through the City. Gaya also has an airport. Gaya has a well developed internal road network. The total length of roads in Gaya is 105km, of which 67% are municipal roads and remaining are State and National Highways. Most of the roads in the City are narrow, congested and carries traffic exceeding its capacity. The average road width is 5.5m which is further reduced to 3.5m due to encroachments. There is no organized public transport system. There is heavy dependence on para-transit facilities: auto and cycle rickshaws and *tongas* (horse-drawn vehicles).

164. **Power Supply.** Thermal power is the main source of energy in Bihar, contribution of hydro power is negligible. State-owned Bihar State Electricity Board is responsible for power generation, transmission and distribution of electricity. Power is supplied from the central grid by overhead cables carried on metal and concrete poles, mainly located in public areas alongside roads. The power supply is erratic and there are frequent outages in warmer months, and large fluctuations in voltage


#### **D. Social and Cultural Resources**

165. **Demography.** Based on 2011 census, Gaya City population was 463,454, up from 291,675 in 1991, registering a decadal growth of around 33%. Average population density is 10,963 persons/sq. km. Sex ratio (females per 1000 males) was 886 which is lower than the State and the national average of 919 and 929 respectively. Overall literacy rate is reported at 85.74% with 90.49 % for males and 80.35 % for females (the corresponding State figures are 63.82%, 73.39% and 53.33 % respectively). Overall work participation rate (WPR) in the City is 24.5 %, reported at 39.8% for males and 7.3% for females. Occupational pattern shows that 82.6% of the persons are engaged in industrial and service sector (organized and unorganized, excluding the workers engaged in household industry and agriculture). Around 7.2 % workers are engaged in agricultural activities and the rest 10.2% in household industries.. Majority of the people are Hindus and the remainder are mainly Muslims. Other religious communities like Sikhs, Christians, Jains and Buddhists also found in the City but in few numbers. Main languages spoken in the City are Hindi, Magahi (dialect), Bhojpuri and Urdu. Among the total population 9.6% comprise scheduled castes (SC) population; around 0.2% of population belong to Scheduled Tribes (ST) category - but these are all part of the mainstream population. Demographic status as per 2011 census is shown in Table below.

**Table 19: Demographic status of Gaya city**

Gaya City	Total	Male	Female
Population	<b>463,454</b>	245,764	217,690
Literates	<b>346,747</b>	194,377	152,370
Children (0-6)	<b>59,015</b>	30,966	28,049
Average Literacy (%)	<b>85.74</b>	90.49	80.35
Sex ratio	<b>886</b>		
Child Sex ratio	<b>906</b>		

Source: Census 2011

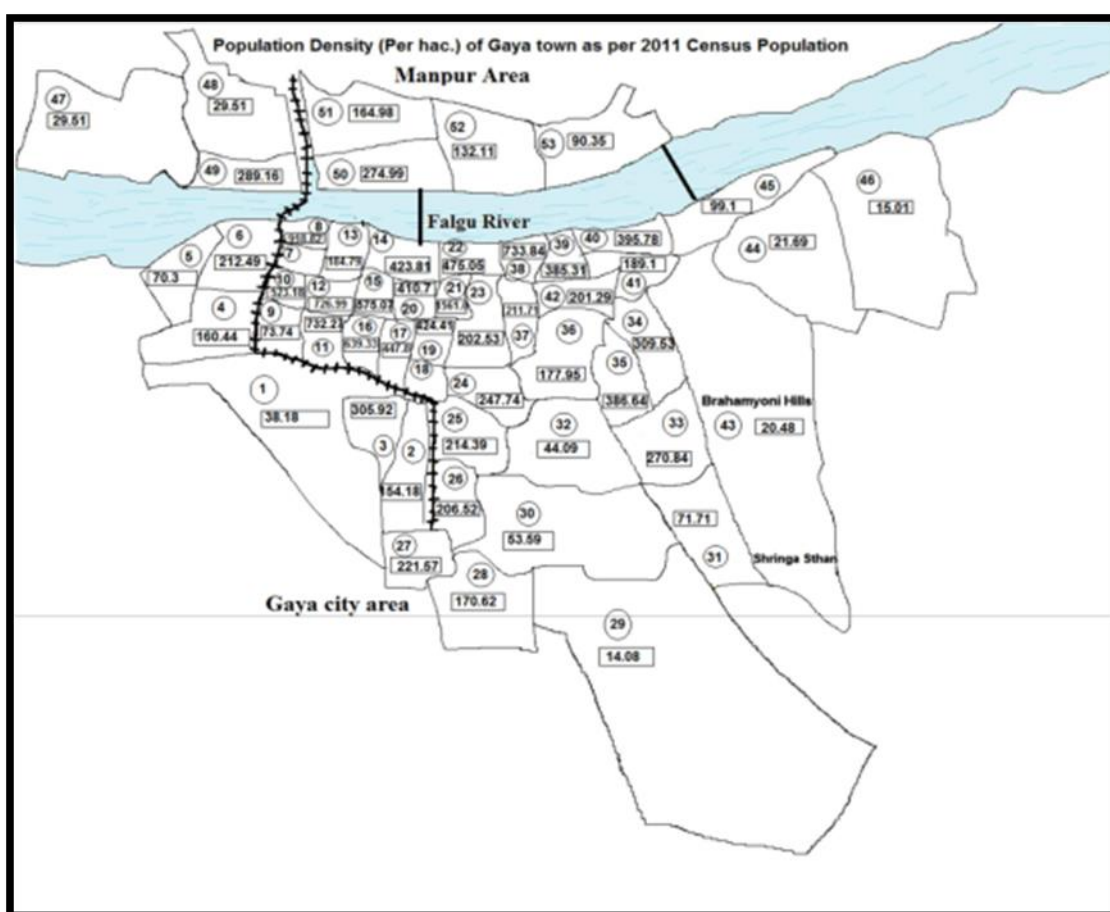

**Figure 23: Ward wise population density at Gaya**

166. **Educational and Health Facilities.** *Education:* There are at present about 117 primary schools, 52 middle schools, 15 inter schools and 3 district level schools in the city. The availability of basic educational institutions appears to be fairly adequate at the city level as the average population served is well within the norms for the same. The Magadh University established in 1962, is located at Bodhgaya, which is comfortably accessible from Gaya. Gaya has several colleges, the well known ones include Gaya College, Anugrah Memorial College, Jagjivan College, Mirza Ghalib College, and Gautam Buddha Mahila College for women. Anugraha Narayan Magadh Medical College and Hospital (ANMMCH)

located here is a renowned institution in the field. There are also few private engineering colleges in the city. Gaya also has an Industrial Training Institute for vocational education located on Bodhgaya. Thus, in respect of educational facilities, the availability of basic facilities appears fairly adequate though, spatial distribution has not uniformly facilitated their accessibility.

167. *Health.* At present there are six major hospitals, which caters to the patients from the entire region. In addition to these, there are a number of allopathic, ayurvedic and homeopathic and other dispensaries and private nursing homes of various specializations in Gaya. Thus, in terms of quantitative requirement, the availability of medical facilities appears to be quite adequate as of now, while the accessibility is not uniform, in view of the location of these facilities only in selected areas.

168. *History, Culture, and Tourism.* Gaya, located in Mahadh Region, is a historic and a most important religious centre for Hindus. The world famous Buddhist centre of Bodh Gaya is located 13 km south of Gaya. The history of Gaya has a unique place in the evolution and development of Hindu civilization. According to the religion of Puranaas, it is incumbent on every Hindu to visit Gaya and make offerings for the souls of his ancestors. Gaya is believed to be the one of the oldest existing cities in the World, and it presents a nucleus of several religions(Hinduism, Bhidhism, Jainism etc) and its effects.

169. *History:* Magadh history goes back to Sisunaga Dynasty (600 BC); however, it was during the time of Bimbisara (545 BC), the Magadh Region and the Gaya came into prominence. During his reign Gautama Buddha came to Gaya, and spent time in contemplation on a rocky crest, now known as Brahmayoni Hill (it is now a declared monument of the State Government) before he passed on to Bodh Gaya. After Bimbisara, his son Ajatasatru became the King. Ajatasatru was succeeded by Udayi, and then the Nanda Dynasty took over the Magadga Region. Thereafter, Magadh Region came under the rule of the famous Maurya Dynasty. Mauryan King Ashoka (272 BC – 232 BC) embraced Buddhism; he visited Gaya and built the first temple at Bodh Gaya to commemorate Prince Gautama's attainment of supreme enlightenment. Gaya came under the reign of Muhamaddan rulers in the 12th century with Muhammad Bakhtiyar Khilji invading the region. The region came into British Rule after the battle of Buxar in 1764.

170. *Places of importance and Tourism.* Gaya City is divided into two parts: the old City of Gaya popularly known as Andar Gaya, and the new City of Sahebganj. Andar Gaya is one of the most ancient inhabited areas. The main attractions of this old City are the sacred shrines, which attract Hindu pilgrims from all over the world. Vishnupada temple is main temple in and around Gaya. **Table 20** presents a list of monuments/sites declared as protected by the Government of Bihar. People mainly visit Gaya for offering Pind Dan (oblations) for salvation of soul of ones ancestors. There are 360 Vedis (places where offerings are made) located within Pancha Kosi Gaya. Thousands of pilgrims visit Gaya throughout the Year. Pitrapaksha Mela (fair), organized for 15 days as per the Hindu calendar every year in Gaya is a very important Hindu festival. Few hundred thousands of people visit Gaya during this period. No project components are located within any ancient monuments and historical protected area.

**Table 20: Ancient Monuments, Historical and Tourism Places in Gaya**

S.No	Name	Features
1	Vishnupad Temple	This is the main temple in Gaya dedicated to Lord Vishnu. This is located along the Phalgu River, marked by a footprint of Vishnu and Buddha incised into a block of basalt. The present day temple was rebuilt by Devi Ahilya Bai Holkar, the ruler of Indore, in the 18 <sup>th</sup> century. There is a gold flag and couple of Kalash made of gold has been embedded at the top of the temple which use to always glitter
2	Brahmyoni Hill	It was at Brahmayoni hill that Buddha preached the Fire Sermon (Adittapariyaya Sutta) to one thousand former fire-worshipping ascetics, who all became enlightened while listening to this discourse. At that time, the hill was called Gayasisa.
3	Ramshila Hill	Ramshila Hill is situated 5 km from Vishnupad Temple. One of the most sacred hills, with considerable antiquity, the hill is dotted with numerous stone sculptors. It is closely associated with Lord Ram and takes its name after him.

Source: [http://asi.nic.in/asi\\_protected\\_monu\\_bihar.asp](http://asi.nic.in/asi_protected_monu_bihar.asp)

171. **Sensitive Environmental and Social Receptors.** The sensitive environmental receptors existing along the alignment of proposed sub-project include religious places, educational institutions, health care centres, community property resources, etc. The details of the existing sensitive environmental receptors near project sites are given in the **Appendix 9.**

172. The assessment is done for understanding possibility of impact on sensitive receptors. It is noted from the Table in the appendix that few religious places, health centers and schools are located within or near the ROW. All the sensitive environmental receptors existing along the subproject sites shall be properly supervised during the subproject execution stage so as to avoid and minimise any negative impact. As such, these sites may face the minor impacts of temporary disruption of access and increased air and noise pollution during execution of the proposed subproject.

#### **IV. ANTICIPATED IMPACTS AND MITIGATION MEASURES**

173. This section of the IEE reviews possible subproject-related impacts, in order to identify issues requiring further attention and screen out issues of no relevance. ADB SPS (2009) require that impacts and risks will be analyzed during pre-construction, construction, and operational stages in the context of the subproject's area of influence. As defined previously, the primary impact areas are (i) the sustainability of the water source, sites for tube wells, water storage reservoir, transmission mains; (ii) main routes/intersections which will be traversed by construction vehicles; and (iii) quarries and borrow pits as sources of construction materials. The secondary impact areas are: (i) entire Gaya city outside of the delineated primary impact area; and (ii) entire Gaya district in terms of overall environmental improvement.

174. **Methodology.** Issues for consideration have been raised by the following means: (i) input from interested and affected parties; (ii) desktop research of information relevant to the proposed subproject; (iii) site visit and professional assessment by environment specialist engaged by the implementing agency; and (iv) evaluation of proposed design

scope and potential impacts based on the environment specialist's past experience.

175. Categorization of the subproject has been undertaken using ADB's REA Checklist for Water Supply. REA checklist is attached as **Appendix 1**.

176. In the case of this subproject (i) except for the issue of water source sustainability, most of the individual elements are relatively small and involve straightforward construction and operation, so impacts will be mainly localized and not greatly significant; (ii) most of the predicted impacts are associated with the construction process, and are produced because that process is invasive, involving excavation and earth movements; and (iii) being located in the built-up area of Gaya city, will not cause direct impact on biodiversity values. The subproject will be in properties held by the local government and access to the subproject locations is thru public rights-of-way and existing roads hence, land acquisition and encroachment on private property will not occur.

#### **A. Pre Construction- Planning and Design Phase**

177. Planning principles and design considerations have been reviewed and incorporated into the site planning process whenever possible. The concepts considered in design of the proposed water supply subproject are: (i) water source sustainability; (ii) no involuntary land acquisition; (iii) substantial reduction of water losses in sub-project area; (iv) augmentation in adequacy of drinking water supply at the user end; (v) enhancing the efficiency of existing tube wells; (vi) providing adequate infrastructure facilities for storage and distribution of water in deficient areas; (vii) most suitable construction methodology; and (viii) site constraints.

178. Transmission route alignment is planned after minimizing environmental impact. **Appendix 9** shows possible impact and mitigation for planning of transmission route.

179. **Water Source Sustainability.** The subproject proposes to use a sensitive source of water, the aquifer underlying the Phalgu River. Extensive investigations have been carried out by the project to derive planning and design parameters for sustainable development of the water source. This concerns both water availability (quantity) and water quality.

180. **Water quantity.** As discussed under Chapter 2 section C, that present ground water abstraction of 24,000 m<sup>3</sup>/day for 75 days (when the river Phalgu is dry) is hardly 31.50 % of the total sub-surface water storage (5.70 mcm) within 2 m of aquifer in 14.25 km<sup>2</sup> of the ground water potential zone during summer months. Similarly, with the ground water abstraction of 124 MLD for 75 days of 9.30 mcm from the sub-surface water storage of 25 m thick aquifer of 53.43 mcm will be 17.40 % and it will lower the water level by 4.35 m, still keeping the aquifer thickness of 20.65 m which is considered as sufficient to sustain the yield of tube wells.

181. The impact of pumping 124 MLD during the summer months (75 days) can be further reduced if the well fields are increased instead of having only one well field of Dandibagh. Two more well fields can be developed, one near village Kendui and another near Kendua on the left bank and fourth near Manpur - Buniyadgunj on the right bank. By having four different well fields, there will be less pumping from a small area of a well field, thereby creating a small ground water depression and less lowering of water level around it.

182. Study concluded that despite lowering of water level by 4.35 m during summer months, the tube wells will sustain the yield and will restore original yield as soon as Phalgu

river starts flowing after getting the first spell of rainfall in mid -June. Detail study report annexed as **Appendix 2**.

183. **Water Quality.** The investigations carried out by the project indicate that the aquifer is quite resilient against possible impacts from pollution by wastewater. The water quality of the aquifer upstream of Gaya city is well within allowable limits. However, water quality adjacent and downstream of the city is under threat, witnessed by the poor quality of the water at the Panchayati Akhara wells. The designer has proposed new wells at three locations downstream of Panchayati Akhara, of which those at Dharamshala is less than a kilometer away.

184. It was decided that under the same program (BUDIP) construction of Sewage Treatment Plant (STP) will be taken up and city's waste water will be treated before discharge into the Phalgu river. As a consequence it is expected that in future ground water resources will be protected from contamination.

185. **Design Period:** Different components of the proposed subproject are designed with design periods as under:

- (i) The design period for distribution network is 30 years.
- (ii) The design period for pumps and electrical equipment is 15 years.
- (iii) The design period for civil works is 30 years.
- (iv) The design capacity for storage system is 30 Years (135 lpcd +15% for transmission losses).

186. **Basis of design.** Design population and coverage of the project is given below:

**Table 21: Design basis of the Subproject**

Design feature	Description
Base Year (2018) population	524,297
Mid-Design Year (2033) population	675,237
Design Year (2048) population	848,200
Coverage	53 municipal wards of GMC
Project area	50.17 km <sup>2</sup>

Source: DPR Gaya Water supply

187. **Utilities.** Telephone lines and wires, water lines within the proposed subproject locations may require to be shifted in few cases. The mitigate the adverse impacts due to relocation of the utilities, DSC will (i) identify and include locations and operators of these utilities in the detailed design documents to prevent unnecessary disruption of services during construction phase; and (ii) require construction contractors to prepare a contingency plan to include actions to be done in case of unintentional interruption of services.

188. **Social and Cultural Resources.** Gaya is an area of large numbers of temples (some of them are historic) and other religious sites, so there is a risk that any work involving ground disturbance can uncover and damage archaeological and historical remains. For this subproject (construction of water storage reservoirs and laying of pipeline), excavation will occur in open area, so it could be that there is a medium risk of such impacts. Nevertheless, DSC/PMU/PMC will:

- (i) Consult GMC to obtain an expert assessment of the archaeological potential of the site;

- (ii) Consider alternatives if the site is found to be of high risk;
- (iii) Include state and local archaeological, cultural and historical authorities, and interest groups in consultation forums as project stakeholders so that their expertise can be made available; and
- (iv) Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.

189. **Site selection of construction work camps, stockpile areas, storage areas, and disposal areas.** Priority is to locate these near the subproject locations. However, if it is deemed necessary to locate elsewhere, sites to be considered will not promote instability and result in destruction of property, vegetation and drinking water supply systems. Thickly populated residential areas will not be considered for setting up camps to protect the human environment (i.e., to curb accident risks, health risks due to air and water pollution and dust, and noise, and to prevent social conflicts, shortages of amenities, and crime). Extreme care will be taken to avoid disposals near the forest, water bodies or in areas which will inconvenience the community. **Appendix 4** shows site management plan for water storage reservoir sites.

190. **Site selection for equipment lay-down and storage area.** Improper selection will affect local environment and inconvenience to public. Possible mitigation measures are,

- Choice of location for equipment lay-down and storage areas must take into account distances to adjacent land uses, general onsite topography and water erosion potential of the soil. Impervious surfaces must be provided where necessary.
- Storage areas shall be secure so as to minimize the risk of crime. They shall also be safe from access by children / animals etc.
- Residents living adjacent to the construction site must be notified of the existence of the hazardous storage area.
- Equipment lay-down and storage areas must be designated, demarcated and fenced if necessary.
- Fire prevention facilities must be present at all storage facilities.
- Proper storage facilities for the storage of oils, paints, grease, fuels, chemicals and any hazardous materials to be used must be provided to prevent the migration of spillage into the ground and groundwater regime around the temporary storage areas.
- These storage facilities (including any tanks) must be on an impermeable surface that is protected from the ingress of storm water from surrounding areas in order to ensure that accidental spillage does not pollute local soil or water resources.
- Fuel tanks must meet relevant specifications and be elevated so that leaks may be easily detected.

- Staff dealing with these materials / substances must be aware of their potential impacts and follow the appropriate safety measures.

191. **Site selection of sources of materials.** Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, ponding and water logging, and water pollution. To mitigate the potential environmental impacts, locations of quarry site/s and borrow pit/s (for loose material other than stones) would be included in the design specifications and on plan drawings. Mining Department approved sites would be selected first. If other sites are necessary, these would be located away from population centers, drinking water intakes and streams, cultivable lands, and natural drainage systems; and in structurally stable areas even if some distance from construction activities. It will be the construction contractor’s responsibility to verify the suitability of all material sources and to obtain the approval of Urban Local Body. If additional quarries will be required after construction is started, then the construction contractor shall use the mentioned criteria to select new quarry sites, with written approval of PIU/PMU/PMC.

192. **Maintaining Core Labour Standard.** The Contractor and PMU are responsible for ensuring that international CLS<sup>3</sup> –as reflected in national labour laws and regulations are adhered to. PMU is ultimately responsible for monitoring compliance with national labour laws and regulations, provided that these national laws are consistent with CLS. ADB will carry out due diligence – during loan review missions - to ensure that executing and implementing agencies and contractors comply with applicable (national) core labour standards and labour laws. PMU/PIU will ensure that bidding and contract documents include specific provisions requiring contractors to comply with all: (i) applicable labour laws and core labour standards on: (a) prohibition of child labour as defined in national legislation for construction and maintenance activities; (b) equal pay for equal work of equal value regardless of gender, ethnicity or caste; and (c) elimination of forced labour; and (ii) the requirement to disseminate information on sexually transmitted diseases including HIV/AIDS to employees and local communities surrounding the project sites. These will be monitored as part of the project’s safeguards reporting requirements.

## B. Construction Phase

193. **Table 22** presents an indication of what activities and facilities are likely to be undertaken during construction of the subproject, including the associated inputs and outputs.

**Table 22: Summary of Activities and Facilities, Resource Use, and Produced Outputs during Construction Phase**

Activities and Facilities	Inputs/Resource Use	Outputs/Waste Production
<ul style="list-style-type: none"> <li>• Construction camp and its associated facilities (including lay-down areas)</li> </ul>	<ul style="list-style-type: none"> <li>• Bitumen</li> <li>• Cement</li> </ul>	<ul style="list-style-type: none"> <li>• Old asphalt (removed from road carriageway during laying of pipelines)<sup>4</sup></li> </ul>

<sup>3</sup> Core Labor Standards (CLSs) are a set of four internationally recognized basic rights and principles at work: (i) freedom of association and the right to collective bargaining; (ii) elimination of all forms of forced or compulsory labor; (iii) effective abolition of child labor; and (iv) elimination of discrimination in respect of employment and occupation.

<sup>4</sup> The water supply improvement works affecting roads may involve the stripping and demolition of old asphalt layers. Ideally, old asphalt shall be reused during construction of the new road in order to avoid large quantities of



Activities and Facilities	Inputs/Resource Use	Outputs/Waste Production
<ul style="list-style-type: none"> <li>• Storage camps and lay-down areas               <ul style="list-style-type: none"> <li>– Materials and equipment stockpiles</li> <li>– Handling and storage of hazardous materials including chemicals additives, gravel, cement, concrete and lubricants</li> </ul> </li> <li>• Source of water</li> <li>• Vegetation clearance</li> <li>• Excavation</li> <li>• Drilling</li> <li>• Movement of construction staff, equipment and materials</li> <li>• Importation of selected materials for construction.</li> <li>• Temporary bypass</li> <li>• Noise and vibrations</li> <li>• Dust suppression</li> <li>• Waste production and temporary storage/disposal i.e. used fuels, waste concrete and bitumen, spoil materials and general waste</li> <li>• Use of bitumen/asphalt</li> <li>• Erosion prevention particularly at hill areas</li> <li>• Concrete batching plant (and associated storage and mixing areas, chemicals)</li> <li>• Rehabilitation of disturbed areas</li> <li>• Interaction between construction workforce and local communities</li> <li>• Management of the passing pedestrians and points of congestion</li> <li>• Implementation of the Resettlement Plan (as per R &amp; R policy) prior to start of construction</li> <li>• Reminders to affected people of construction with timeframes</li> </ul>	<ul style="list-style-type: none"> <li>• Chemical additives used in concrete</li> <li>• Aggregate (sand and stone)</li> <li>• Gravel (fill material and selected material for sub-base and base layers)</li> <li>• Water               <ul style="list-style-type: none"> <li>– Drinking, cooking and sanitation at construction camps</li> <li>– Water for dust suppression</li> <li>– Water applied to base and sub-base layers during compaction</li> <li>– Water for application to sub-base and base layers prior to compaction</li> </ul> </li> <li>• Petrochemicals</li> <li>• Other chemicals/lubricants/paints</li> <li>• Construction vehicles, machinery and equipment</li> <li>• Temporary energy supply to construction camps</li> <li>• Labour               <ul style="list-style-type: none"> <li>– Recruitment of construction workforce</li> <li>– Skills training</li> </ul> </li> <li>• Public movement control               <ul style="list-style-type: none"> <li>– need barriers (not just caution/danger tape) to protect people from trenches during construction</li> </ul> </li> </ul>	<ul style="list-style-type: none"> <li>• Waste concrete and other construction rubble</li> <li>• Waste bitumen<sup>5</sup></li> <li>• Used fuels, lubricants, solvents and other hazardous waste</li> <li>• General waste</li> <li>• Contaminated soil               <ul style="list-style-type: none"> <li>– Soil contaminated with bitumen</li> <li>– Soil contaminated with petrochemicals (i.e. oils and lubricants) and other chemicals</li> </ul> </li> <li>• Sewage and grey water (temporary construction camp sanitation)</li> <li>• Spoil material (excess soil removed during excavations for rehabilitation)</li> <li>• Noise and vibrations (construction vehicles and machinery operation)</li> <li>• Lighting at construction camps, equipment yards and lay-down areas</li> <li>• Smoke and fumes               <ul style="list-style-type: none"> <li>– Burning of vegetation cover</li> <li>– Fires used for cooking and space heating (construction camps)</li> <li>– Vehicle exhaust emissions</li> </ul> </li> <li>• Dust               <ul style="list-style-type: none"> <li>– Vehicle &amp; equipment movement</li> </ul> </li> </ul>

waste being produced. However, depending on the availability and cost of virgin aggregate in the area through which the road is aligned, reusing the old asphalt may be more costly than using virgin aggregate.

<sup>5</sup> Bitumen has relatively low levels of polycyclic aromatic hydrocarbons (PAHs) and is largely inert. However, certain other potentially hazardous chemical may be added to the bitumen or to the aggregate during the construction process in order to render the compound more workable. The objective is to use the least hazardous chemicals available and to locate asphalt plants, aggregate stockpiles and mixing areas where they do not pose a significant environmental risk.

## 1. Screening of No Significant Impacts

194. The construction work is expected not to cause major negative impacts, mainly because:

- (i) Most of the activities will be on the built-up areas of Gaya city thus could be constructed without causing impacts to biodiversity;
- (ii) All the sites are located on an government-owned land which is not occupied or used for any other purpose;
- (iii) Overall construction program will be relatively short and is expected to be completed in 18 months with activities to be conducted by small teams and specified location so most impacts will be localized and short in duration; and
- (iv) Most of the predicted impacts associated with the construction process are produced because the process is invasive, such as involving excavation for pipe laying and construction of reservoirs. However the routine nature of the impacts means that most can be easily mitigated and the impacts are clearly a result of the construction process rather than the design or location, as impacts will not occur if excavation or other ground disturbance is not involved.

195. As a result, there are several aspects of the environment which are not expected to be affected by the construction process and these can be screened out of the assessment at this stage as required by ADB procedure. These are shown in **Table 23**. These environmental factors are screened out presently but will be assessed again before starting of the construction activities.

**Table 23: Fields in which construction is not expected to have significant impacts**

Field	Rationale
Topography, Drainage, and Natural Hazards	Activities are not large enough to affect these features.
Geology, Geomorphology, Mineral Resources, and Soils	Activities are not large enough to affect these features. No mineral resources in the subproject location.
Climate	Activities are not large enough to affect this feature.
Air Quality	Short-term production of dust is the only effect on atmosphere
Geohydrology and Groundwater	Sustainable water source available at project sites
Protected Areas	No protected areas nearby the Gaya city and project locations
Flora and Fauna	No rare or endangered species .reported at project site
Land Use	No change in major land use.
Socio-economic	Subproject site is within govt. land. No socio economic impact
Commerce, Industry, and Agriculture	Activities are not large enough to affect these features
Population	Activities are not large enough to affect this feature.
Health and education facilities	Activities are not large enough to affect this feature.
Historical, Archaeological, Paleontological, or Architectural sites	No scheduled or unscheduled historical, archaeological, paleontological, or architectural sites

## 2. Construction method

196. ***Construction methodology of production tube well***

- Drilling work of pilot hole is to be taken up and completed up to recommend depth at respective point

- After the completion of pilot hole drilling, it is to be electrically logged, in order to identify the promising aquifers for screening it. On the basis of the physical observation of formation material (drill cuttings) and the Electro logging Test Results, corrected lithological log is to be prepared for recommending lowering of well pipe Assembly. On the basis of the study of Mechanical Analysis of Aquifer material for grain size distribution, the slot size & gravel size should be selected and recommended.
- On confirmation of well pipe Assembly, Pilot hole is to be reamed (enlarged) to 500 mm diameter for lowering 250 mm pipe diameter or hole diameter of 600 mm for lowering 300 mm pipe diameter, as the case may be, up to the total recommended depth of tube well.
- On lowering the pipe assembly into the enlarged hole, space between the (slotted & blank) pipe and enlarged hole should be packed with proper size gravel from the bottom of well up to the bottom of clay packing below ground level.
- From the top of the gravel packing, up to the ground level, perfect clay packing between Pipe and Hole is to be provided, for sanitary as well as water quality protection of well.
- Well is to be developed through backwashing prior to compressor development test.
- Production tube well is to be developed zone wise using Airline/Education pipe by using appropriate capacity of compressor for getting sand free discharge (or Well is to be developed at least for 40 to 50 hours whichever is less). Water samples should be collected for analysing chemical and biological parameters.
- Production tube well is to be developed (10 to 15 hours depending on the observation of sand free discharge it is indicative) through over pumping before conducting Pump Test. Thereafter Pump Test is to be conducted for yield test (5 to 6 hour continuous pumping) to recommend appropriate size & capacity of pump to be installed before putting the well. Water samples should be collected for analyzing chemical and biological parameters. Drawing 19 shows the typical drawing for production tube well and observation well.
- Disinfection system for tube wells. It is proposed to provide one Electro Chlorinator at each Tube Well capable of producing the required quantity chlorine ranging from 1kg/hr to 1.5 kg/hr to maintain 10ppm at the delivery pipe line. The raw material required in these chlorinators will be common salt. Provision has been made in the electrical panel proposed at each TW for power supply required for the electro chlorinator.

197. Construction of GLSR and Clear Water Reservoirs will be done as per scope of work. All construction waste will be dispose after taking permission from the GMC. Simple civil construction method will be applicable for reservoirs.

198. Rising mains will be buried in trenches adjacent to roads un-used RoWs. In some

areas occupied by drains or edges of shops and houses, trenches may be dug into the edge of the road to avoid damage to utilities and properties.

199. Trenches will be dug using a backhoe/manual, supplemented by manual digging where necessary. Excavated soil will be placed alongside, and the pipes (brought to site on trucks and stored on unused land nearby) will be placed in the trench by hand or using ropes for the Ductile Iron (DI) K9 pipes. Pipes will be joined by hand, after which filling will be done with the excavated soil manually upto the ground level and compacted by a vibrating compressor. Where trenches are dug into an existing roadway, the bitumen or concrete surface will be broken by hand-held pneumatic drills, after which the trench will be excavated by backhoe, and the appropriate surface will be reapplied on completion.

200. Pipes are normally placed by approx 1 m below the existing ground level/road level and a clearance of 200 mm is left between the pipe and each side of the trench to allow backfilling. Trenches will be around 1m deep and 700-1.2 m wide.

201. Simple civil construction guidelines will be followed for Operator Office at Dandibagh.

### **3. Anticipated Impacts and Mitigation Measures**

202. Although construction of the subproject components involves quite simple techniques of civil work, the invasive nature of excavation and the subproject locations in the built-up areas of Gaya city where there are a variety of human activities, will result to impacts to the environment and sensitive receptors such as residents, businesses, and the community in general. These anticipated impacts are temporary and for short duration. Physical impacts will be reduced by the method of working and scheduling of work, whereby the project components will be (i) constructed by small teams working at a time; (ii) refilled and compacted after pipes are installed; (iii) if trenching done on roads, repaired to pre-construction conditions and (iv) any excavation done near sensitive area like school, religious places and house will be protected as per standard norms<sup>6</sup>.

203. **Climatic Impact.** Potential impacts during construction are,

- The nature and intensity of rainfall events in an area, has implications for storm water management.
- Smoke from burning activities could be wider spread on windy days especially when dust could be blown off site.

#### **Mitigation measure:**

- ✓ Seasonal climatic variations will be considered during scheduling of construction activities in the area.
- ✓ Consideration of suitable season (non monsoon /lien period) for major construction activity

---

<sup>6</sup> Occupational Health and Safety of employees working only in factories and mines have been specifically covered in GOI laws. However, the Constitution of India has provisions to ensure that the health and well-being of all employees are protected and the State has the duty to ensure protection. For this subproject, the mitigation measures were based on the World Bank Environmental, Health, and Safety (EHS) Guidelines.

- ✓ Excavations and other clearing activities will only be done during agreed working times and permitted weather conditions.
- ✓ Storm water control (through drainage, diversion) during construction phase as per the method approved by the Engineer.

204. **Sources of Materials.** Significant amount of gravel, sand, and cement will be required for this subproject. The construction contractor will be required to:

- (i) The material sources permitted by government;
- (ii) Verify suitability of all material sources and obtain approval of PIU & DSC; and
- (iii) Submit to DSC on a monthly basis documentation of sources of materials.

205. **Air Quality.** Emissions from construction vehicles, equipment, and machinery used for excavation and construction will induce impacts on the air quality in the construction sites. Anticipated impacts include dusts and increase in concentration of vehicle-related pollutants such as carbon monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons) but temporary and during construction activities only. To mitigate the impacts, construction contractors will be required to:

- (i) Consult with DSC/PIU on the designated areas for stockpiling of clay, soils, gravel, and other construction materials;
- (ii) Damp down exposed soil and any stockpiled on site by spraying with water when necessary during dry weather;
- (iii) Avoiding the need to stockpile on site;
- (iv) Use tarpaulins to cover sand and other loose material when transported by trucks;
- (v) Fit all heavy equipment and machinery with air pollution control devices which are operating correctly and regular servicing of the vehicles & equipments off site in order to limit gaseous emissions; and
- (vi) Excess earth and other windblown loads in transit will be kept covered

206. **Surface Water Quality.** Mobilization of settled silt materials, run-off from stockpiled materials, and chemical contamination from fuels and lubricants during construction works can contaminate water body. These potential impacts are temporary and short-term duration only and to ensure these are mitigated, construction contractor will be required to:

- (i) Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets;
- (ii) Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with GMC/PIU on designated disposal areas;
- (iii) Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies;
- (iv) Proper discharge of waste water as generated during development of tube well

- (v) Place storage areas for fuels and lubricants away from any drainage leading to water bodies;
- (vi) Dispose any wastes generated by construction activities in designated sites; and
- (vii) Conduct surface quality inspection according to the Environmental Management Plan (EMP).

207. **Noise Levels.** There are no health facilities, scheduled or unscheduled historical, archaeological, paleontological, or architectural sites within the construction impact zones. However, construction works will be on settlements, along and near schools, and areas with small-scale businesses. The sensitive receptors are the general population in these areas. Increase in noise level may be caused by excavation equipment, and the transportation of equipment, materials, and people. Impact is negative, short-term, and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan activities in consultation with DSC/PIU so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance;
- (ii) Require horns not be used unless it is necessary to warn other road users or animals of the vehicle's approach;
- (iii) Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and portable street barriers the sound impact to surrounding sensitive receptor;
- (iv) Ensure that machinery is in a good state of maintenance.
- (v) Monitor noise levels in potential problem areas, and
- (vi) Maintain maximum sound levels not exceeding 80 decibels (dbA) when measured at a distance of 10 m or more from the vehicle/s.

208. **Generation of Spoil and disposal.** In case of disposal of the earth within the water body turbidity will be increased.

209. The following measures should be taken up,

- (i) Not to dispose any construction materials in water body which may pollute the surface water and aquatic fauna
- (ii) Disposal arrangement of muck as generated from tube well construction
- (iii) Spoil Disposal Management Plan (SDMP) will be prepared and implemented to minimize the potential effects of sediment plumes on aquatic habitats. Sample spoil management plan is attached as **Appendix 10.**
- (iv) Details of the proposed Water Quality Monitoring Program will be included in the environment management plan

210. **Existing Infrastructure and Facilities.** Excavation works can damage existing infrastructure located alongside roads, in particular water supply pipes. It will be particularly

important to avoid damaging existing water pipes. It is therefore important that construction contractors will be required to:

- (i) Utility shifting (if required) will be undertaken prior to commencing construction works.
- (ii) Keep construction related disturbances to a minimum.
- (iii) Consult with affected service providers regarding impacts on access to infrastructure and services and alternatives.
- (iv) Consult with affected communities or businesses prior to foreseeable disruptions, for example notifying residents of a temporary interruption of water supply.
- (v) Provide backup or alternative services during construction-related disruptions,
- (vi) Provide access points to infrastructure and services.
- (vii) Monitor complaints by the public

211. **Landscape and Aesthetics.** The construction works will produce excess excavated, excess construction materials, and solid waste such as muck, removed concrete, wood, trees and plants, packaging materials, empty containers, spoils, oils, lubricants, and other similar items. These impacts are negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Prepare and implement Waste Management Plan;
- (ii) Storage areas will be properly fenced off;
- (iii) Avoid stockpiling of excess excavated soils;
- (iv) Top soil needs to be utilised by farmers for nutrient value;
- (v) Coordinate with DSC-PIU for beneficial uses of excess excavated soils or immediately dispose to designated areas;
- (vi) Recover used oil and lubricants and reuse or remove from the sites;
- (vii) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas for improvement of aesthetic environment;
- (viii) Remove all wreckage, rubbish, or temporary structures which are no longer required; and
- (ix) Request DSC/PIU to report in writing that the necessary environmental restoration work has been adequately performed before acceptance of work.

212. Preliminary estimates indicate, overburden earth quantity (including road dismantling)

- For rising mains DI K9 pipes: 4909 m<sup>3</sup>
- Road Dismantling quantity: 2874 m<sup>3</sup>



Total waste- excavated earth & dismantling waste: 7783 m<sup>3</sup>. Excess earth after testing will be generally utilized for landfilling at water reservoir sites or will be disposed at low laying area after taking permission from GMC.

213. **Surface and Groundwater Quality.** Another physical impact that is often associated with excavation is the effect on drainage and the local water table if groundwater and surface water collect in the voids. To ensure that water will not pond in pits and voids near subproject location, the construction contractor will be required to conduct excavation works on non-monsoon season.

214. **Ecological resources –Terrestrial.** Felling of the trees (if any) will affect terrestrial ecological balance. Following mitigation measures will be applied,

- Minimize removal of vegetation and disallow cutting of trees if any at reservoir sites.
- Minimize removal of vegetation and disallow cutting of trees as far as possible through design modification particularly at Dandibagh
- If tree-removal will be required, obtain tree-cutting permit /NOC from concerned agency;
- Require to plant three (3) native trees for every one (1) that is removed; and
- Prohibit employees from poaching wildlife, bird hunting, and cutting of trees for firewood.
- Non removal of trees of religious importance

215. **Traffic & Accessibility.** Hauling of construction materials and operation of equipment on-site can cause traffic problems. Road safety concerns due to slow moving construction vehicles are also an impact. Traffic flow within the vicinity will be affected. The temporary road closure will result in a decrease in overall network performance in terms of queuing delay, travel times/ speeds. Also pedestrian movements will be affected by the temporary road closure or traffic diversion.

216. Potential impact is negative but short term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites;
- (ii) Schedule transport and hauling activities during non-peak hours;
- (iii) Locate entry and exit points in areas where there is low potential for traffic congestion;
- (iv) Keep the site free from all unnecessary obstructions;
- (v) Drive vehicles in a considerate manner;
- (vi) Coordinate with Govt. Traffic Department for temporary road diversions and with for provision of traffic aids if transportation activities cannot be avoided during peak hours; and

- (vii) Notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints.

217. Sample Traffic Management Plan is attached as **Annexure 11**.

218. **Social, Socio-Economic Including Income.** The subproject components will be located in Government land. Construction works will impede the access of residents to specific site in limited cases. The potential impacts are negative and moderate but short-term and temporary. The construction contractor will be required to:

- (i) Contractor's activities and movement of staff to be restricted to designated construction areas.
- (ii) Conduct of the construction staff when dealing with the public or other stakeholders shall be in a manner that is polite and courteous at all times.
- (iii) Leave spaces for access between mounds of soil;
- (iv) Provide walkways and metal sheets where required to maintain access across for people and vehicles;
- (v) Increase workforce in front of critical areas such as institutions, place of worship, business establishment, hospitals, and schools;
- (vi) Consult businesses and institutions regarding operating hours and factoring this in work schedules; and
- (vii) Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.
- (viii) Contractor shall submit to Engineer the confirmation obtained from the business/shop owner that such access was provided during project execution on the specified format titled "Confirmation from Operator of Commercial establishment/shop for provision of temporary Access by Contactor". This format is appended as **Appendix 12**.
- (ix) Lighting on the construction site shall be pointed downwards and away from oncoming traffic and nearby houses.
- (x) The site must be kept clean to minimize the visual impact of the site.
- (xi) Notice of particularly noisy activities must be given to residents / businesses adjacent to the construction site. Examples of these include:
  - noise generated by jackhammers, diesel generator sets, excavators, etc.
  - drilling
  - dewatering pumps
- (xii) Noisy activities must be restricted to the times given in the Project Specification or General Conditions of Contract
- (xiii) A complaints register (refer to the Grievance Redressal Mechanism) shall be housed at the site office.

219. **Socio-Economic – Employment.** Manpower will be required during the 18-months

construction stage. This can result to generation of contractual employment and increase in local revenue. Thus potential impact is positive and long-term. The construction contractor will be required to:

- (i) Employ at least 50% of the labour force, or to the maximum extent, local persons within the 2-km immediate area if manpower is available; and
- (ii) Secure construction materials from local market.

220. **Occupational Health and Safety.** Workers need to be mindful of the occupational hazards which can arise from working in height and excavation works. Potential impacts are negative and long-term but reversible by mitigation measures. World bank Environmental, Health, and Safety (EHS) Guidelines - EHS Guidelines for water & sanitation will be followed(<http://www.ifc.org/wps/wcm/connect/e22c050048855ae0875cd76a6515bb18/Final%2B-%2BWater%2Band%2BSanitation.pdf?MOD=AJPERE>). The construction contractor will be required to:

- ✓ Designate a safeguard focal person and undertake safeguards orientation by PMC/ DSC
- ✓ Develop and implement site-specific Health and Safety (H and S) Plan which will include measures such as: (a) excluding public from the site; (b) ensuring all workers are provided with and use Personal Protective Equipment; (c) H & S Training<sup>7</sup> for all site personnel; (d) documented procedures to be followed for all site activities; and (e) documentation of work-related accidents (approval will be required from PMC before implementation);
- ✓ Strict compliance of H&S plan and requirements of wearing personal protective equipment (PPE) during work hours;
- ✓ Provide specific guidance for suitable PPE for every on-site work assignment.
- ✓ Ensure that qualified first-aid can be provided at all times. Equipped first-aid stations shall be easily accessible throughout the site;
- ✓ Provide medical insurance coverage for workers;
- ✓ Secure all installations from unauthorized intrusion and accident risks;
- ✓ Provide supplies of potable drinking water;
- ✓ Provide clean eating areas where workers are not exposed to hazardous or noxious substances;
- ✓ Provide H and S orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;

---

<sup>7</sup> Some of the key areas that may be covered during training as they relate to the primary causes of accidents include (i) slips, trips and falls; (ii) personal protective equipment; (iii) ergonomics, repetitive motion, and manual handling; (iv) workplace transport; and (v) legislation and responsibilities. Training can provide the foundations of competence but it does not necessarily result in a competent worker. Therefore, it is essential to assess staff competence to ensure that the training provided is relevant and effective. Supervision and monitoring arrangements shall be in place to ensure that training has been effective and the worker is competent at their job. The level of supervision and monitoring required is a management decision that shall be based on the risks associated with the job, the level of competence required, the experience of the individual and whether the worker works as part of a team or is a lone worker.

- ✓ Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;
- ✓ Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;
- ✓ Ensure moving equipment is outfitted with audible back-up alarms;
- ✓ Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate; and
- ✓ Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.

221. There should be official notification related to penalties for non compliance of safety issues.

222. **Community Health and Safety.** Hazards posed to the public, specifically in high-pedestrian areas may include traffic accidents and vehicle collision with pedestrians. In most of the cases location of project sites at isolated area, hence health and safety risk to community is minimum. Potential impact is negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Plan routes to avoid times of peak-pedestrian activities.
- (ii) Liaise with DSC- PIU in identifying risk areas on route cards/maps.
- (iii) Maintain regularly the vehicles and use of manufacturer-approved parts to minimize potentially serious accidents caused by equipment malfunction or premature failure.
- (iv) Provide road signs and flag persons to warn of dangerous conditions, in case of location near the road.
- (v) Provide protective fencing around open trenches, and cover any open trench with metal planks during non-construction hours.

223. **Work Camps.** Operation of work camps can cause temporary air and noise pollution from machine operation, water pollution from storage and use of fuels, oils, solvents, and lubricants. Potential impacts are negative but short-term and reversible by mitigation measures. The construction contractor will be required to:

- (i) Consult with DSC-PIU before locating project offices, sheds, and construction plants;
- (ii) Minimize removal of vegetation and disallow cutting of trees;
- (iii) Provide water and sanitation facilities for employees;
- (iv) Prohibit employees from poaching wildlife and cutting of trees for firewood;

- (v) Train employees in the storage and handling of materials which can potentially cause soil contamination;
- (vi) Recover used oil and lubricants and reuse or remove from the site;
- (vii) Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas;
- (viii) Remove all wreckage, rubbish, or temporary structures which are no longer required; and
- (ix) Request DSC to report in writing that the camp has been vacated and restored to pre-project conditions before acceptance of work.

224. **Social and Cultural Resources.** For this subproject, excavation will occur at specific isolated location and along the roads, so it could be that there is a moderate risk of such impacts. Nevertheless, the construction contractor will be required to:

- (i) Strictly follow the protocol for chance finds in any excavation work;
- (ii) Request DSC- PIU or any authorized person with archaeological/historical field training to observe excavation; and
- (iii) Stop work immediately to allow further investigation if any finds are suspected; State Department of Archaeology will be contacted if any heritage resources or objects, defined in the Act, be discovered and all activities will be ceased until further notice.

### C. Operation and Maintenance Phase

#### 1. Screening out areas of no significant impact

225. Because a water supply system should operate without the need for major repair and maintenance, there are several environmental sectors which should be unaffected once the system begins to function. These are identified in **Table 24** below, with an explanation of the reasoning in each case. These factors are thus screened out of the impact assessment and will not be mentioned further.

**Table 24: Fields in which Operation and Maintenance of the Water Supply Component is not Expected to have Significant Impacts**

Field	Rationale
Climate	No impact expected
Wildlife, forests, rare species, protected areas	There are no wildlife, forests, rare species, and protected areas.
Coastal resources	Gaya is not located in a coastal area.
Industries	The water supplied by the new system will not be for industrial use

#### 2. Operation and Maintenance of the Improved Water Supply System

226. O & M of the water supply system will be the responsibility of GMC. A small number of people will be employed to operate and maintain the tube well, reservoir and pipelines. GMC will employ local contractors to conduct repairs, and contractors should be required to operate the same kinds of Health and Safety procedures as used in the construction phase to protect workers and the public.

227. The system have a design life of 30 years, during which shall not require major repairs or refurbishments and should operate with little maintenance beyond routine actions required to keep the pumps and other equipment in working order. The stability and integrity of the system will be monitored periodically to detect any problems and allow remedial action if required. Any repairs will be small-scale involving manual, temporary, and short-term works involving regular checking and recording of performance for signs of deterioration, servicing and replacement of parts.

228. The main O&M activities of the refurbished infrastructure will be detection and repair of leaks and pipe bursts. These are, however, likely to be minimal as proper design and selection of good quality pipe material should mean that leaks are minimal. Leak repair work will be similar to the pipe laying work as earlier explained. Trenches will be dug to reveal the leaking area; pipe will be removed and replaced if necessary.

### **3. Anticipated Environmental Impacts and Mitigation Measures**

229. **General.** If trenches are will be dug to locate and repair leaks or remove and replace lengths of pipe or illegal connections, the work will follow the same procedures during the construction stage. GMC needs to require its O and M contractor to:

- Refill and re-compact trenches soil and backfilled sand will be removed to expose the leaking junction or pipe;
- Conduct work during non-monsoon period; and
- Cover or wet excavated material to prevent dusts.

230. **Water source sustainability – water quantity and quality.** Construction of new tube wells and abstraction of excess water will affect water reserve at Gaya. Possible impacts on,

- Over-exploitation of aquifer – depletion of water reserve
- Sand quarrying: reduction of available aquifer thickness
- Contamination of aquifer by wastewater.
- Sand quarrying: contamination by accidental fuel and lubricant spills of equipment.

#### **Mitigation measures**

- Mitigated during design- pre construction phase
- Continuous monitoring water level and quality through observation well
- Prohibit sand mining in designated zones around wells.

231. **Health & safety issues.** Adverse impacts on the appearance of surrounding environment and exposure of workers to hazardous debris. Improvement of water supply system is expected to significantly enhance the quantity and quality of the supplied water. Reduction in leakages will ensure adequate supply of potable drinking water minimizing contamination risks with corresponding reduction in health risks to the citizens.

232. Mitigation measure include, Follow World bank EHS guidelines during operation phase



- Undertake regular monitoring and maintenance of water supply infrastructure.
- Regular chemical & biological testing of tube well (ground water) from supply sites. Parameters are as per Indian standard
- Sewage water will be treated in STP before discharge into environment, which will protect environment

233. **Storage of Common salt as chemical used in water treatment at tube well site.**

The impact associated with loss of chemical due to poor storage. Mitigation measures include,

- Storage should be in dry place
- Storage should be minimum
- Material safety data sheet to be maintained at chlorine/ common salt storage area
- Regular laboratory testing for dosing and residual chlorine
- Chlorination in water will be done as per CPHEEO manual and ensure residual chlorine within permissible limit.
- Trained workers will be depute for selected dosage of chlorine to be added in the water supply

234. **Ecological Resources.** There are no significant ecological resources in or around the city as well as project location, so any repairs or maintenance work can be conducted without ecological impacts.

235. **Economic Development.** There are no major anticipated economic development impacts during O and M of the facilities. Nevertheless GMC needs to require its O and M contractor to:

- (i) Inform all residents, businesses and sensitive receptors about the nature and duration of any work well in advance so that they can make preparations if necessary;
- (ii) Consult city authorities regarding any such work so that it can be planned to avoid traffic disruption as far as possible, and road diversions can be organised if necessary.

236. The provision of an improved and expanded water supply system is not expected to have direct economic benefits for business or industry, as connections will only be provided to domestic users. However businesses will almost certainly benefit from the expected improvement in the health and well-being of their workforce as this should result in fewer days lost through illness, and overall increased productivity.

237. **Social and Cultural Resources.** Although there is a medium risk of excavation in the city discovering material of historical or archaeological importance, there will be no need to take precautions to protect such material when areas are excavated to repair.

238. Repair works could cause some temporary disruption of activities at locations of social and cultural importance such as schools, hospitals, temples, tourist sites etc, so the same precautions as employed during the construction period should be adopted. GMC

needs to require its O and M contractor to:

- (i) Consult the city authorities to identify any buildings at risk from vibration damage and avoiding any use of pneumatic drills or heavy vehicles in the vicinity;
- (ii) Complete work in these areas quickly;
- (iii) Consult municipal authorities, custodians of important buildings, cultural and tourism authorities and local communities in advance of the work to identify and address key issues, and avoid working at sensitive times, such as religious and cultural festivals.

239. The citizens of the Gaya city will be the major beneficiaries of the improved water supply, as they will be provided with a constant supply of better quality water, piped into their homes. In addition to improved environmental conditions, the subproject will improve the over-all health condition of the town as diseases of poor sanitation (such as diarrhoea and dysentery) will be reduced.

240. **Aesthetics, Landscape character and Sense of Place.** The subproject is considered to be compatible with the surrounding landscape and is not likely to impact negatively on the existing visual quality or landscape character of the area; rather it is expected to improve the general environment through adequate supply of potable water in the subproject area.

#### **Mitigation measures**

- The new Tube well proposed to be constructed under this subproject will be similar in construction and design to existing Tube well in and around
- Monitor housekeeping, littering and illegal dumping.

241. **Appendix 13** depicts Indian Standards for Drinking Water - Specification (Bureau of Indian Standard, BIS 10500: 2012). The standard indicates desirable and permissible limit of drinking water under Indian condition.

#### **D. Cumulative Environmental Impacts**

242. As per present scope of work construction of new tube wells, construction of new CWR & GLSR and laying of new rising mains will ensure adequate supply of potable water to the water deficient areas and low pressure area. Also water loss will be checked through development of the project, which will save energy. The proposal for additional utilization of water reserve is related to water sustainability for future use. All sort of positive and negative impact has been studied to achieve the goals of a good urban water supply system. Cumulative impact is positive, which involves development of the city with better water supply system. At the same time there will also be reduce the health risks associated with contamination of water due to leakages in water supply pipelines. Metering of connections shall substantially reduce the non revenue water losses in the selected areas, which is also treated as positive cumulative impact towards development of a city.

243. **Table 25** presents the cumulative impacts which are impacts that result from the incremental impact of the subproject activity on a common resource when added to the impacts of other past, present, or reasonably foreseeable future activities. Cumulative

impacts are identified, predicted in the same level of detail as the impacts discussed above.

### E. Assessment of No-Go (No Build) Option

244. **Table 26** outlines potential impacts associated with the “No-Go” option. The No-Go option involves no additional commitment of resources. Choosing the No-Go option has the same effect as if the decision never occurred.

**Table 25: Summary of Anticipated Potential Cumulative Environmental Impacts**

Environmental Aspect	Summary of Implications and Mitigation	
	Potential Impacts	Mitigation
Significant enhancement in water production and storage facilities (only as additional after GWSP1)	<ul style="list-style-type: none"> <li>Construction of new tube well, storage facility and transmission of water shall ensure adequate supply of potable water to support projected requirement</li> </ul>	<ul style="list-style-type: none"> <li>Refer to tables above</li> </ul>
Sustainable water source impact	<ul style="list-style-type: none"> <li>Over exploitation of the Phalgu aquifer – resulting land subsidence and un-sustainability of water availability</li> <li>Contamination of water source by untreated wastewater.</li> </ul>	<ul style="list-style-type: none"> <li>Refer to tables above (Mitigated in design phase)</li> </ul>
Land use	<ul style="list-style-type: none"> <li>It is expected that improvement in the water supply system of the water deficient areas will act as a catalyst for overall development of the area.</li> </ul>	<ul style="list-style-type: none"> <li>Refer to tables above</li> </ul>

**Table 26: Summary of Anticipated Potential Environmental Impacts of the No Build Options**

Environmental Aspect	Summary of Implications and Mitigation	
	Potential Impacts	Mitigation
Climate	<ul style="list-style-type: none"> <li>No obvious impacts</li> </ul>	<ul style="list-style-type: none"> <li>n/a</li> </ul>
Air Quality	<ul style="list-style-type: none"> <li>Will remain the same</li> <li>No impacts on sensitive receptors during construction</li> </ul>	<ul style="list-style-type: none"> <li>None</li> </ul>
Geology	<ul style="list-style-type: none"> <li>No obvious impacts</li> </ul>	<ul style="list-style-type: none"> <li>n/a</li> </ul>
Drainage and hydrology	<ul style="list-style-type: none"> <li>No obvious impacts</li> </ul>	<ul style="list-style-type: none"> <li>n/a</li> </ul>
Land Use	<ul style="list-style-type: none"> <li>The water deficient areas shall continue facing the same impacts and their development shall be hindered.</li> </ul>	<ul style="list-style-type: none"> <li>None</li> </ul>
Traffic	<ul style="list-style-type: none"> <li>No obvious impact</li> </ul>	<ul style="list-style-type: none"> <li>n/a</li> </ul>
Health and Safety	<ul style="list-style-type: none"> <li>Subproject areas will continue facing health risks owing to degradation in water quality due to leakages in pipelines and storage reservoirs</li> </ul>	<ul style="list-style-type: none"> <li>None</li> </ul>
Noise and dust Pollution	<ul style="list-style-type: none"> <li>Noise and dust pollution will remain the same.</li> <li>No impacts on sensitive receptors during construction.</li> </ul>	<ul style="list-style-type: none"> <li>None</li> </ul>
Aesthetics, Landscape Character and sense of place	<ul style="list-style-type: none"> <li>Likely to deteriorate as sanitation of the area depends largely on availability of water supply.</li> </ul>	<ul style="list-style-type: none"> <li>None</li> </ul>

## **V. INFORMATION DISCLOSURE, CONSULTATION AND PARTICIPATION**

### **A. Project Stakeholders**

245. The primary stakeholders are:

- (i) Residents, shopkeepers and businesspeople who live and work alongside the roads in which improvements will be provided and near sites where facilities will be built;
- (ii) Custodians and users of socially and culturally important buildings in affected areas;
- (iii) State and local authorities responsible for the protection and conservation of archaeological relics, historical sites and artefacts; and

246. The secondary stakeholders are:

- (i) Urban Development Housing Department (UDHD) as the Executing Agency and Bihar Urban Infrastructure Development Corporation Ltd (BUIDCo) as implementation agency;
- (ii) Other government institutions whose remit includes areas or issues affected by the subproject (state and local planning authorities such as PHED, GMC);
- (iii) Forest Department, ASI, State archeological department;
- (iv) Non-government organizations (NGOs) and community-based organizations (CBOs) working in the affected communities;
- (v) Other community representatives (prominent citizens, religious leaders, elders, women's groups);
- (vi) The beneficiary community in general; and
- (vii) ADB, Gol, GoB and Ministry of Finance.

### **B. Public participation during the preparation of the IEE**

247. The public participation process included identifying interested and affected parties (stakeholders); informing and providing the stakeholders with sufficient background and technical information regarding the proposed development; creating opportunities and mechanisms whereby they can participate and raise their viewpoints (issues, comments and concerns) with regard to the proposed development; giving the stakeholders feedback on process findings and recommendations; and ensuring compliance to process requirements with regards to the environmental and related legislation.

248. The following methodologies have been used for carrying out public consultation:

- Local communities, individuals affected and owners and employees of affected commercial establishments who are directly or indirectly affected were given priority while conducting public consultation.

- Walk-through informal group consultations in the proposed subproject area.
- The local communities had been informed through public consultation with briefing on project interventions including its benefits.
- The environmental concerns and suggestions made by the participants were listed out, discussed and suggestions were accordingly incorporated in the EMP.

249. Different techniques of consultation with stakeholders were used during project preparation (interviews, official meeting, public meetings etc). Questionnaire was designed and environmental information was collected. Apart from this, a series of public consultation meetings were conducted during the subproject preparation. Various forms of public consultations (consultation through adhoc discussions on site) have been used to discuss the subproject and involve the community in planning the subproject design and mitigation measures.

250. **Table 27** show the person consulted during preparation of IEE, information collection and capturing their views.

**Table 27: List of Official person consulted during preparation of IEE**

S.No	Name	Designation	Place	Date	Issue Discuss	Remarks
1.	Mr. S. N. Jaiswal	Dy. Analyst	Pollution Control Board, Patna, Bihar	02.01.2014	Secondary/ published Data of Air, Water, Noise for Gaya	Water and Air data provided
2.	Mr. A. K. Srivastava	Water Lab Incharge	Pollution Control Board, Patna, Bihar	02.01.2014	Water Quality Data for Gaya	Dandibagh ground Water Data Received. Understanding of contamination of ground water.
3.	Mr. Arun Kumar	Air Lab In-charge	Pollution Control Board, Patna, Bihar	02.01.2014	Air quality Data for Gaya	Air Data received. Understanding air pollution status
4.	Mr. Dipak Kumar	Executive Engineer	Gaya Municipal Corporation	09.01.2014	About the pipeline which was laid down by Krioloskar and regarding advantage of proposed project	Information on present status of pipeline as laid down by Kirloskar
5.	Mr. Sailendra Kumar	Chemist	PHED, Gaya	13.11.2013	Groundwater quality	Collection of Ground Water Data
6.	Mr. K. P. Sharma	Retd. Executive Engineer	SPUR	09.01.2014	About the existing water supply system and water quality. Discussed specifically about Ward 53	Existing water supply information map data provided
7.	Mr. T.P. Sharma	Retd. Ex. En	SPUR	09.01.2014	About the existing water supply system and water quality. Discussed specifically about Ward 53	Existing water supply information map data provided

251. Further consultation has been carried out particularly for Gaya phase 2(GWSP2). Those

consultation is listed below

**Table 28: Official Consultation at Gaya 07.07.2014 to 11.07.2014**

S.No	Name	Designation	Discussion
1	Uchit Prasad Singh,	Horticulture Inspector	Flora ,Fauna
2	D. Pal	Plant protection Supervisor	Bio fertilizer, Pesticide, Insecticide contamination of river
3	Rakesh Kumar	Plant protection Supervisor	Bio fertilizer, Pesticide, Insecticide contamination of river
4	Jitendra Prasad Singh	Cashier -Tube well Div	Tube well at Phalgu River Bed
5	Sohail Ahmed Ansari	Assistant Engg-Irrigation Deptt.	Existing and proposed irrigation scheme near phalgu river bed, Water Harvesting Scheme
6	Laxmikant Choudhary	Minor Irrigation Deptt – Assistant Engineer	Scheme of Minor Irrigation Deptt.
7	City Manager	GMC	Solid Waste management, Sewerage, Drainage
8	Adil Husain	Sr. Engg Bodh gaya Nagar Panchayat	Water supply, Sewerage, Drainage, Solid Waste management, Sand Mining
9	Mr Amit	IT Manager, Bodhgaya Nagar Panchayat	Discussion on availability of infrastructure facility at Bodhgaya
10	Sanjay Kumar Lal	Executive Officer, Bodh Gaya	Discussion on availability of infrastructure facility at Bodhgaya
11	Praveen Sharma	Jindal Water Infra, Marketing Officer	Water Supply, Bodhgaya
12	Suresh Prasad	Operator, Military Engg	Water supply Bodhgaya
13	Rajnikant Misra	Farmer, Bhojubigha	Soil, Agriculture, Water level of River Bed, Pesticide, Fertilizer
14	New Upkar Beez Bhandar, Bodh Gaya		Pesticide Used
15	Kamaleshwar Rajak	Assistant Director, Mining	Mining in Phalgu River
16	Biswajit Dan	Dy. Director, Mining	
17	Ajay Kumar Sinha	Clerk, Forest Department	Flora and Fauna
18	Sudama Mahto	Distt AG Officer	Pesticide, Fertilizer, Flora and fauna

252. Also discussion was held with the local people during site visit. Issues discussed are:

- Awareness and extent of knowledge about the subproject.
- Information on the benefits of the subproject in terms of economic and environmental enhancement.
- Information on perceived losses from the proposed subproject during execution stage in terms of temporary disturbance like loss of access to residences, commercial establishments/shops, institutions, etc., traffic problem and increase in air and noise pollution, etc. during construction.
- Drinking water and other problems encountered if any
- Necessity of tree felling etc. at project sites
- Labour availability in the Project area or requirement of outside labour involvement



- Presence of any historical/cultural site in the vicinity.
- Presence of any protected area/wetland in or adjoining the construction site.
- Information on economic development in terms of creation of an important urban facility and generation of direct employment during the execution of the subproject.

253. Public consultations and group discussion meetings were conducted by PMC and PMU during 9<sup>th</sup> to 11<sup>th</sup> January 2014, 5<sup>th</sup> to 6<sup>th</sup> February 2015, 23<sup>rd</sup> February 2015 and 6<sup>th</sup> March 2015 at Gaya. The objectives were to appraise the stakeholders about the program's objectives and safeguard issues. These consultations are discussed in GWSP1 subproject IEE. Recently local level consultation has been carried out at Gaya on 19.08.2015, 31.08.2015, and 01.09.2015. Minutes of the local level consultations are attached as **Appendix 14**. The major issues raised are related to water quality, availability of water, health problem, and possible dust and noise problems during construction phase movement of vehicle / machinery and construction activity. Other comments include construction vehicles creating some disturbances to the local people daily activities, necessity of proper safety arrangements. The issues and comments have been considered and incorporated in the design of the subproject and mitigation measures for the potential environmental impacts raised during the public consultations.

### **C. Future Consultation and Disclosure**

254. Program Management Unit of BUIDCo extended and expanded the consultation and disclosure process significantly during implementation of BUDIP. They are in the process of appointing an experienced NGO to handle this key aspect of the program. The NGO continuously (i) conducts a wide range of activities in relation to all subprojects in the city; and (ii) ensures the needs and concerns of stakeholders are registered and are addressed in proposed subproject design.

255. For this subproject, the NGO/ Public Relationship and Community Development Specialist will develop, in close coordination with PMU and safeguard specialists of PMC, a public consultation and disclosure program which is likely to include the following:

- (i) Consultation during detailed design:
  - (a) Focus-group discussions with affected persons and other stakeholders (including women's groups, NGOs and CBOs) to hear their views and concerns, so that these can be addressed in subproject design where necessary; and
  - (b) Structured consultation meetings with the institutional stakeholders (government bodies and NGOs) to discuss and approve key aspects of the project.
- (ii) Consultation before start of construction activity:

- (a) Public meetings with affected communities (if any) to discuss and plan work program and allow issues to be raised and addressed once construction has started; and
  - (b) Smaller-scale meetings to discuss and plan construction work with individual communities to reduce disturbance and other impacts, and provide a mechanism through which stakeholders can participate in subproject monitoring and evaluation;
- (iii) Project disclosure
- (a) Communications strategy is of vital importance in terms of accommodating traffic during road closure, if any. Local communities will be continuously consulted regarding location of construction camps, access and hauling routes and other likely disturbances during construction. The road closure, if any, together with the proposed detours will be communicated via advertising, pamphlets, road signages, etc. Public information campaigns via newspaper/radio/TV, etc. wherever required, to explain the subproject details to a wider population. Public disclosure meetings at key project stages to inform the public of progress and future plans.

256. For the benefit of the community the summary of IEE will be translated in the local language and made available at: (i) BUIDCo office; (ii) District Magistrate Office; and, (iii) PIU/GMC. It will be ensured that the hard copies of IEE are kept at such places which are conveniently accessible to citizens as a means to disclose the document and at the same time creating wider public awareness. Electronic version of the IEE will be placed in the official website of the BUIDCo and the official website of ADB after approval of the IEE by ADB. The PIU will issue Notification on the locality-wise start date of implementation of the subproject. The notice will be issued by the PIU in local newspapers one month ahead of the implementation works. Copies of the IEE will be kept in the PMU/PIU office and will be provided to any person willing to consult the IEE.

257. Information, Education and Communication (IEC) materials for the sub project will be developed using mass-media techniques. Design of the systems and delivery of the messages will be responsibility of the NGO in consultation with the PMU/PMC. The process will include:

- ✓ Preparing education and awareness materials such as posters, billboards and streamers for community display
- ✓ Developing Leaflets and stickers for general awareness of all community members
- ✓ Television spots/messages of about 30 seconds duration
- ✓ Discuss with the PR team at PMU/PMC on the 'key messages' to be disseminated (indicated in table below)
- ✓ Videos
- ✓ Newspaper advertisements
- ✓ Any other suitable modern techniques

Key Messages to Specific Target Groups		
Sl.No.	Target Group	Key Message
1	All Citizens	<ul style="list-style-type: none"> <li>o Good citizens are those who pay bills on time, have legal connection, &amp; avoid water wastage.</li> <li>o Only good citizens can demand good services.</li> </ul>
2	Slum Dwellers	<ul style="list-style-type: none"> <li>o Safe storage of water; seek individual HH Legal connections.</li> </ul>
3	Middle/Upper Class	<ul style="list-style-type: none"> <li>o Pay bills on time; give up illegal connections.</li> </ul>
4	Business Centres/ Councillors	<ul style="list-style-type: none"> <li>o Discourage illegal connections; exhort to pay bill on time;</li> <li>o Participate in planning process by ULB &amp; PHED.</li> </ul>
5	Municipal Officers/ Municipal Supervisors/ Workers	<ul style="list-style-type: none"> <li>o Support to water supply project, PHED to facilitate improved services;</li> <li>o Communicate link between improper services &amp; water or vector borne diseases.</li> </ul>
6	Water Supply Dept. Workers, PHED Staffs	<ul style="list-style-type: none"> <li>o Support to water supply project;</li> <li>o Good water services means better work environment;</li> <li>o To meet with the state level norms</li> </ul>
7	Media	<ul style="list-style-type: none"> <li>o Good water services are good for families; it attracts more business &amp; industry</li> </ul>
8	School Teachers / Students	<ul style="list-style-type: none"> <li>o Clean water means healthier lives &amp; better education.</li> </ul>

## VI. GRIEVANCE REDRESSAL MECHANISM

258. A common Grievance Redress Mechanism (GRM) will be put in place to redress social, environmental or any other project and/or subproject related grievances. The GRM described below has been developed in consultation with stakeholders, including affected persons and NGOs.<sup>8</sup> Customer Service Centres (CSC) proposed in each town, including a central CSC will serve as the focal points for registration of grievances. The APs will also be encouraged to lodge their complaints through phone or email or post and seek a complaint registration number either through the CSCs or directly, through the project grievance redress cell at PIU

259. The Grievance Redress Mechanism provides an accessible, inclusive, gender-sensitive and culturally appropriate platform for receiving and facilitating resolution of affected persons' grievances related to the project. A Grievance Redress Cell will be established at PIU; the safeguards officer of PIU, supported by the social safeguards expert and social mobilisers of DSC will be responsible for conducting periodic community meetings with affected communities to understand their concerns and help them through the process of grievance redressal including translating the complaints into Hindi or English from the local language, recording and

<sup>8</sup>The draft Grievance Redress Process has been circulated and discussed with the following Bihar-based NGOs and research institutes working on environment, social and gender issues, for comments: Asian Development Research Institute, Participatory Research in Asia, Nav Manas Kalyan Samiti and Taru Mitra.

registering grievances of non-literate affected persons and explaining the process of grievance redress mechanism. All expedient and minor grievances will be resolved at project level; should the PIU fail to resolve any grievance within the stipulated time period, the PMU will be consulted and suggested actions by PMU taken by PIU with DSC support, within specified time. PIU will also be responsible for follow-through for each grievance, periodic information dissemination to complainants on the status of their grievance and recording their feedback (satisfaction/dissatisfaction and suggestions).

260. The GRM aims to provide a time-bound and transparent mechanism to voice and resolve social and environmental concerns linked to the project. All grievances – major or minor, will be registered. In case of grievances that are immediate and urgent in the perception of the complainant, the contractor, and supervision personnel from the PIU supported by DSC will try to successfully resolve them. In case of larger issues, they will seek the advice and assistance of the PMU.<sup>9</sup> Grievances not redressed through this process within/at the project level within stipulated time period will be referred to the City Level Committee/Grievance Redress Committee. GRC notification at state level has been issued on 27.05.2015.

261. City Level committees will be set up to monitor project implementation in each town. In its role as a Grievance Redress Committee (GRC), the CLC will meet every month (if there are pending, registered grievances), determine the merit of each grievance, and resolve grievances within specified time upon receiving the complaint-failing which the grievance will be addressed by the state-level Project Steering Committee (PSC). The PSC will resolve escalated/unresolved grievances received. Grievances related to land acquisition; rehabilitation and resettlement remaining unresolved by PSC will be referred by affected persons to the Land Acquisition, Rehabilitation and Resettlement Authority, if constituted during the project period in the state, or, to appropriate courts of law.<sup>10</sup> The multi-tier GRM for the project is outlined below (**Figure 24**), each tier having time-bound schedules and with responsible persons identified to address grievances and seek appropriate persons' advice at each stage, as required. The GRC will continue to function throughout the project duration. The PMU has issued a notification to tranche 1 and 2 project towns to establish the respective city level GRCs, with details of composition, process of grievance redress to be followed, time limit for grievance redress at each level, etc.


262. In the event that the established GRM is not in a position to resolve the issue, the affected person also can use the ADB Accountability Mechanism through directly contacting (in writing) the Complaint Receiving Officer (CRO) at ADB headquarters or the ADB India Resident Mission (INRM). The complaint can be submitted in any of the official languages of ADB's DMCs. The ADB Accountability Mechanism information will be included in the PID to be distributed to the affected communities, as part of the project GRM.

---

<sup>9</sup> The grievance redress mechanism cannot address expropriation related issues. Grievances related to the award of compensation can be addressed by the district collector's office and court of law.

<sup>10</sup> The land acquisition, rehabilitation and resettlement authority is required to be set up in every state as per LARR Act, 2013. The authority is not in place in Bihar yet. Until such time that the authority is constituted in the state, aggrieved parties will be able to directly approach the courts of law at any stage.

263. Composition of GRC and PSC: The CLC, acting as GRC will have District Magistrate (Chairperson), Mayor, Municipal Commissioner, Head, PIU (Convener), and City Level Heads of relevant departments (such as BRJP, Road Construction Department, PHED, Electricity Board, State Pollution Control Board, Police, etc. and departments such as Forest Department, Railways etc.); Chairpersons of the concerned Municipal Corporation’s Standing Committee; ULB officials including Municipal Engineer, Town Planning Officer, Medical and Health Officer; representatives from the affected village panchayat and / or community, if any, eminent citizens, CBOs and NGOs. The GRC/CLC must have a minimum of two women members. In case of any indigenous people impacts in future sub projects, the GRC/CLC must have representation of the affected indigenous people community, including at least one female indigenous person, the chief of the tribe or a member of the tribal council as traditional arbitrator (to ensure that traditional grievance redress systems are integrated) and an NGO working with indigenous people groups.

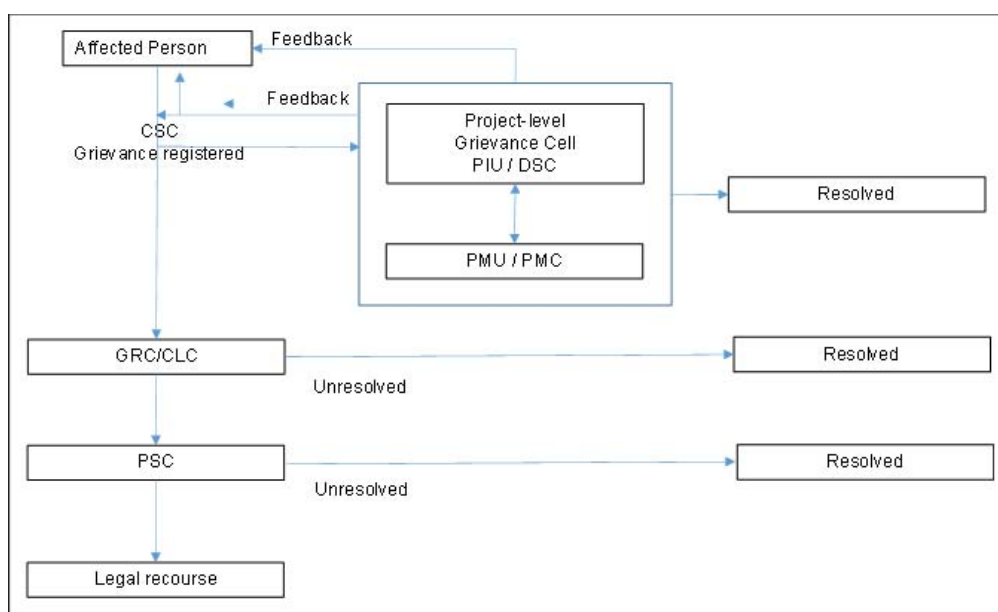

**Figure 24: Grievance Redress Mechanism Process**

**CLC=city level committee, CSC=customer service center, GRC=grievance redress committee; GRM=grievance redress mechanism,, PIU= project implementation unit, PMU =project management unit, PSC=project steering committee**

264. The PSC will include the Minister for Urban Development (Chairperson), State Chief Secretary (Vice Chairperson), and Ministers, Directors and/or representatives of other relevant government ministries and departments, e.g., Finance, Planning, PHED, Roads, BRJP, etc., Mayors of respective municipal corporations and the project director (Member Secretary and Convener) as members.

265. **Areas of Jurisdiction:** The areas of jurisdiction of the GRC–headed by the District Magistrate will be (a) all locations/sites within the district where sub-project facilities are proposed, or (b) their areas of influence within the District. The PSC shall have jurisdictional

authority across the State (i.e., areas of influence of sub-project facilities beyond district boundaries, if any).

266. **Consultation Arrangements:** This will include regular group meetings and discussions, at least twice during resettlement plan preparation, with affected persons by the social safeguards personnel of DSC and PIU. During the first year of RP implementation, such meetings will take place on a quarterly basis, while in subsequent years; these meetings will be held at least twice a year. The consultation arrangement thus envisaged is intended to address both general and/or specific individual grievances through a participatory approach. Besides, the consultative process is meant to be flexible to provide timely mitigation of grievances of the APs. The most complex cases will be dealt with through one-to-one consultation with particular APs by a host of actors comprising social safeguard expert of DSC and Resettlement Officer, PIU, with the support of PMU and PMC as and when required. DSC will be responsible for ensuring that non-literate affected persons and/or vulnerable affected persons are assisted to understand the grievance redress process as well as for encouraging them to register complaints and follow-up with relevant authorities at different stages in the process.

267. **Recordkeeping:** Records of all grievances received, including contact details of complainant, date the complaint was received, nature of grievance, agreed corrective actions and the date these were effected and final outcome will be kept by PIU (with the support of CSCs and DSC) and submitted to PMC.

268. **Information Dissemination Methods of the GRM:** The PIU, assisted by DSC will be responsible for information dissemination to affected persons on grievance redressal procedure. ULB-wide public awareness campaigns will ensure that awareness on grievance redress procedures is generated through the consultation and participation plan. Public awareness campaign will be conducted to ensure that awareness on the project and its grievance redress procedures is generated. The PIU environment and social safeguard officers will be assisted by design and supervision consultant (DSC) safeguards specialists with information/collateral/awareness material etc. and in conducting project awareness campaigns. The campaign will ensure that the poor, vulnerable and others are made aware of grievance redress procedures and entitlements per project Resettlement Framework including. who to contact and when, where/ how to register grievance, various stages of grievance redress process, time likely to be taken for redressal of minor and major grievances, etc. Grievances received and responses provided will be documented and reported back to the affected persons. The number of grievances recorded and resolved and the outcomes will be displayed/disclosed in the PMU and PIU offices, ULB/concerned local panchayat notice boards and on the web, as well as reported in the semi-annual environmental monitoring reports to be submitted to ADB. A Sample Grievance Registration Form has been attached in **Appendix 15**.

269. **Review and Documentation: Periodic review and documentation of lessons learned.** The PMU safeguard officers will periodically review the functioning of the GRM and record information on the effectiveness of the mechanism, especially on the PIU's ability to prevent and address grievances.

270. **Costs:** All costs involved in resolving the complaints (meetings, consultations, communication and reporting / information dissemination) will be borne by the PMU.

271. Grievance Redress committee has been already set up at BUIDCo under BUDIP.

## **VII. ENVIRONMENTAL MANAGEMENT PLAN**

272. The EMP will guide the environmentally sound construction of the subproject and ensure efficient lines of communication between the DSC (Engineer), contractors, and PIU/ PMU/ PMC. The EMP identifies three phases of development as: (i) site establishment and preliminary activities; (ii) construction phase; and (iii) post construction/operational phase.

273. The purpose of the EMP is to ensure that the activities are undertaken in a responsible non-detrimental manner with the objectives of: (i) providing a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site; (ii) guiding and controlling the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iii) detailing specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (iv) ensuring that safety recommendations are complied with.

274. A copy of the EMP must be kept onsite during the construction period at all times. The EMP will be made binding on all contractors operating on the site and will be included in the Contractual Clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance. It shall be noted that the Supreme Court of India<sup>11</sup> mandates that those responsible for environmental damage must pay the repair costs both to the environment and human health and the preventive measures to reduce or prevent further pollution and/or environmental damage. (The polluter pays principle).

275. The Contractor is deemed not to have complied with the EMP if:

- within the boundaries of the site, site extensions and haul/ access roads there is evidence of contravention of clauses;
- if environmental damage ensues due to negligence;
- the contractor fails to comply with corrective or other instructions issued by the Engineer/PMU/PIU within a specified time; and
- the Contractor fails to respond adequately to complaints from the public.

### **A. Institutional Arrangement**

276. The main agencies involved in managing and implementing the subproject are:

- (i) UDHD is responsible for management, coordination, and execution of all activities funded under the loan;
- (ii) BUIDCo, PMU is responsible for coordinating construction of subprojects across all towns, and for ensuring consistency of approach and performance;

---

<sup>11</sup> Writ petition no 657 of 1995. The Supreme Court, in its order dated 4 February 2005, that "The Polluter Pays Principle means that absolute liability of harm to the environment extends not only to compensate the victims of pollution, but also to the cost of restoring environmental degradation. Remediation of damaged environment is part of the process of sustainable development."



- (iii) PMC assists PMU in managing the program and assures technical quality of design and construction;
- (iv) DSCs design the infrastructure, manage tendering of Contractors and supervise the construction process;
- (v) PIUs appoint and manage the Contractor to design, build and operate elements of the infrastructure in a particular town;
- (vi) A Program Steering Committee (PSC)<sup>12</sup> assists UDHD in providing policy guidance and coordination across all towns and subprojects; and
- (vii) City/Town Level Committees<sup>13</sup> (C/TLCs) have also been established in each program town/city to monitor project implementation in the town and provide recommendations to the PIU where necessary.

277. **PMU's Role in Safeguards.** The PMU within BUIDCo have an Environmental and Social Management Coordinator (ESMC) who address environmental and social safeguards issues with assistance from Program Management Consultants (PMC). Environment Engineer of PMU will responsible of supervision and management of environment issues related to engineering aspects of the project. The PMC includes an Environmental Specialist and a Social Safeguards Specialist engaged. The ESCMC will ensure that the EARF, resettlement framework, and IPPF are followed during subproject implementation as well as the environmental management plan and resettlement plan prepared for different Tranches. The ESCMC through the PMC also lead preparation of safeguards documents for future Tranches with inputs from PIU/ DSC.

278. **The Project Management Consultants (PMC)** has an Environmental Specialist (ES) and Resettlement/Social Development Specialist who are responsible for the preparation of IEE/EIA and RP/IPP reports respectively. The Environment Specialist and Resettlement/Social Development Specialist of PMC will review and finalize all reports in consultation with the ESCMC of PMU. The Environmental Specialist (ES) and Resettlement/Social Development Specialist of PMC will submit periodic monitoring and implementation reports to PMU, who will take follow-up actions, if necessary.

279. The ESCMC of PMU will endorse/submit periodic monitoring reports received from PMC to the Program Director, PMU who will then submit these to ADB. The monitoring report will focus on the progress of implementation of the IEE/EIA and EARF, RP/RF and IPP/IPF, issues encountered and measures adopted, follow-up actions required, if any, as well as the status of compliance with subproject selection criteria, and relevant loan covenants. The PMU will seek

---

<sup>12</sup>PSC: Development Commissioner; Principal Secretary, Finance; Principal Secretary, Planning and Development; and Principal Secretary, Urban Development and Housing.

<sup>13</sup> CLC: District Magistrate (Permanent invitee), Municipal Commissioner (Chairperson), Head, Project Implementation Unit or Program Manager (Convener), and City Level Heads of relevant departments (such as BRJP, Road Construction Department, PHED, Electricity Board, State Pollution Control Board, Police, etc. and departments such as Forest Department, Railways etc.); ULB officials including Municipal Engineer, representatives from the affected town community, if any, eminent citizens, CBOs and NGOs.

GoB clearance for submission and disclosure of the environmental and social monitoring report to ADB.

280. **PIU's Role in Safeguards.** The PIU is primarily tasked with the day-to-day implementation of safeguards plans. PIU field offices in program towns will have a Safeguard Officer who will be responsible for data collection for IEE/EIA and RP/IPP preparation and implementation. PIU field offices will obtain right of way clearances and prepare progress reports with respect to IEE/EIA and RP/IPP implementation. PIU will be responsible for obtaining statutory clearances and obtaining NOCs from government agencies/other entities and entering into agreements with them for use of their land. It will also co-ordinate for obtaining right of way clearances with related State and National agencies.

281. **The Contractor**

This individual/agency:

- complies with all applicable legislation, is conversant with the requirements of the EMP, and briefs staff about the requirements of same;
- ensures any sub-contractors/ suppliers, who are utilized within the context of the contract, comply with the environmental requirements of the EMP. The Contractor will be held responsible for non-compliance on their behalf;
- supplies method statements for all activities requiring special attention as specified and/or requested by the Engineer or Environmental Specialist during the duration of the Contract;
- provides environmental awareness training to staff;
- bears the costs of any damages/ compensation resulting from non-adherence to the EMP or written site instructions;
- conducts all activities in a manner that minimizes disturbance to directly affected residents and the public in general, and foreseeable impacts on the environment.
- ensures that the Engineer is informed in a timely manner of any foreseeable activities that will require input from the Environmental Specialist
- appoints one full time Environment & Safety Officer for implementation of EMP, community liaison, reporting and grievance redressal on day to day basis.
- receives complaints/grievances from the public, immediately implements the remedial measures and reports to the Engineer (DSC) and PIU within 48 hours.

282. Summary of responsibility,


✓ **Responsible for carrying out mitigation measures**

- During construction and operations stages, implementation of mitigation measures is the Contractor's responsibility.

- To ensure implementation of mitigation measures during the construction period, contract clauses for environmental provisions will be part of the civil works contracts.
  - Contractors' conformity with contract procedures and specifications during construction will be carefully monitored by the Safeguard Officer of PIU.
- ✓ **Responsible for carrying out monitoring measures**
- During construction, PMC's Environmental Specialist and the Safeguard Officer of PIU will monitor the Contractor's environmental compliance.
  - During the operation stage, monitoring of the Contractor's environmental compliance will be the responsibility of the PMC and PIU/PMU
- ✓ **Responsible for reporting**
- UDHD (EA)/BUIDCo (PMU- IA) will submit to ADB semi annual reports on implementation of the EMP and will permit ADB to field annual environmental review missions which will review in detail the environmental aspects of the subproject. Any major accidents having serious environmental consequences will be reported immediately.

283. Report format for semi - annual report is attached as **Appendix 16**.

284. Safeguard implementation arrangement for the program is shown below.

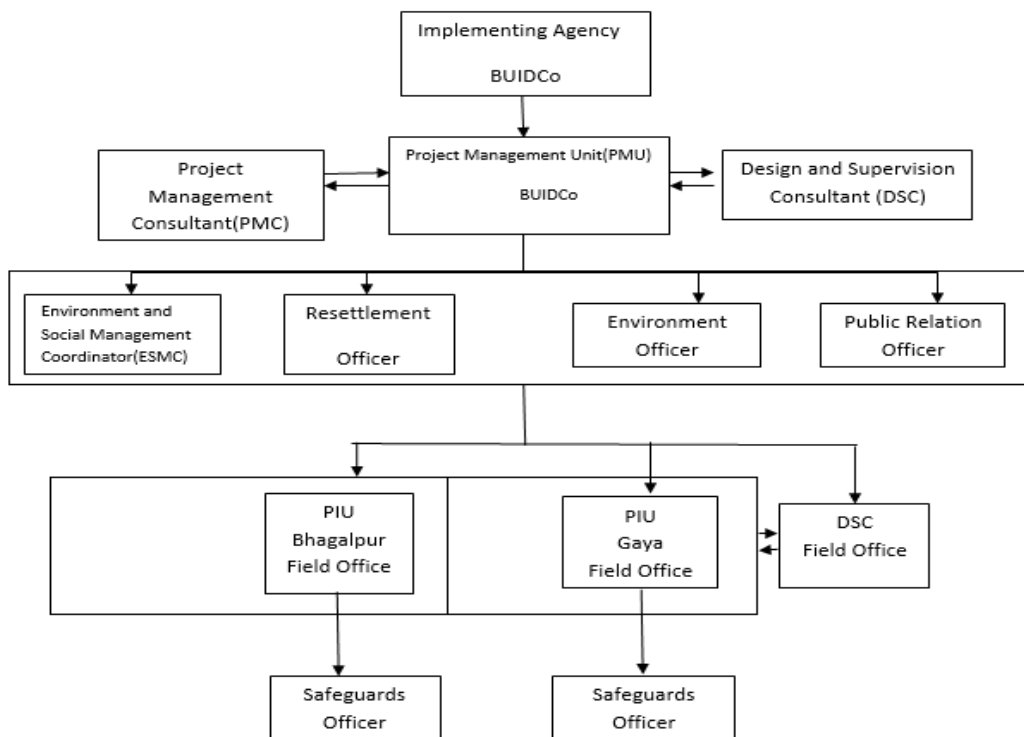

**Figure 25: Safeguards Implementation Arrangement**

## B. Capacity Building

285. Training and orientation program shall be organized by the Environmental Specialist of PMC and PMU for the contractors, laborers, and technical and office staff of the contractors, site engineers of DSC and the relevant staff of the PIU for building their capacity with regards to principles and procedures of environmental management, pollution abatement measures, public consultation and participation, health and safety measures, grievance redressal mechanism and implementation of EMP.

**Table 29: Training Program for Environmental Management**

Program	Description	Participants	Form of Training	Duration/ Location	Conducting Agency
<b>A. Pre-Construction Stage</b>					
<b>Module 1- Sensitization Workshop</b>	<p><b>INTRODUCTION TO ENVIRONMENT ISSUES- Sensitization Workshop</b></p> <ul style="list-style-type: none"> <li>✓ Basic Concept of Environment &amp; Environmental consideration of development project</li> <li>✓ Explanation on ADBs SPS 2009 Guidelines, what are the different safeguard documents required to be prepared by the Project – Environment Assessment &amp; Review Framework, EIA/IEE, Environment Management Plan (EMP)</li> <li>✓ Environmental Regulations and Statutory requirements as per Government of India, Government of Bihar and ADB</li> </ul>	Secretaries, Chief Engineer, Superintendent Engineers of PHED, ULB, PMU; Project Manager, ESMC of PMU, Safeguard Officer of PIU, Concerned Engineers of DSC	Workshop	¼ Working Day	PMC / ADB Environment Safeguard Specialist
<b>Module 2</b>	<p><b>Season 1 Environmental Considerations in Urban Development Projects</b></p> <ul style="list-style-type: none"> <li>✓ Environmental components affected by urban development in construction and operation stages- BUDIP case</li> <li>✓ Rules and Regulations need to comply for implementation of BUDIP</li> <li>✓ Activities causing</li> </ul>	<ul style="list-style-type: none"> <li>▪ PIU/PMU</li> <li>▪ DSC</li> <li>▪ Concerned Engineers from PHED, ULB and relevant dept.</li> </ul>	Lecture	¼ th Day	Environmental Specialist of PMC

Program	Description	Participants	Form of Training	Duration/ Location	Conducting Agency
	<p>pollution during construction and operation stages – BUDIP case</p> <p>✓ Environmental Management Good Practices in Urban Infrastructure Projects – BUDIP case</p>				
	<p><b>Season 2</b>  <b>Review of EIA/ IEE and its Integration into Designs</b></p> <p>✓ EIA/ IEE Methodology</p> <p>✓ Environmental Provisions in the EMPs</p> <p>✓ Identification of mitigation measures and study of alternatives.</p> <p>✓ Implementation Arrangements</p> <p>✓ Methodology of Assessment of Pollution Monitoring</p> <p>✓ Methodology for site selection of borrow areas, waste disposal areas etc.</p> <p>✓ Incorporation of mitigating measures in the project design and contracts, co- ordination between the safeguard specialists and the design team, to ensure site visits are conducted by the design team and safeguard specialists.</p>	<ul style="list-style-type: none"> <li>▪ PIU/PMU</li> <li>▪ DSC</li> <li>▪ Concerned Engineers from ULB and relevant dept.</li> </ul>	Lecture	¼ th Day	Environmental Specialist of PMC
	<p><b>Season 3</b>  <b>Improved Coordination with other Departments</b></p> <p>✓ Overview of the Project Environmental Impacts</p> <p>✓ Statutory Permissions Procedural Requirements</p> <p>✓ Cooperation and Coordination with other Departments</p>	<p>PIU/PMU</p> <p>DSC</p> <p>Concerned Engineers from PHED, ULB and relevant dept.</p>	Lecture	¼ th Day	Environmental Specialist of PMC
	<p><b>Season 4</b>  <b>Special Issues in the Project</b></p>	<ul style="list-style-type: none"> <li>▪ PIU/PMU</li> <li>▪ DSC</li> <li>▪ Concerned</li> </ul>	Lecture	¼ th Day	Environmental Specialist of PMC

Program	Description	Participants	Form of Training	Duration/ Location	Conducting Agency
	<ul style="list-style-type: none"> <li>✓ Bio-Diversity Assessment and Conservation</li> <li>✓ Statutory Permissions (specifically for the project)– Procedural Requirements</li> <li>✓ Consultation and Counseling- Public consultation – sharing the project details and getting the opinion of the people especially in the case of displacement, incorporating the suggestions of the people in design as feasible and minimization of environmental impact.</li> <li>✓ Grievance redressal mechanism – institutional arrangements</li> </ul>	Engineers from PHED, ULB and relevant dept.			
<b>Module 3</b>	<b>Role during Construction</b> Roles and Responsibilities of officials/ contractors/ consultants towards protection of environment Implementation Arrangements	1. PIU/PMU 2. DSC 3. Construction contractor	¼ th Day	Lecture	Environmental Specialist of PMC
	If a half day site visit can be organized to a site where good practice has been adopted by the project to avoid impact, it will be a case study for the participants		½ Day	Field visit	Environmental Specialist of PMC, ESMC PMU
	Group Exercise – to discuss the issues identified during the field visit and how to address it, followed by an open house for questions		¼ th Day	Group Discussion	Environmental Specialist of PMC, ESMC PMU, Safeguard officer of PIU, Engineer of DSC, Construction contractor
	Monitoring and Reporting System		¼ th Day	Lecture	Environmental Specialist of PMC

286. Environmental Management Plan is prepared for pre construction, construction and post construction stages.

287. **Table 30** outlines the site establishment and preliminary activities.

288. **Table 31** outlines management of construction activities and workforce.
289. **Table 32** outlines the post-construction activities.



**Table 30: Generic EMP: Site Establishment and Preliminary Activities - Design phase**

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
1.	Legislation, permits and agreements	In all instances- covering Environment & Forest, BUIDCo, implementation agency, contractors and consultants must remain in compliance with relevant local and national legislation.	SO- PIU, E- DSC	ES- PMC, ESMC- PMU, EE- PMU	Prior to moving onto site and Quarterly during construction
		Proof of compliance to Air Act & Noise Act must be forwarded by the contractor to PMU/PMC/PIU (in relation to hot mixing, batch mix plants, stone crushers, diesel generators, etc. if any)	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	Prior to moving onto site and Quarterly during construction
		Forest land clearance, NOC from forest Dep. for renovation work, clearance from State Museum & Archaeological Directorate	SO-PIU, DSC	ES- PMC, ESMC- PMU, EE- PMU	Prior to moving onto site and Quarterly during construction for compliance
		A copy of the EMP must be kept on site during the construction period	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	At all times
2	Water Source Sustainability	Study on availability of quality water from Phalgu river bed For protection of sub surface water source construction of Sewage Treatment Plant (STP) should be taken up and city's waste water will be treated before discharge into the Phalgu river	E- DSC, PMU	ES- PMC, ESMC- PMU	During designing of the project
3	Access to site <sup>14</sup>	Access to site at water storage reservoir and tube well locations will be via existing roads. The Contractor will need to ascertain the existing condition of the roads and repair damage due to construction. Site management plant and alignment of approach road to site needs	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Prior to moving onto site and monthly

<sup>14</sup> Access to site and traffic management shall be done in accordance to the directions of Engineer

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		to be followed			
		The Local Traffic Department must be informed at least a month in advance if the traffic in the area will be affected (if any)	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Prior to moving onto site and quarterly
		The location of all affected services must be identified and confirmed.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Prior to moving onto site and quarterly
		All roads for construction access must be planned and approved by the Engineer and its Environmental Specialist ahead of construction activities. They shall not be created on an ad-hoc basis.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Prior to moving onto site and during construction - quarterly
		No trees, shrubs or groundcover may be removed or vegetation stripped without the prior permission of the Engineer/Environmental Specialist	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	Before and during construction- semi annually
4	Setting up of construction camp <sup>15</sup>	Choice of site for the Contractor's camp requires the Engineer's/ ES permission and must take into account location of local residents, businesses and existing land uses, including flood zones and slip / unstable zones. A site plan must be submitted to the Engineer for approval.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During surveys and preliminary investigations and prior to moving onto the site
		The construction camp may not be situated on a floodplain or on slopes greater than 1:3 (Horizontal: Vertical ratio). Preferable slope 1:1 (plain land) or 1:2 (marginal slope)	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During surveys and preliminary investigations and prior to moving onto the site- quarterly monitoring
		Private land needs to be avoided. If no option NOC from Pvt. party will be required	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site establishment and ongoing – monthly inspections
		In most cases, on-site accommodation will not be required. The construction camp	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During set-up and monthly

<sup>15</sup> Careful planning of the construction camp can ensure that time and costs associated with environmental management and rehabilitation are reduced.

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		<p>can thus be comprised of:</p> <ul style="list-style-type: none"> <li>• site office</li> <li>• designated first aid area</li> <li>• separate eating areas</li> <li>• storage areas</li> <li>• batching plant (if required)</li> <li>• refueling areas (if required)</li> <li>• maintenance areas (if required)</li> <li>• crushers (if required)</li> </ul>	Contractor	PMU, EE- PMU	
		The camp must be properly fenced and secured	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site establishment and ongoing –monthly inspections
		The Contractor shall make adequate provision for temporary toilets (gender specific) for the use of their employees during the Construction Phase. Such facilities, which shall comply with local authority regulations, shall be maintained in a clean and hygienic condition. Their use shall be strictly enforced.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site establishment and ongoing – weekly inspections
		Bins shall be provided at convenient intervals for disposal of waste within the construction camp.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and ongoing- weekly
5.	Establishing equipment lay-down and storage area <sup>16</sup>	Choice of location for equipment lay-down and storage areas must take into account distances to adjacent land uses, general onsite topography and water erosion potential of the soil. Impervious surfaces must be provided where necessary.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	During site set-up
		Storage areas shall be secured so as to minimize the risk of crime. They shall also be safe from access by children / animals etc.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly

<sup>16</sup> Storage areas can be hazardous and unsightly and can cause environmental pollution if not designed and managed carefully.

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		Residents living adjacent to the construction site must be notified of the existence of the hazardous storage area.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During site set-up and monthly
		Equipment lay-down and Storage areas must be designated, demarcated and fenced if necessary.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly
		Fire prevention facilities must be present at all storage facilities.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly
		Proper storage facilities for the storage of oils, paints, grease, fuels, chemicals and any hazardous materials to be used must be provided to prevent the migration of spillage into the ground and groundwater regime around the temporary storage areas.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly
		These storage facilities (including any tanks) must be on an impermeable surface that is protected from the ingress of storm water from surrounding areas in order to ensure that accidental spillage does not pollute local soil or water resources.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly
		Fuel tanks must meet relevant specifications and be elevated so that leaks may be easily detected.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly
		Staff dealing with these materials / substances must be aware of their potential impacts and follow the appropriate safety measures.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and monthly
6.	Materials management – sourcing <sup>17</sup>	Prioritize sites already permitted by the Mining Department	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	On receipt of natural materials
		Contractors shall prepare a source	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-	On award of contract and

<sup>17</sup> Materials must be sourced in a legal and sustainable way to prevent offsite environmental degradation.

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		statement indicating the sources of all materials (including sands, natural gravels, crushed stone, asphalt, clay liners, etc), and submit these to the Engineer for approval prior to commencement of any work.	Contractor	PMU, EE- PMU	continued quarterly
		If other sites are necessary, inform construction contractor that it is their responsibility to verify the suitability of all material sources and to obtain the approval of DSC	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	On receipt of natural materials and continued quarterly
7.	Education of site staff on general and environmental conduct <sup>18</sup>	Ensure that all site personnel have a basic level of environmental awareness training.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	During staff induction and ongoing monthly monitoring
		Staff operating equipment (such as excavators, loaders, etc.) shall be adequately trained and sensitized to any potential hazards associated with their task.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	During staff induction, followed by ongoing weekly
		All employees must undergo safety training and wear the necessary protective equipments (e.g helmets, gloves, gumboots, nose mask, ear plugs as per type of work) and clothing.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	During staff induction, followed by monthly monitoring
		A general regard for the social and ecological well-being of the site and adjacent areas is expected of the site staff. Workers need to be made aware of the following general rules: <ul style="list-style-type: none"> <li>• no alcohol/drugs on site;</li> <li>• prevent excessive noise;</li> <li>• construction staff are to make use of the facilities provided for them, as</li> </ul>	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC- PMU, EE- PMU	During staff induction, followed by ongoing monthly monitoring

<sup>18</sup> These points need to be made clear to all staff on site before the subproject begins.

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		<p>opposed to ad hoc alternatives (e.g. fires for cooking, the use of surrounding bushes as a toilet facility);</p> <ul style="list-style-type: none"> <li>• no fires permitted on site;</li> <li>• trespassing on private/commercial properties adjoining the site is forbidden;</li> <li>• other than pre-approved security staff, no workers shall be permitted to live on the construction site; and</li> <li>• no worker may be forced to do work that is potentially dangerous or that he/she is not trained to do.</li> </ul>			
8.	Social impacts <sup>19</sup>	Open liaison channels shall be established between the contractors and interested and affected parties such that any queries, complaints or suggestions can be dealt with quickly and by the appropriate person(s).	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	Prior to moving onto site and ongoing monthly
		Road closure (if any) together with the proposed detour needs to be communicated via advertising, pamphlets, radio broadcasts, road signage, etc.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	Prior to moving onto site and ongoing monthly
		Advance road signage indicating the road detour and alternative routes (if required). Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	Prior to moving onto site and ongoing monthly
		Storage facilities and other temporary structures on site shall be located such that they have as little visual impact on local residents as possible.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During surveys and preliminary investigations and site set-up. Monthly monitoring

<sup>19</sup>It is important to take notice of the needs and wishes of those living or working adjacent to the site. Failure to do so can cause disruption to work.

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
9.	Conservation of the natural environment <sup>20</sup>	No vegetation may be cleared without prior permission from the Engineer.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During site setup and quarterly
		Trees that are not to be cleared shall be marked beforehand with danger tape. The PIU/ES-PMC /Engineer (DSC) must be given a chance to mark vegetation that is to be conserved before the Contractor begins clearing the site.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During site set-up and as per requirement
10	Set-up of waste management procedure	The excavation and use of rubbish pits on site is forbidden.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Monthly monitoring
		Burning of waste is forbidden.	E- DSC, Contractor	ES- PMC, EE- PMU	Monthly monitoring
11	Social and Cultural Resources	(i) Consult Archaeological Survey of India (ASI) or concerned dept. of Tripura Govt. to obtain an expert assessment of the archaeological potential of the site; (ii) Consider alternatives if the site is found to be of medium or high risk; (iii) Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During site set-up and ongoing quarterly
12	Core Labour Standard (CLS)- safety and compliance	Monitoring compliance with national labor laws and regulations, provided that these national laws are consistent with CLS. DSC will ensure that bidding and contract documents include specific provisions requiring contractors to comply with all: (i)	SO-PIU, E- DSC, Contractor	ES- PMC, ESMC-PMU, EE- PMU	During site set-up and ongoing quarterly

<sup>20</sup> Alien plant encroachment is particularly damaging to natural habitats and is often associated with disturbance to the soil during construction activities. Care must be taken to conserve existing plant and animal life on and surrounding the site.



Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		applicable labor laws and core labor standards on: (a) prohibition of child labor as defined in national legislation for construction and maintenance activities; (b) equal pay for equal work of equal value regardless of gender, ethnicity or caste; and (c) elimination of forced labor; and (ii) the requirement to disseminate information on sexually transmitted diseases including HIV/AIDS to employees and local communities surrounding the project sites.			
13	Occupational health & safety	Comply with IFC EHS Guidelines on Occupational Health and Safety- ref. <a href="http://www.ifc.org/ifcext/enviro.nsf/Content/Environmental%20Guidelines">www.ifc.org/ifcext/enviro.nsf/Content/Environmental Guidelines</a> )  Mitigation measures as mentioned during construction phase to be followed	Contractor	SO-PIU, ES- PMC, ESMC- PMU, EE- PMU	During site set-up and ongoing monthly.
14	Security and safety	Lighting on site is to be set out to provide maximum security and to enable easier policing of the site, without creating a visual nuisance to local residents or businesses.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	During site set-up and continued monthly
		Material stockpiles or stacks, such as, pipes must be stable and well secured to avoid collapse and possible injury to site workers / local residents.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Monthly
		Flammable materials shall be stored as far as possible from adjacent residents / businesses.	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Monthly
		All interested and affected parties shall be notified in advance of any known potential risks associated with the construction site and the activities on it. Examples are:	SO-PIU, E- DSC, Contractor	ES- PMC, EE- PMU	Week prior to activity and monthly to be continued

Sr. No.	Activity	Management/Mitigation	Responsible for Mitigation /	Responsible for Monitoring and supervision	Frequency
		<ul style="list-style-type: none"> <li>stringing of power lines</li> <li>earthworks / earthmoving machinery on steep slopes above houses / infrastructure</li> <li>risk to residences along haulage roads / access routes</li> </ul>			

ASI = Archeological Survey of India, BSPCB= Bihar State Pollution Control Board,

DSC: Design and Supervision Consultant, E: Engineer, EE: Environmental Engineer, ES: Environment Specialist, ESMC: Environment & Social Management Coordinator, PIU: Project Implementation unit, PMC: Project Management Consultant, PMU: Project Management Consultant, SO: Safeguard Officer

DSC: Design and Supervision Consultant, E: Engineer, EE: Environmental Engineer, ES: Environment Specialist, ESMC: Environment & Social Management Coordinator, PIU: Project Implementation unit, PMC: Project Management Consultant, PMU: Project Management Consultant, SO: Safeguard Officer

**Table 31: Generic EMP: Management of Construction and Workforce Activities- Construction phase**

	Issues	Management/Mitigation	Responsible for Mitigation	Responsible for Monitoring/ Supervision	Frequency
1	Climatic impact	<ul style="list-style-type: none"> <li>✓ Seasonal climatic variations will be considered during scheduling of construction activities in the area.</li> <li>✓ Consideration of suitable season (non monsoon /lien period) for major construction activity</li> <li>✓ Excavations and other clearing activities will only be done during agreed working times and permitted weather conditions.</li> <li>✓ Storm water control (through drainage, diversion) during construction phase as per the method approved by the Engineer.</li> </ul>	E- DSC, Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Quarterly monitoring
2.	Maintenance of construction camp and work site	The Contractor must monitor and manage drainage of the camp site to avoid standing water and soil erosion.	E- DSC, Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		Run-off from the camp site must not discharge into neighbors' properties.	E- DSC, Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE –	Weekly inspection

	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
				PMU	
		Toilets are to be maintained in a clean state and shall be moved to ensure that they adequately service the work areas.	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		Drinking water facility needs to be maintained at camp and work site	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		The Contractor is to ensure that open areas or the surrounding bushes are not being used as toilet facility.	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		The Contractor shall ensure that all litter is collected from the work and camp areas daily.	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		Bins shall be emptied regularly and waste shall be disposed of at the pre-approved site.	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		Eating areas shall be regularly serviced and cleaned to ensure the highest possible standards of hygiene and cleanliness.	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly inspection
		The Contractor shall ensure that his camp and working areas are kept clean at all times.	E- DSC, Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Weekly monitoring
3.	Staff conduct	The Contractor must monitor the performance of construction workers to ensure that the points relayed during their induction have been properly understood and are being followed.	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
		The rules that are explained in the worker conduct section, must be followed at all times	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
4.	Dust and air pollution <sup>21</sup>	Consult with DSC/PIU on the designated areas for stockpiling of clay, soils, gravel, and other construction materials	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.

<sup>21</sup> Main causes of air pollution during construction are dust from vehicle movements and stockpiles, vehicle emissions and fires.

	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		Damp down exposed soil and any stockpiled on site by spraying with water when necessary during dry weather	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
		Avoiding the need to stockpile on site	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
		Use tarpaulins to cover sand and other loose material when transported by trucks	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
		Fit all heavy equipment and machinery with air pollution control devices which are operating correctly and rregular servicing of the vehicles& equipments off site in order to limit gaseous emissions	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
		Excess earth and other windblown loads in transit will be kept covered	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring.
		No fires are allowed on site	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Ongoing monthly monitoring.
5	Noise Level	<ul style="list-style-type: none"> <li>➤ Plan activities in consultation with DSC/PIU so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance;</li> <li>➤ Require horns not be used unless it is necessary to warn other road users or animals of the vehicle's approach;</li> <li>➤ Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and portable street barriers the sound impact to surrounding sensitive receptor;</li> </ul>	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring

	Issues	Management/Mitigation	Responsible for Mitigation	Responsible for Monitoring/ Supervision	Frequency
		<ul style="list-style-type: none"> <li>➤ Ensure that machinery is in a good state of maintenance.</li> <li>➤ Monitor noise levels in potential problem areas, and</li> <li>➤ Maintain maximum sound levels not exceeding 80 decibels (dbA) when measured at a distance of 10 m or more from the vehicle/s.</li> </ul>			
6	Storm water	Earth, stone and rubble is to be properly disposed of so as not to obstruct natural water pathways over the site i.e. these materials must not be placed in storm water channels, drainage lines	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring
		During construction, un-channeled flow must be controlled to avoid soil erosion.	E- DSC, Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring
7	Water quality <sup>22</sup>	Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets	Contractor	SO-PIU/ES-PMC, EE –PMU	Regular monitoring - monthly
		Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with GMC/PIU on designated disposal areas	Contractor	SO-PIU/ES-PMC, EE –PMU	Regular monitoring - monthly
		Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies	Contractor	SO-PIU/ES-PMC, EE –PMU	Regular monitoring - monthly
		Proper discharge of waste water as generated during development of tube well	Contractor	SO-PIU/ES-PMC, EE –PMU	Regular monitoring - monthly
		Place storage areas for fuels and lubricants away from any drainage leading to water bodies	Contractor	SO-PIU/ES-PMC, EE –PMU	Regular monitoring - monthly

<sup>22</sup>Water quality is affected by the incorrect handling of substances and materials. Soil erosion and sediment is also detrimental to water quality. Mismanagement of polluted run-off from vehicle and plant washing and wind dispersal of dry materials into rivers and watercourses are detrimental to water quality.

	Issues	Management/Mitigation	Responsible for Mitigation	Responsible for Monitoring/ Supervision	Frequency
		Dispose any wastes generated by construction activities in designated sites	Contractor	SO-PIU/ES-PMC, EE –PMU	Regular monitoring - monthly
		Conduct surface quality inspection according to the Environmental Management Plan (EMP)	Contractor	SO-PIU/ES-PMC, EE –PMU	Quarterly monitoring
8.	Conservation of natural environment – terrestrial flora	As the work front progresses the Contractor is to check that vegetation clearing has the prior permission of the DSC/PIU Engineer and Environmental Specialist of PMC.	E- DSC, Contractor	SO-PIU/ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring
		Minimize removal of vegetation at water storage reservoir sites of Polytechnic and Sigrasthan and operator office at Dandibagh through modification of design	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring
		Require to plant three (3) native trees for every one (1) that is removed	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Monthly monitoring
		Prohibit employees from poaching wildlife, bird hunting, and cutting of trees for firewood	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Ongoing monitoring. Monthly monitoring
		Non removal of trees of religious importance	Contractor	SO-PIU/ ES-PMC, ESMC- PMU, EE – PMU	Quarterly monitoring.
9.	Materials management	Stockpiles shall not be situated such that they obstruct natural water pathways.	E- DSC, Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring. Location as directed by the engineer
		Stockpiles shall not exceed 2m in height unless otherwise permitted by the concerned Engineer.	E- DSC, Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring Location as directed by the engineer and ES- PMC
		All concrete mixing must take place on a designated, impermeable surface.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Verify suitability of all material sources and obtain approval of PIU & DSC	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
10	Existing Infrastructure and Facilities	<ul style="list-style-type: none"> <li>Utility shifting (if required) will be undertaken prior to commencing construction works.</li> <li>Keep construction related disturbances to</li> </ul>	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Quarterly monitoring

	Issues	Management/Mitigation	Responsible for Mitigation	Responsible for Monitoring/ Supervision	Frequency
		<p>a minimum.</p> <ul style="list-style-type: none"> <li>• Consult with affected service providers regarding impacts on access to infrastructure and services and alternatives.</li> <li>• Consult with affected communities or businesses prior to foreseeable disruptions, for example notifying residents of a temporary interruption of water supply.</li> <li>• Provide backup or alternative services during construction-related disruptions,</li> <li>• Provide access points to infrastructure and services.</li> <li>• Monitor complaints by the public</li> </ul>			
11.	Landscape and Aesthetics including Waste management	Refuse must be placed in the designated skips / bins which must be regularly emptied.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Prepare and implement Waste Management Plan	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		In addition to the waste facilities within the construction camp, provision must be made for waste receptacles to be placed at intervals along the work front.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		Littering on site is forbidden and the site shall be cleared of litter at the end of each working day.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		Disposal arrangement of muck as generated from tube well construction	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas for improvement of aesthetic environment. Recycling is to be encouraged by providing separate receptacles for different types of wastes (including demolition waste) and making sure that staff is aware of their uses.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring

	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		All waste must be removed from the site and transported to a disposal site or as directed by the Engineer.	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Waste from toilets shall be disposed of regularly and in a responsible manner.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Weekly monitoring.
		Hazardous waste disposal must be carried out by the Contractor in a responsible manner	E- DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Storage areas will be properly fenced off	E- DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Top soil needs to be utilised by farmers for nutrient value	E- DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Coordinate with DSC-PIU for beneficial uses of excess excavated soils or immediately dispose to designated areas	E- DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Recover used oil and lubricants and reuse or remove from the sites	E- DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
		Request DSC/PIU to report in writing that the necessary environmental restoration work has been adequately performed before acceptance of work	E- DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
12	Occupational Health and Safety	World bank Environmental, Health, and Safety (EHS) Guidelines - EHS Guidelines for water & sanitation will be followed. Specifically,  (i) Develop and implement site-specific Health and Safety (H and S) Plan which will include measures such as: (a) excluding public from the site; (b) ensuring all workers are provided with and use Personal Protective Equipment like helmet, gumboot, safety belt, gloves, nose musk and ear plugs; (c) H and S Training for all site personnel; (d) documented procedures to be followed for all site activities; and (e) documentation of work-related accidents; (ii) Ensure that qualified first-aid can be provided at all times. Equipped first-aid	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly



	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		<p>stations shall be easily accessible throughout the site;</p> <p>(iii) Provide medical insurance coverage for workers;</p> <p>(iv) Secure all installations from unauthorized intrusion and accident risks;</p> <p>(v) Provide supplies of potable drinking water;</p> <p>(vi) Provide clean eating areas where workers are not exposed to hazardous or noxious substances;</p> <p>(vii) Provide H and S orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;</p> <p>(viii) Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;</p> <p>(ix) Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;</p> <p>(x) Ensure moving equipment is outfitted with audible back-up alarms;</p> <p>(xi) Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate; and</p> <p>(xii) Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing</p>			

	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		protection. The use of hearing protection shall be enforced actively.			
13	Community Health & Safety	Plan routes to avoid times of peak-pedestrian activities.	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly
		Liaise with DSC- PIU in identifying risk areas on route cards/maps	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly
		Maintain regularly the vehicles and use of manufacturer-approved parts to minimize potentially serious accidents caused by equipment malfunction or premature failure.	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly
		Provide road signs and flag persons to warn of dangerous conditions, in case of location near the road.	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly
		Provide protective fencing around open trenches, and cover any open trench with metal planks during non-construction hours	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly
		Maintaining accident register and arrangement of emergency response plan for community	E-DSC Contractor and	PIU/ES-PMC, ESMC-PMU, EE –PMU	Ongoing Weekly
14	Traffic accessibility & impact	Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites; Schedule transport and hauling activities during non-peak hours; Locate entry and exit points in areas where there is low potential for traffic congestion; Keep the site free from all unnecessary obstructions; Drive vehicles in a considerate manner; Coordinate with Govt. Traffic Department for temporary road diversions and with for provision of traffic aids if transportation	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring

	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		activities cannot be avoided during peak hours; and Notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints			
15	Social impacts <sup>23</sup>	Contractor's activities and movement of staff to be restricted to designated construction areas.	PIU, Contractor	PIU/ ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		The conduct of the construction staff when dealing with the public or other stakeholders shall be in a manner that is polite and courteous at all times.	PIU, Contractor	PIU/ ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		Disruption of access for local residents, commercial establishments, institutions, etc. must be minimized and must have the Engineer's permissions.	PIU, Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		The work plan for the construction and laying of pipelines will be devised in such a way to ensure that the construction period is minimized. Affected persons will be assisted in moving to the other side of the road and returning after construction work is completed. Where they are not required to shift, their access road will be ensured by the contractor. The construction period will be minimized and is estimated to be less than 30 days per section of work. Compensation will be provided to impacted person (all deals under Resettlement Plant)	PIU, Contractor	PIU/ ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		Provide walkways and metal sheets where required to maintain access for people and vehicles.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		Increase workforce in front of critical areas	Contractor	PIU/ES-PMC, ESMC-	Monthly monitoring

<sup>23</sup> Regular communication between the Contractor and the interested and affected parties is important for the duration of the contract.

	<b>Issues</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		such as educational institutions, places of worship, business establishment and health care establishments to shorten the duration of impacts.		PMU, EE –PMU	
		Consult businesses and institutions regarding operating hours and factoring this in work schedules.	PIU, Contractor	PIU/ES-PMC, EE – PMU	At least 1 week prior to the activity taking place. Monthly monitoring
		The Contractor is to inform neighbors in writing of disruptive activities at least a week beforehand.	PIU, Contractor	PIU/ES-PMC, EE – PMU	At least a week prior to the activity taking place. Monthly monitoring
		Lighting on the construction site shall be pointed downwards and away from oncoming traffic and nearby houses.	Contractor	PIU/ES-PMC, EE – PMU	Monthly
		The site must be kept clean to minimize the visual impact of the site.	Contractor	PIU/ES-PMC, EE – PMU	Weekly monitoring.
		Machinery and vehicles are to be kept in good working order for the duration of the project to minimize noise nuisance to neighbors.	Contractor	PIU/ES-PMC, EE – PMU	Monthly monitoring.
		Notice of particularly noisy activities must be given to residents / businesses adjacent to the construction site. Examples of these include: <ul style="list-style-type: none"> <li>• noise generated by jackhammers, diesel generator sets, excavators, etc.</li> <li>• drilling</li> <li>• dewatering pumps</li> </ul>	PIU, Contractor	PIU/ES-PMC, EE – PMU	Monthly monitoring
		A complaints register (refer to the Grievance Redressal Mechanism) shall be housed at the site office.	E- DSC, Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring.
16	Cultural environment	All the staff and labourers of the Contractor be informed about the possible items of historical or archaeological value	E- DSC, ES- PMC, contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring
		If something of this nature be uncovered, ASI or State Department of Archaeology shall be contacted and work shall be stopped	E- DSC, ES- PMC, Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Monthly monitoring

	Issues	Management/Mitigation	Responsible for Mitigation	Responsible for Monitoring/ Supervision	Frequency
		immediately.			
17	Environment Safeguard/safety Officer	Contractor shall appoint one Environment Safeguard/ Safety Officer who shall be responsible for assisting contractor in implementation of EMP, community liaison, consultations with interested/affected parties, reporting and grievance redressal on day-to-day basis.	Contractor	PIU/ES-PMC, ESMC-PMU, EE –PMU	Person to be appointed before start of construction activities and remain available throughout the project duration.

**Monitoring method- Through field check, document check, visual observation, generation of air, water & noise level data**

ASI = Archeological Survey of India, BSPCB= Bihar State Pollution Control Board,

DSC: Design and Supervision Consultant, E: Engineer, EE: Environmental Engineer, ES: Environment Specialist, ESMC: Environment & Social Management Coordinator, PIU: Project Implementation unit, PMC: Project Management Consultant, PMU: Project Management Consultant, SO: Safeguard Officer

**Table-32: Generic EMP- Post Construction Activities and Operation**

	Activities	Management/Mitigation	Responsible for Mitigation	Responsible for Monitoring/ Supervision	Frequency
1.	Construction camp	All structures comprising the construction camp are to be removed from site or handed over to the property owner/ community as per mutual agreement (if established on private/community land).	Contractor	SO - PIU, ES-PMC, EE –PMU	Subproject completion
		The area that previously housed the construction camp is to be checked for spills of substances such as oil, paint, etc. and these shall be cleaned up.	Contractor	SO - PIU, ES-PMC, EE –PMU	Subproject completion
		The Contractor must arrange the cancellation of all temporary services.	Contractor	SO - PIU, ES-PMC, EE –PMU	Subproject completion
2.	Vegetation	All areas that have been disturbed by construction activities (including the construction camp area) must be cleared of alien vegetation.	Contractor	SO - PIU, ES-PMC, EE –PMU	Subproject completion
		All vegetation that has been cleared during construction is to be removed from site or used as much as per the re-vegetation specification	Contractor	SO - PIU, ES-PMC, EE –PMU	Subproject completion
		The Contractor is to water and maintain all planted vegetation until the end of the defects liability period and is to submit a method statement regarding this to the Engineer.	Contractor	SO - PIU, ES-PMC, EE –PMU	Subproject completion

	<b>Activities</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
3.	Land rehabilitation	All surfaces hardened due to construction activities are to be ripped and imported materials thereon removed.	Contractor	SO - PIU, ES-PMC, ESMC-PMU	Subproject completion
		All rubble is to be removed from the site to an approved disposal site. Burying of rubble on site is prohibited.	Contractor	SO - PIU, ES-PMC, ESMC-PMU	Subproject completion
		The site is to be cleared of all litter.	Contractor	SO - PIU, ES-PMC, ESMC-PMU	Subproject completion
		Surfaces are to be checked for waste products from activities such as concreting or asphaltting and cleared in a manner approved by the Engineer.	Contractor	SO - PIU, ES-PMC, ESMC-PMU	Subproject completion
		The Contractor is to check that all watercourses are free from building rubble, spoil materials and waste materials.	Contractor	SO - PIU, ES-PMC, ESMC-PMU	Subproject completion
4.	Materials and infrastructure	Fences, barriers and demarcations associated with the construction phase are to be removed from the site unless stipulated otherwise by the Engineer.	Engineer- DSC, Contractor	SO - PIU, ES-PMC, EE -PMU	Subproject completion
		All residual stockpiles must be removed to spoil or spread on site as directed by the Engineer.	Engineer- DSC, Contractor	SO - PIU, ES-PMC, EE -PMU	Subproject completion
		All leftover building materials must be returned to the depot or removed from the site.	Contractor	SO - PIU, ES-PMC, EE -PMU	Subproject completion
		The Contractor must repair any damage that the construction work has caused to neighboring properties.	Contractor	SO-PIU, ES-PMC	As directed by the Engineer.
5.	General	A meeting is to be held on site between the Engineer, ES- PMC and the Contractor to approve all remediation activities and to ensure that the site has been restored to a condition approved by the Engineer.	Engineer- DSC, SO-PIU, ES- PMC, Contractor	PIU, ES-PMC, ESMC- PMU	On completion of the construction and maintenance phases
		Temporary roads must be closed and access across these blocked.	Engineer- DSC, SO-PIU, ES- PMC, Contractor	SO - PIU, ES-PMC, EE -PMU	On completion of construction
		Access or haulage roads that were built across watercourses must be rehabilitated by removing temporary bridges and any other materials placed in/or near to watercourses.	Engineer- DSC and Contractor	SO - PIU, ES-PMC, EE -PMU	On completion of construction

	<b>Activities</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
		All areas where temporary services were installed are to be rehabilitated to the satisfaction of the Engineer	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	On completion of construction
		Mitigated during design- pre construction phase	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	On completion of construction
		Continuous monitoring water level and quality through observation well	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	On completion of construction
		Prohibit sand mining in designated zones around wells.	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	On completion of construction
6	Aesthetics, Landscape character and Sense of Place	The new Tube well proposed to be constructed under this subproject will be similar in construction and design to existing Tube well in and around Monitor housekeeping, littering and illegal dumping.	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	On completion of construction
7	Hazards waste management	Store of common salt, dry, and dark conditions for no more than one month	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	During Operation
		Use equipment constructed of corrosion-resistant materials	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	During Operation
		Minimize the amount of disinfection materials for using in chlorinator	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	During Operation
		Maintaining material safety data sheet	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	During Operation
		Develop and implement a prevention program that includes identification of potential hazards, written operating procedures, training, maintenance, and accident investigation procedures	Engineer- DSC and Contractor	SO – PIU, ES-PMC, EE –PMU	During Operation
8	Water quality assessment and maintained – Health & safety	<ul style="list-style-type: none"> <li>Undertake regular monitoring and maintenance of water supply infrastructure.</li> <li>Quality of drinking water will be checked regularly at tube well locations and water storage sites</li> <li>Sewage water will be treated in STP (which is under design stage) before discharge.</li> </ul>	Contractor, SO- PIU	ES-PMC, EE – PMU	During Operation
9	Sustainable water source – Both	<ul style="list-style-type: none"> <li>Monitoring of water abstraction from Phalgu aquifer</li> </ul>	Contractor, SO- PIU	ES-PMC, EE – PMU	During Operation

	<b>Activities</b>	<b>Management/Mitigation</b>	<b>Responsible for Mitigation</b>	<b>Responsible for Monitoring/ Supervision</b>	<b>Frequency</b>
	quantity and quality aspects	<ul style="list-style-type: none"> <li>○ Monitoring of water level in the aquifer: install a number of observation wells: inside the aquifer, some 40m from the river edge. PMC to propose suitable locations. Construction to be included in GWSP2 contract.</li> <li>○ Monitoring water abstraction by production tube wells.</li> <li>○ Regular analysis of correlations between above 2 points</li> <li>○ Monitoring to be carried out by GWSP2 contractor (as part of his Operation task)</li> <li>● Monitoring of water quality of the source / Phalgu aquifer:</li> </ul>			

ASI = Archeological Survey of India, BSPCB= Bihar State Pollution Control Board,  
DSC: Design and Supervision Consultant, E: Engineer, EE: Environmental Engineer, ES: Environment Specialist, ESMC: Environment & Social Management Coordinator, PIU: Project Implementation unit, PMC: Project Management Consultant, PMU: Project Management Consultant, SO: Safeguard Officer



### C. Environmental Monitoring Program

290. **Table 33** outlines the environmental monitoring program to ensure implementation of the management and mitigation measures specified in the EMP. The table shall be read within the context of the body of the entire EMP.

**Table 33: Environmental Monitoring Program**

Aspect	Parameter	Standards	Location	Duration / frequency	Implementation	Monitoring & Supervision
<b>1. Site establishment and preliminary activities</b>						
Legislation, permits and agreements	Consent for Establishment and Consent to Operate (in relation to hot mixing, wet mixing, batching plant, stone crushers, and diesel generators, etc. if any)	Air Act Water Act Noise Act	-	Prior to moving onto site and during construction	Contractor, PIU	Engineer of DSC / ESMC-PMU/EE-PMU/ ES-PMC
	Forest land clearance, NOC from forest Dep.	Forest Act	-	Prior to moving onto site and during construction	Contractor, PIU	Engineer of DSC / ESMC-PMU/EE-PMU/ ES-PMC
	Copy of EMP	EARF and ADB SPS	Subproject site, offices, website, library, etc.	At all times	Contractor, Engineer of DSC & SO- PIU	ESMC- PMU/ EE- PMU/ ES-PMC
Access to site	Existing conditions	EMP	All access and haul roads	Prior to moving onto site	Contractor, Engineer of DSC & SO- PIU and ES- PMC	ES- PMC /EE- PMU
	Road closures and traffic rerouting if required	EMP	All affected roads	One week in advance of the activity	Contractor, Engineer of DSC & SO- PIU	ESMC- PMU/ EE- PMU/ ES-PMC
	Notifications and road signages	EMP	All affected roads	One week in advance of the activity	Contractor, Engineer of DSC & SO- PIU	ESMC- PMU/ EE- PMU/ ES-PMC
Construction camp	Approval of location and facilities	EMP	As identified	Prior to moving onto site	Contractor, Engineer of DSC & SO- PIU	ESMC- PMU/ EE- PMU/ ES-PMC
Equipment lay-down and storage area	Approval of location and facilities	EMP	As identified	Prior to moving onto site and during site set-up	Contractor, Engineer of DSC & SO- PIU	ESMC- PMU/ EE- PMU/ ES-PMC
Materials management – sourcing	Approval of sources and suppliers	EMP	As identified	Prior to procurement of materials	Contractor, Engineer of DSC & SO- PIU	EE- PMU/ ES-PMC
Education of site staff	Awareness level training - Environment - Health and safety	EMP and records	-	During staff induction, followed by schedule as	Contractor, ES-PMC	ESMC- PMU/ EE- PMU/ ES-PMC

Aspect	Parameter	Standards	Location	Duration / frequency	Implementation	Monitoring & Supervision
				determined		
Social impacts	Public consultations, information disclosure, communication strategy	EARF, ADB SPS and EMP	Subproject site	Prior to moving onto site and ongoing	Contractor, Engineer of DSC & SO- PIU	ESMC- PMU/ EE- PMU/ ES- PMC
	GRM register	EMP	Subproject site	Prior to moving onto site and ongoing	Contractor, SO- PIU	ESMC- PMU/ ES- PMC
Noise quality	Baseline data for noise level in dB(A) $L_{eq}$	National noise standards	Once before start of construction works at all the project locations as identified by ES- PMC	Once prior to site set-up	Contractor with the help of National Accreditation Board for Testing and Calibration Laboratories	SO- PIU, EE- PMU/ ES- PMC
Air quality	Baseline ambient data for particulate matters 10 and 2.5 ( $PM_{10}$ , $PM_{2.5}$ ), sulfur dioxide ( $SO_2$ ), nitrogen dioxide ( $NO_2$ )	National ambient air quality standards	Once before start of construction works at all the project locations as identified by ES- PMC	Once prior to site set-up	Contractor with the help of National Accreditation Board for Testing and Calibration Laboratories	SO- PIU, EE- PMU/ ES- PMC
Storm water	Storm water management measures	EMP	As identified by the engineer	During site set-up and throughout the duration of the subproject-monthly	SO-PIU,EE- PMU/ ES- PMC	EE- PMU/ ES- PMC
Conservation of natural environment	Existing conditions	EMP	Subproject sites	Prior to site set-up-then monthly	Contractor & ES- PMC	ESMC- PMU/ EE- PMU/ ES- PMC
Waste management procedure	Disposal sites	EMP	As determined	Prior to site set-up and ongoing throughout the subproject-monthly	Contractor, ES- PMC	EE- PMU/ ES- PMC
Cultural environment	Chance finds	ASI Act and EMP	As determined	Prior to site set-up and ongoing throughout the subproject-monthly	Contractor with Engineer- DSC & SO-PIU	EE- PMU/ ES- PMC
Security & safety arrangement	Arrangement at working sites	EMP	Subproject sites	Prior to site set-up and ongoing throughout the subproject	Contractor with Engineer- DSC & SO-PIU	EE- PMU/ ES- PMC
Occupational Health &	Compliance with IFC & EHS Guidelines of	EMP, Guidelines	Subproject sites	Prior to site set-up and	Contractor with Engineer- DSC	EE- PMU/ ES- PMC

Aspect	Parameter	Standards	Location	Duration / frequency	Implementation	Monitoring & Supervision
safety	World Bank			ongoing throughout the subproject	&SO-PIU	
<b>2. Construction phase</b>						
Access to site	Qualitative characteristics	Pre-subproject condition and EMP	All access and haul roads	Refer to EMP (table on management of construction and workforce activities)	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Construction camp	Qualitative characteristics	Pre-subproject condition and EMP	Camp site	Prior to site set-up and ongoing throughout the subproject-weekly monitoring	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Staff conduct	Site records (accidents, complaints)	EMP	Subproject sites	Ongoing-monthly monitoring	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Air quality	PM <sub>10</sub> , PM <sub>2.5</sub> , SO <sub>2</sub> , NO <sub>2</sub>	National ambient air quality standards	Covering at all the project locations as identified by Engineer.	Once in every six months at water reservoir sites, pipe laying areas, tube well locations, operator office during subproject execution	Contractor with the help of National Accreditation Board for Testing and Calibration Laboratories	EE- PMU/ SO-PIU/ ES- PMC
Storm water	Soil erosion management measures	EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Water quality	Protection from contamination	EMP, Water quality standard	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Conservation of natural resources	Vegetation conditions	EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Materials management	Qualitative characteristics	EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Landscape and Aesthetics including Waste management	Qualitative characteristics	EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO-PIU/ ES- PMC
	Disposal manifests	EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO-PIU/ ES- PMC
Social impacts	Public consultations, information	EARF, ADB SPS and	Subproject sites	Ongoing-monthly	Contractor with the Engineer,	EE- PMU/ ES- PMC

Aspect	Parameter	Standards	Location	Duration / frequency	Implementation	Monitoring & Supervision
	disclosure, communication strategy	EMP			DSC ,SO- PIU	
	GRM register	EMP	Subproject sites	Ongoing-monthly	Contractor with the Engineer, DSC, SO- PIU	EE- PMU/ ES- PMC
Occupational Health and Safety	World bank Environmental, Health, and Safety (EHS) Guidelines	EMP	Subproject sites	Ongoing-weekly	Contractor with the Engineer, DSC, SO- PIU	EE- PMU/ ES- PMC
Cultural environment	Chance finds	ASI Act and EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO- PIU/ ES- PMC
Noise quality	Noise level in dB(A) $L_{eq}$	National noise standards	Covering at all the project locations as identified by Engineer.	Once in every six months at water reservoir sites, pipe laying areas, operator office during subproject execution	Contractor with the help of National Accreditation Board for Testing and Calibration Laboratories	EE- PMU/ SO- PIU/ ES- PMC
Community Health & Safety	Safety arrangement during construction	EMP	Subproject sites	Ongoing-weekly	Contractor	EE- PMU/ SO- PIU/ ES- PMC
Traffic accessibility impact	Arrangement and follow up rules related to traffic safety	EMP	Subproject sites	Ongoing-monthly	Contractor	EE- PMU/ SO- PIU/ ES- PMC
<b>3. Post-construction activities</b>						
Construction camp	Pre-existing conditions	EMP	Construction camp	Subproject completion	Contractor	EE- PMU/ ES- PMC
Vegetation (if felled)	Pre-existing conditions	EMP	Subproject sites	Subproject completion	Contractor	EE- PMU/ ES- PMC
Land rehabilitation	Pre-existing conditions	EMP	Subproject sites	Subproject completion	Contractor	ESMC- PMU/ EE- PMU/ ES- PMC
Materials and infrastructure	Pre-existing conditions	EMP	Subproject sites	Subproject completion	Contractor	EE- PMU/ ES- PMC
General	Records	EMP	Subproject sites	Subproject completion	Contractor with Engineer- DSC &SO- PIU and ES-PMC	ESMC- PMU/ EE- PMU/ ES- PMC
Social and Cultural Resources	Pubic complaint	EMP	Subproject sites	During operation	Contractor	EE- PMU/ ES- PMC
<b>4. Operation and maintenance (defect liability period)</b>						
Water Quality	As per national standard	Central Pollution Control Board standards	At reservoirs and tube well locations	Once in 6 months	Contractor with the help of National Accreditation Board for Testing and Calibration Laboratories	ESMC- PMU/ EE- PMU/ ES- PMC
Noise quality	Noise level in dB(A)	As per	Once at all	Once in 6	Contractor with	ESMC- PMU/

Aspect	Parameter	Standards	Location	Duration / frequency	Implementation	Monitoring & Supervision
	L <sub>eq</sub>	national noise standards	tube well pumping areas	months	the help of National Accreditation Board for Testing and Calibration Laboratories	EE- PMU/ ES- PMC
Hazardous chemical & waste management	Storage and use	Safety data sheet EMP	At tube well water treatment site	Monthly monitoring	Contractor	ESMC- PMU/ EE- PMU/ ES- PMC

DSC: Design and Supervision Consultant, E: Engineer, EE: Environmental Engineer, ES: Environment Specialist, ESMC: Environment & Social Management Coordinator, PIU: Project Implementation unit, PMC: Project Management Consultant, PMU: Project Management Consultant, SO: Safeguard Officer

**Note: PIU & contractor: Daily & weekly mitigation, monitoring and ES- PMC, EE- PMU, ESMC- PMU: Fortnightly, Monthly & Quarterly monitoring or as per requirement & overall supervision**

#### D. Environmental Management and Monitoring Cost

291. The Contractor's cost for site establishment, preliminary activities, construction, and defect liability activities will be incorporated into the contractual agreements, which will be binding on him for implementation. The air quality and noise level monitoring at construction phase and water quality (tube well water) at defect liability phase will be conducted by the contractor.

292. The operation phase mitigation measures are again of good operating practices, which will be the responsibility of implementing agency (BUIDCo) with the help of program Consultant. The water quality monitoring during the operation and maintenance phase will be conducted by the hired recognized environmental laboratory.

293. The activities identified in environmental monitoring program mainly includes site inspections and informal discussions with workers and local people and this will be the responsibility of PMU and PMC with the assistance of DSC's Engineer, costs of which are part of project management.

294. **Table 34** presents the estimated cost to implement the EMP.

**Table 34: Indicative Cost for EMP Implementation**

Component	Description	Number	Cost per Unit (INR)	Cost (INR)	Source of Funds
Legislation, Permits and Agreements	Consent to Establish and Consent to Operate for plants and machinery of the contractor.	As required	Not Applicable	Not Applicable	These consents are to be obtained by contractor on his own cost.
Public consultations and information disclosure	Information disclosure and consultations during preconstruction and construction phase.	As required	Lump sum	50,000	Project Cost- PMU
Forest land acquisition at Singrasthan and	Acquisition of forest land for construction of water reservoir	As per project requirement	Lump sum for all activities	3,00,000	Project Cost- PMU

Component	Description	Number	Cost per Unit (INR)	Cost (INR)	Source of Funds
NOC from forest dept. for tree cutting and temporary impact	and laying of transmission pipeline. Trees need to compensate against each tree cutting				
Providing access to commercial establishments and properties.	Providing access, in case of access disruptions, to affected properties.	As per requirement	Contractor's liability	Not applicable	Covered under engineering cost
Dust Suppression at subproject sites	Application of dust suppression measures during construction phase.	As required	Lump sum	1,00,000	Covered under engineering design and cost – by contractor
Traffic management	Safety Signboards, delineators, traffic regulation equipments, flagman, temporary diversions, etc	Wherever required throughout subproject corridor	Contractor's liability	Not applicable	Covered in engineering cost
<b>Baseline Monitoring</b> Site preparation and preliminary activities					
Air	Once before start of construction work at water reservoir locations, operator office location, tube well and pipe laying locations as identified by Engineer of DSC & Environmental Specialist of PMC	Approx. 25 samples	10,000 per sample	2,50,000	Covered under engineering design and cost- by contractor
Noise	Once before start of construction work at water reservoir locations, operator office location, tube well and pipe laying locations as identified by Engineer of DSC & Environmental Specialist of PMC	Approx. 25 samples	1500 per sample	37,500	Covered under engineering design and cost- by contractor
<b>Construction Monitoring</b>					
Air	Once in six months during construction works at both the water reservoir locations, operator office, few tube wells and pipe laying locations as identified by Engineer of DSC	Approx. 35 samples	10,000 per sample	3,50,000	Covered under engineering design and cost- by contractor

Component	Description	Number	Cost per Unit (INR)	per	Cost (INR)	Source of Funds
	& Environmental Specialist of PMC					
Noise	Once in six months during construction works at both the water reservoir locations, operator office, few tube wells and pipe laying locations as identified by Engineer of DSC & Environmental Specialist of PMC	Approx. 30 samples	1500	per sample	45,000	Covered under engineering design and cost- by contractor
Water	Once in six months during construction nearby water source	Approx 20 samples	10,000	per sample	200,000	Covered under engineering design and cost- by contractor
<b>Defect Liability Period</b>						
Water Quality	At constructed water storage reservoirs, operator office and selected tube well locations, as per drinking water standard parameters	Approx. 30 numbers	12,000	per sample	3,60,000	Covered under O & M cost – by contractor
Noise quality	Once in six months during the defect liability period at selected tube well locations, operator office	Approx. 20 samples	1500	per sample	30,000	Covered under O & M cost – by contractor
Water level monitoring at observation well and production well	Continuous	Lump sum Yearly			8,00,000	Covered under O & M cost – by contractor
Any unanticipated impact due to subproject implementation	Mitigation of any unanticipated impact arising during construction phase and defect liability period.	Lump sum	-		3,00,000	Project cost
<b>TOTAL (INR)</b>					<b>28,22,500</b>	
			<b>TOTAL (USD)</b>		<b>43,423</b>	

## E. Monitoring and Reporting

295. Prior to commencement of any civil work, the contractor will submit a compliance report to PMU/PMC/PIU ensuring that all identified pre-construction environmental impact

mitigation measures as detailed in the EMP will be undertaken. PMC will review the report and thereafter PMU will allow commencement of civil works.

296. PMC will organize an induction course for the training of contractors preparing them on:

- (i). EMP/approved Site Specific EMP implementation including environmental monitoring requirements related to identified mitigation measures; and
- (ii). taking immediate actions to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation.

297. During the construction phase, results from internal monitoring by the contractor will be reflected in their monthly EMP implementation reports to the PMC. These monthly report will be retained in PMC / PIU office for reference.

298. Monthly report will be prepared by PMC summarizing compliance with monitoring requirements, details on any noncompliance, remedial actions taken and additional environmental mitigation measures if necessary.

299. Environmental monitoring activities involving measurements will require engagement of external agencies and will be organized by contractor. Based on monthly reports and measurements, PMC will draft a 6-monthly EMP implementation report.

300. The PMU will review, approve and submit to ADB the 6 monthly (semi annual) EMP implementation progress report. Once concurrence from the ADB is received the report will be uploaded in the Project website.

301. Based on review of environmental monitoring results, future modifications in the EMP could be undertaken with the concurrence of the ADB. These will be generally undertaken, if required, upon review of the 6-monthly EMP progress reports submitted by the PMU to ADB following agreed procedures and mechanisms.

302. For Projects likely to have anticipated adverse environmental impacts during operation, monitoring may continue at the minimum on an annual basis during the operation phase. Monitoring reports will be posted in a location accessible to the public.

## **VIII. RECOMMENDATIONS AND CONCLUSIONS**

303. The process described in this document has assessed the environmental impacts of all elements of the proposed subproject for improvement of water supply system in Gaya City. Potential negative impacts were identified in relation to pre-, construction and operation of the improved infrastructure, but no environmental impacts were identified as being due to either the subproject design or location. Mitigation measures have been developed to reduce all negative impacts to acceptable levels. These were discussed with specialists responsible for the engineering aspects, and as a result some measures have already been included in the designs for the infrastructure. This means that the number of impacts and their significance has already been reduced by amending the design.

304. The public participation processes undertaken during project design ensured stakeholders are engaged during the preparation of the IEE. The planned information



disclosure measures and process for carrying out consultation with affected people will facilitate their participation during project implementation.

305. The subproject's Grievance Redressal Mechanism will provide the citizens with a platform for redressal of their grievances and describes the informal and formal channels, time frame and mechanisms for resolving complaints about environmental performance.

306. The EMP will guide the environmentally-sound construction of the subproject and ensure efficient lines of communication between the DSC (Engineer), contractors, PIU and PMU/PMC. The EMP will (i) ensure that the activities are undertaken in a responsible non-detrimental manner; (ii) provide a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site; (iii) guide and control the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iv) detail specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (v) ensure that safety recommendations are complied with.

307. A copy of the EMP will be kept on site during the construction period at all times. The EMP will be made binding on all contractors operating on the site and will be included within the Contractual Clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance.

308. The subproject is unlikely to cause significant adverse impacts. The potential adverse impacts that are associated with design, construction, and operation can be mitigated to standard levels without difficulty through proper engineering design and the incorporation or application of recommended mitigation measures and procedures.

309. Therefore, as per ADB SPS, the subproject is classified as Environmental Category B and does not require further Environmental Impact Assessment.

## Appendix 1 Rapid Environmental Assessment (REA) Checklist

**Instructions:**

- (i) The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to the Environment and Safeguards Division (RSES) for endorsement by the Director, RSES and for approval by the Chief Compliance Officer.
- (ii) This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB's (a) checklists on involuntary resettlement and Indigenous Peoples; (b) poverty reduction handbook; (c) staff guide to consultation and participation; and (d) gender checklists.
- (iii) Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. Use the "remarks" section to discuss any anticipated mitigation measures.

**Country/Project title:** India/ Bihar Urban Development Project

**Sector division:** Water Supply- Gaya phase 2, GWSP2

Screening questions	Yes	No	Remarks
a. Project siting Is the project area			
▪ Densely populated?	√		Gaya is densely populated
▪ Heavy with development activities?		√	No such heavy development activity is noted at Gaya
▪ Adjacent to or within any environmentally sensitive areas?	√		Gaya is a historic and a most important religious centre for Hindus. History of Gaya has a unique place in the evolution and development of Hindu civilization. According to the religion of Puranaas, it is incumbent on every Hindu to visit Gaya and make offerings for the souls of his ancestors. There are a number of temples in the town; a large number of pilgrims visit the town. Vishnupad Temple, Brahmyoni Hill and Ramshila Hill are the environmentally sensitive areas (State Archeological notified area) located nearby the project area
• Cultural heritage site		√	World famous Buddhist centre of Bodh Gaya is located 13 km of Gaya. In 2002, Mahabodhi Temple, located in Bodh Gaya, became a UNESCO World Heritage Site.

Screening questions	Yes	No	Remarks
<ul style="list-style-type: none"> <li>Protected area</li> </ul>	√		<p>Protected area <b>Gautam Budha Wildlife Sanctuary</b> located at a distance of 50 km south of Gaya.</p> <p>Forest area is involved for construction of new reservoir at Singrasthan</p> <p>No archeological protected area nearby the project location</p>
<ul style="list-style-type: none"> <li>Wetland</li> </ul>		√	Not applicable
<ul style="list-style-type: none"> <li>Mangrove</li> </ul>		√	Not applicable
<ul style="list-style-type: none"> <li>Estuarine</li> </ul>		√	Not applicable
<ul style="list-style-type: none"> <li>Buffer zone of protected area</li> </ul>		√	None of the subproject component sites are within buffer zone of protected area.
<ul style="list-style-type: none"> <li>Special area for protecting biodiversity</li> </ul>		√	None of the subproject component sites are in special area for protecting biodiversity.
<ul style="list-style-type: none"> <li>Bay</li> </ul>		√	Not applicable
<b>b.</b> Potential environmental impacts will the project cause...			
<ul style="list-style-type: none"> <li>Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?</li> </ul>		√	No such impact is anticipated. The water source for tube wells is underground water in deep water aquifers. Exploitation of surface water sources is not in the scope of the subproject.
<ul style="list-style-type: none"> <li>Impairment of historical/cultural monuments/areas and loss/damage to these sites?</li> </ul>		√	There will be no impact on the cultural monuments as the proposed project will include construction of new tube well, laying of transmission pipeline
<ul style="list-style-type: none"> <li>Hazard of land subsidence caused by excessive ground water pumping?</li> </ul>		√	Sufficient ground water is available at Gaya. No such impact is anticipated
<ul style="list-style-type: none"> <li>Social conflicts arising from displacement of communities?</li> </ul>		√	No such impact is anticipated. R & R plan prepared separately
<ul style="list-style-type: none"> <li>Conflicts in abstraction of raw water for water supply with other beneficial water uses for surface and ground waters?</li> </ul>		√	No such conflicts are anticipated. Abstraction of surface water for distribution is not proposed under this subproject. The ground water is not being tapped for any other purpose except drinking in the project area.

Screening questions	Yes	No	Remarks
<ul style="list-style-type: none"> <li>Unsatisfactory raw water supply (e.g. excessive pathogens or mineral constituents)?</li> </ul>		√	Ground water obtained from the tube wells is normally free from pathogens and will be supplied after disinfection. Regular water quality monitoring is carried out by the line department (PHED) to minimize threat to public health. Further, the tube wells will be deep and sufficiently away from any possible source of ground water contamination.
<ul style="list-style-type: none"> <li>Delivery of unsafe water to distribution system?</li> </ul>		√	Ground water will be treated before delivery Moreover regular monitoring of water distribution will be done so the delivery of unsafe water will be unexpected
<ul style="list-style-type: none"> <li>Inadequate protection of intake works or wells, leading to pollution of water supply?</li> </ul>		√	No such situation is anticipated. As per proposed project water will be withdraw from ground water source
<ul style="list-style-type: none"> <li>Over pumping of ground water, leading to salinization and ground subsidence?</li> </ul>		√	No such impact is anticipated. The ground water abstraction has been planned after ensuring adequate availability in the ground water aquifer for withdrawal. Hydro-geological assessment study under progress
<ul style="list-style-type: none"> <li>Excessive algal growth in storage reservoir?</li> </ul>		√	Not expected from proposed project
<ul style="list-style-type: none"> <li>Increase in production of sewage beyond capabilities of community facilities?</li> </ul>		√	No such impact is anticipated. Sewage volumes shall undoubtedly increase but this increase will not be beyond the existing community facilities. Moreover, the additional volume of water finding its way into the sewage shall dilute the actual concentration of contaminants.
<ul style="list-style-type: none"> <li>Inadequate disposal of sludge from water treatment plants?</li> </ul>		√	Not Applicable as per scope of work
<ul style="list-style-type: none"> <li>Inadequate buffer zone around pumping and treatment plants to alleviate noise and other possible nuisances and protect facilities?</li> </ul>		√	Not Applicable as per scope of work
<ul style="list-style-type: none"> <li>Impairments associated with transmission lines and access roads?</li> </ul>	√		Temporary impairments with transmission lines and access roads are anticipated during laying of new pipes in the subproject area.
<ul style="list-style-type: none"> <li>Health hazards arising from inadequate design of facilities for receiving, storing, and handling of chlorine and other hazardous chemicals.</li> </ul>		√	Chlorine dosing will be done through chlorinator and chlorine safety measures and facilities are proposed to be implemented as part of the subproject as per MSIHC
<ul style="list-style-type: none"> <li>Health and safety hazards to workers from the management of chlorine used for disinfection and other contaminants?</li> </ul>		√	Proper arrangement will be made for storage of common salt, which will be used in chlorinator
<ul style="list-style-type: none"> <li>Dislocation or involuntary resettlement of people</li> </ul>		√	Not required as per present scope of work
<ul style="list-style-type: none"> <li>Disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?</li> </ul>		√	No such impact is anticipated.

Screening questions	Yes	No	Remarks
<ul style="list-style-type: none"> <li>Noise and dust from construction activities?</li> </ul>	√		The noise and the dust emissions will be insignificant as per the nature of the work. Adequate mitigation measures will be taken to further minimize it.
<ul style="list-style-type: none"> <li>Increased road traffic due to interference of construction activities?</li> </ul>	√		Construction will be managed as to allow traffic to maintain through access. There is no expected considerable increased in road traffic due to construction activities. Consultation with traffic police authority will be undertaken during laying of pipeline.
<ul style="list-style-type: none"> <li>Continuing soil erosion/silt runoff from construction operations?</li> </ul>		√	No soil erosion is anticipated. Trenches will be filled back and restored to original conditions after completion of day's work.
<ul style="list-style-type: none"> <li>Delivery of unsafe water due to poor O&amp;M treatment processes (especially mud accumulations in filters) and inadequate chlorination due to lack of adequate monitoring of chlorine residuals in distribution systems?</li> </ul>		√	O&M manual will be prepared and followed. Training will be given to the staffs regarding operation and maintenance. User agency will establish lab system of regular collection and analysis of water samples for preventing any such impact.
<ul style="list-style-type: none"> <li>Delivery of water to distribution system, which is corrosive due to inadequate attention to feeding of corrective chemicals?</li> </ul>		√	Not applicable as per chemical use
<ul style="list-style-type: none"> <li>Accidental leakage of chlorine gas?</li> </ul>		√	Not applicable as per nature of work
<ul style="list-style-type: none"> <li>Excessive abstraction of water affecting downstream water users?</li> </ul>		√	No such impact is anticipated as water source for the sub-project is ground water.
<ul style="list-style-type: none"> <li>Competing uses of water?</li> </ul>		√	Ground water is not used for any other purpose except for drinking water supply in the project area.
<ul style="list-style-type: none"> <li>Increased sewage flow due to increased water supply</li> </ul>	√		An increase in sewage flow is anticipated due to increase in water supply. However, the additional volume of water finding its way into sewage shall be beneficial, as it shall dilute the actual concentration of contaminants. As per plan STP will be constructed for treatment of raw sewage of Gaya. It is anticipated that project will be funded from this program
<ul style="list-style-type: none"> <li>Increased volume of sullage (wastewater from cooking and washing) and sludge from wastewater treatment plant</li> </ul>	√		A slight increase in the volume of sullage is expected due to increased water supply. However, the actual concentration of contaminants shall get diluted with this increase in water supply.
<ul style="list-style-type: none"> <li>Large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)?</li> </ul>		√	Construction of tube well and laying of pipeline is not a big construction. Hardly 20-30 labourers will be work during construction, therefore temporary burden to social infrastructure is insignificant In case of setting up of labour camp permission will be obtained from GMC. Water supply and sanitation arrangement will be made as per hygienic norms

Screening questions	Yes	No	Remarks
<ul style="list-style-type: none"> <li>Social conflicts if workers from other regions or countries are hired?</li> </ul>		√	Preference will be given to the local workers in order to minimize the chances of such conflicts.
<ul style="list-style-type: none"> <li>Risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during operation and construction?</li> </ul>		√	No explosive will be used. Fuel and chemicals will be stored as per storage and import of hazardous chemical rules 1989 and safety norms
<ul style="list-style-type: none"> <li>Community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning?</li> </ul>		√	No such impact is anticipated, in case of the proposed sub-project  In case of pipe laying community safety will be considered as per EMP All structural design will be as per standard design for earthquake hazard zone III

### A Checklist for Preliminary Climate Risk Screening

Country/Project Title: India/ Bihar Urban Development Investment Program

Sector: Urban Development

Subsector: Water Supply

Division/Department: Urban Development and Housing Department

Screening Questions		Score	Remarks <sup>24</sup>
<b>Location and Design of project</b>	Is siting and/or routing of the project (or its components) likely to be affected by climate conditions including extreme weather related events such as floods, droughts, storms, landslides?	0	
	Would the project design (e.g. the clearance for bridges) need to consider any hydro-meteorological parameters (e.g., sea-level, peak river flow, reliable water level, peak wind speed etc)?	0	
<b>Materials and Maintenance</b>	Would weather, current and likely future climate conditions (e.g. prevailing humidity level, temperature contrast between hot summer days and cold winter days, exposure to wind and humidity hydro-meteorological parameters likely affect the selection of project inputs over the life of project outputs (e.g. construction material)?	0	Materials as selected for the project will be not affected from extreme climatic condition.
	Would weather, current and likely future climate conditions, and related extreme events likely affect the maintenance	0	

<sup>24</sup> If possible, provide details on the sensitivity of project components to climate conditions, such as how climate parameters are considered in design standards for infrastructure components, how changes in key climate parameters and sea level might affect the siting/routing of project, the selection of construction material and/or scheduling, performances and/or the maintenance cost/scheduling of project outputs.

	(scheduling and cost) of project output(s) ?		
<b>Performance of project outputs</b>	Would weather/climate conditions, and related extreme events likely affect the performance (e.g. annual power production) of project output(s) (e.g. hydro-power generation facilities) throughout their design life time?	0	

Options for answers and corresponding score are provided below:

Response	Score
Not Likely	0
Likely	1
Very Likely	2

Responses when added that provide a score of 0 will be considered low risk project. If adding all responses will result to a score of 1-4 and that no score of 2 was given to any single response, the project will be assigned a medium risk category. A total score of 5 or more (which include providing a score of 1 in all responses) or a 2 in any single response, will be categorized as high risk project.

**Result of Initial Screening (Low, Medium, High): Low Risk**

## CHAPTER – X: Geo-hydrological Study

### 10.0 EXPLOITABLE SUB-SURFACE WATER POTENTIAL OF PHALGU RIVER & IMPACT OF 124 MLD ABSTRACTION ON ITS POTENTIAL

#### 10.1 Delineation of ground water potential zone

A ground water potential zone has been delineated based on hydro-geomorphological map, findings of resistivity surveys and covering the area where high yielding tube wells have been constructed/operated by GMC/PHED (yield ranging from 75 m<sup>3</sup>/hour to 300 m<sup>3</sup>/hour). This zone covers an area of 14.25 km<sup>2</sup> (**Figure-10.1**) on the left bank of Phalgu river, part of Manpur area on the right bank and part of Gaya city adjoining the river. Actually, this is the zone having adequate thickness of granular aquifer, deposited by Phalgu river along its present course and palaeo-channels which is most suitable for future ground water exploitation as has been proved by the existence of high yielding tube wells.


It was suggested by the CGWB during the meeting held on 16.05.2014 that ground water potential zone may cover area more than 14.25 km<sup>2</sup> if the lateral area on the left and right banks of Phalgu river are also studied by geoelectrical resistivity surveys. The existing well fields are a part of Phalgu ground water potential zone having the same aquifer thickness as in the river itself and it is likely that it may have similar aquifer thickness in lateral area. The exploitable ground water potential will be accordingly more if additional lateral area on either sides of river gets increased within the Phalgu ground water potential area.

It was also suggested by BUDIP during the meeting that an area of 4 -6 km downstream and 20 km upstream of Gaya town may also be studied along Phalgu river and it may provide additional ground water resources to plan for the 30 years water requirement.

#### 10.2 Present status of ground water abstraction on sub-surface water of Phalgu river.

It has been observed that the present total ground water abstraction of 24,000 m<sup>3</sup>/day considering 6-8 tube wells of Dandibagh well field (18,000 m<sup>3</sup>/day), 4 tube wells of Manpur area (4,000 m<sup>3</sup>/day), three tube wells of Gaya city (2,000 m<sup>3</sup>/day) near the river and 3 tube wells of MES (1000 m<sup>3</sup>/day) is recharged directly by the surface flow and during summer, it is tapping from the sub-surface water storage when the Phalgu river goes completely dry or with surface flow less than a cumec. The maximum lowering of water level in Phalgu river bed is less than 2 metres near the Dandibagh well field, which is being heavily pumped. This lowering is due to recharge provided by the sub-surface water of Phalgu river when a hydraulic gradient is developed towards the well field due to pumping of 18,000 m<sup>3</sup>/day.



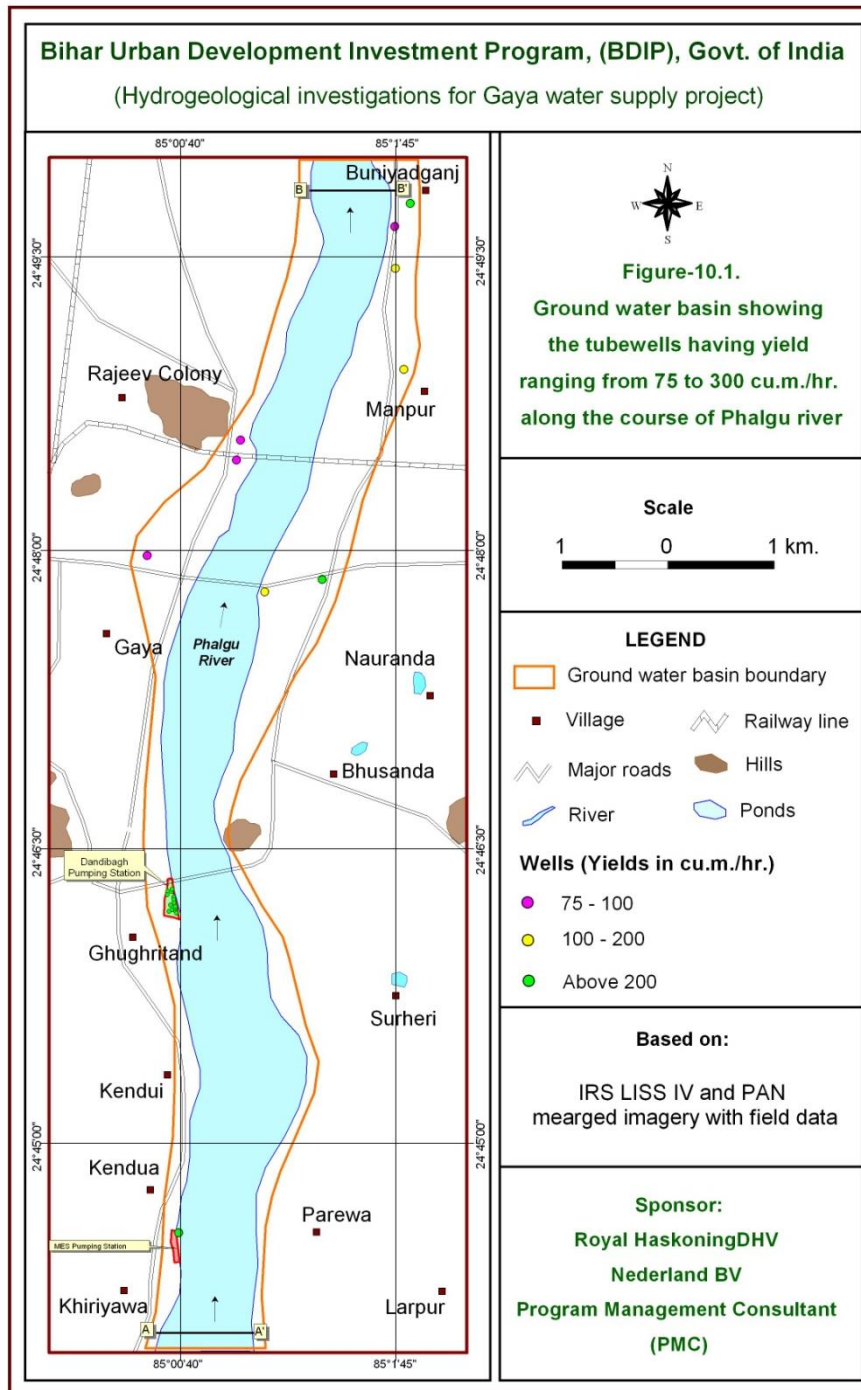

Average lowering of water in Phalgu river, from Khiriyawa to Buniyadgunj is less than a metre. However, taking the maximum lowering of two metres of water levels in river bed, the sub-surface water availability amounts to 5.7 mcm or about 76,000 m<sup>3</sup>/day taking the specific yield of 20% (as the upper river bed is loose coarse sand and gravel) within the area of 14.25 km<sup>2</sup> of ground water potential zone.

$$14.25 \times 2 \times 0.20 = 5.70 \text{ mcm}$$

Area of ground water potential zone x aquifer thickness x Specific yield = Ground water availability

It is therefore seen that at present the availability of sub-surface water within the river bed in 2 metres of the saturated river bed is much more than the ground water abstraction of 24,000 m<sup>3</sup>/day or 1.80 mcm (considering 75 day of dry river bed) indicating that the lowering of water level in the ground

water basin will be less than a metre. The present ground water abstraction is only the 31.50 % of the sub-surface water availability in an area of 14.25 km<sup>2</sup>.

Even if the ground water abstraction increases from the existing tube wells for next 5 years or so, there will be no lowering of water level in the river bed of more than 2 metres as there is still surplus of 3.9 mcm in the river bed. The yield of existing tube wells will not be affected as there is still 23 metres of aquifer thickness available to sustain the present yields

### **10.3 Sub-surface flow of water in Phalgu river during summer months.**

#### **10.3.1 Sub-surface inflow**

Once the Phalgu river is dry, there is sub-surface water flowing in the river towards the down stream side due north. An attempt has been made to estimate the inflow at the Section AA', near Khiriyawa (MES pumping station), (**Figure-10.1**) considering the hydraulic conductivity (150 m/day), section area of flow (average width of the river and average aquifer thickness) and hydraulic gradient of 1.5 m/km. The quantity of sub-surface flow amounts to 3994 m<sup>3</sup>/day or say 4000 m<sup>3</sup>/day or 0.3 mcm during the 75 days.

$$150 \times 710 \times 25 \times 1.5 / 1000 = 3994 \text{m}^3/\text{day}$$

Hydraulic conductivity x width x aquifer thickness x hydraulic gradient = Sub-surface inflow

#### **10.3.2 Sub-surface out flow of water in Phalgu river during summer months.**

The sub-surface out flow has been estimated at Section BB' near village Buniyadgunj when the maximum 1,24,000 m<sup>3</sup>/day of ground water abstraction will be done by the year 2044 from the ground water basin formed along Phalgu river. With the expected average lowering of water level of 4.35 metres, the outflow will be reduced with aquifer thickness and will be 2950 m<sup>3</sup>/day.

$$150 \times 635 \times 20.65 \times 1.5 / 1000 = 2950 \text{m}^3/\text{day}$$

Hydraulic conductivity x width x aquifer thickness x hydraulic gradient = Sub-surface outflow

It is not known at this stage that what will be the impact of reduced inflow of river during summer months on the downstream stack holders of Section BB' as the number of irrigation tube wells are not known. However, as the irrigation wells are not operated during the summer months, (after the harvesting of Rabi crops), no major impact is anticipated.

### **10.4 Impact of ground water abstraction of 124 MLD on sub-surface water of Phalgu river**

The sub-surface water storage in the ground water potential zone covering an area of 14.25 km<sup>2</sup> will be 53.43 mcm taking average specific yield of 15 % for the average aquifer thickness of 25 metres

$$14.25 \times 25 \times 0.15 = 53.43 \text{mcm}$$

Area of ground water potential zone x aquifer thickness x Specific yield = Ground water availability

It is proposed that by the year 2044, there will be ground water abstraction of 124 MLD from tube wells located on left and right banks of the river. The ground water abstraction during the 75 days @ 1,24,000 m<sup>3</sup>/day will be 9.30 mcm which happens to be 17.40 % of the total sub-surface water storage. So, the water level will be lowered by 4.35 metres, leaving a substantial saturated aquifer thickness of 20.65 metres. It is presumed that entire ground water abstraction will be from sub-surface water storage of Phalgu river and the anticipated lowering of water level in the river bed will be 4.35 metres from an area of 14.25 km<sup>2</sup> of the ground water potential zone. This quantity of water will be derived from the static ground water reserves of the ground water potential zone covering the river bed which have been calculated as 53.43 mcm. In addition, there will inflow of sub-surface water from the upstream side, near Khiriyawa which has been estimated as 4000 m<sup>3</sup>/day or 0.30 mcm during 75 days. The sub-surface inflow will provide additional quantity of water for compensating the dewatering of the basin and raising the water level in the summer months. The total water storage including the sub-surface inflow of 0.30 mcm will be 53.73 mcm. The ground water abstraction of 9.30

mcm will be 17.30 % which will create lowering of water level by 4.325 metres, leaving the aquifer thickness of 20.675 metres.

### **10.5 Discharge of tube well at reduced aquifer thickness during summer**

It has been observed that tube wells constructed in Dandibagh well field are yielding around 300 m<sup>3</sup>/hour at very low drawdown, less than 3 metres. The average thickness of aquifer is around 25 metres.

Hydrogeologically, it is stated that discharge of a tube well is directly proportional to its transmissivity which is hydraulic conductivity x aquifer thickness. Dandibagh, tube wells are yielding around 300 m<sup>3</sup>/hour from an aquifer having transmissivity of 3750 m<sup>2</sup>/day (K=150 m/day and aquifer thickness of 25 metres). The same tube well with aquifer thickness of 20 metres during summer with and maximum destuation of 5 metres due to ground water abstraction of 124 MLD, the discharge of the tube well will be 240 m<sup>3</sup>/hour at the same drawdown. Generally, tube wells tapping granular aquifer are pumped at normal drawdown of 6 to 8 metres. If the same tube well is pumped at 300 m<sup>3</sup>/hour with aquifer thickness of 20 metres, it will yield 300 m<sup>3</sup>/hour at drawdown of 6 to 8 metres. Normally, in case of confined aquifer, the discharge is directly proportional to drawdown and a tube well tapping confined aquifer will yield double the discharge at the double value of drawdown but in case of phreatic aquifer, it is not so and by doubling the discharge, the drawdown value becomes more than double due to reduced transmissivity. So, the tube wells will maintain the same yield even in the summer but with increased drawdown by the same capacity of turbine pumps

### **10.6 Estimation of the period when the river has less surface flow to sustain well fields**

While estimating the lowering of water in Phalgu river of 4.325 m for ground water abstraction of 124 MLD, it has been presumed that river will become dry or will have less flow of 2 cumecs for 75 days. (April to Mid –June). This is for period when monsoon fails for prolonged years. A case study has been done for Phalgu river on 18<sup>th</sup> February, 2014 using Manning equation. During the year 2013, the catchment area of Phalgu river received rainfall of only 574 mm against the normal annual rainfall of 1089 mm (Average of 100 years of IMD data). So, it was much below the average annual rainfall and consequently very much reduced flow. It was observed on 18<sup>th</sup> February, 2014 that there is average water column of 15 cm in the river in the average width of 30 metres (**Photoplate-2.2**). This much flow is equivalent to 2.5 m<sup>3</sup>/s or 0.21 mcm. as per the Manning's equation.

It means that by the 1<sup>st</sup> week of March, 2014, it will be reduced to 0.124 mcm and the tube wells would start tapping water from the sub-surface water of the river. It is therefore safe to assume that if the rainfall would have been 1089 mm of normal annual rainfall, the river might have had the surface flow of 2 cumecs (0.124 mcm) up to end of April, 2014. Under such situation, the dry period of Phalgu river would have been only 45 or 50 days.

The maximum average peak flow of Phalgu river during the flood period has been observed as 3376 cumecs, when the rainfall during any day of the month of July was around 235 mm/day, the maximum rainfall as shown in Iso-pluvial map of IMD during last 25 years. The minimum flow during such years of less than 2 cumecs will be either in the 1<sup>st</sup> week or 2<sup>nd</sup> week of May for normal rainfall of 1089 mm and 50.47 mm in October. Under such situation, the dry period will be only of 30 days. Accordingly, there will be less drawl of sub-surface water storage of Phalgu river.

### **10.7 Stream gauging data recorded by Central Water Commission on Phalgu river at Gaya**

Central Water Commission (CWC) has set up a stream gauging site on the left bank of Phalgu river, just downstream of road bridge (**Photoplat-10.1**). This bank gets water when Phalgu river has full flow in its river width and during flood periods. Most of the time when there is no flow of water on the left bank, as seen in **Photoplate-10.2** but there is flow in the river, somewhere in its central part when the flow is more than 2 cumecs.

Efforts were made by HCPL to use the stream gauge data of CWC at Gaya if it could give reliable estimate of the period when the river is completely dry and well fields are tapping sub-surface water

storage. But it is observed that gauge heights show no flow while the central part of the river is having flow more than 124 MLD, the water requirement of Gaya town in the year 2044.

Under such situation, there is no other alternative except to take up hydrological modeling of Phalgu river basin.

**Photoplate-10.1. Stream gauging station being monitored by CWC**



**Photoplate-10.2. Flow in Phalgu river in February while the left bank of CWC station shows no flow much earlier**



## **10.8 Conclusions**

Based on the hydrogeological assessment studies of the ground water potential zone, it is observed that present ground water abstraction of 24,000 m<sup>3</sup>/day for 75 days( when the river is dry ) is hardly 31.50 % of the total sub-surface water storage ( 5.70 mcm ) within 2 metres of aquifer in 14.25 km<sup>2</sup> of the ground water potential zone during summer months.





Similarly, with the ground water abstraction of 124 MLD for 75 days of 9.30 mcm from the sub-surface water storage of 25 m thick aquifer of 53.43 mcm will be 17.40 % and it will lower will lower the water level by 4.35 metres, still keeping the aquifer thickness of 20.65 metres which is considered as sufficient to sustain the yield of tube wells.

So, it is concluded that despite lowering of water level by 4.35 metres during summer months, the tube wells will sustain the yield and will restore original yield as soon as Phalgu river starts flowing after getting the first spell of rainfall in mid -June.

The impact of pumping 124 MLD during the summer months (75 days) can be further reduced if the well fields are increased instead of having only one well field of Dandibagh. Two more well fields can be developed, one near village Kendui and another near Kendua on the left bank (Figure above) and fourth near Manpur - Buniyadgunj on the right bank (if investigated by resistivity surveys). By having four different well fields, there will be less pumping from a small area of a well field, thereby creating a small ground water depression and less lowering of water level around it.

## Photo illustration and Google Map – Project Locations

## Proposed Tube Wells

Sr. No.	Tube well / batteries locations	Tube well IDs	Coordinates	Site photographs	Google map
1	Gauri Shankar Mandir	40, 41, 42, 43	24°49'7.37"N/85° 1'50.25"E		
2	Budhva Mahadev Mandir	44	24°49'48.03"N/85° 1'44.82"E		







3	BhusandaMela	45, 46	24°47'4.03"N/85° 0'55.54"E		
4	Dharamshala	60, 61, 62, 63	24°.81'4.86N/ 85°.0'19.37"E		
5	Polytechnic College	47, 48, 49	24°.76'3.033N/ 85°.0'10.61"E		

6	Kendui	50, 51, 52	24°.75'7.391N/8 5°.0'11.99"E		
7	Kendua	53, 54, 55, 56, 57, 58, 59	24°.74'6.205N/ 85°.0'11.336"E		



**Proposed Reservoirs under GWSP2**

Reservoir Location	Coordinates	Site photographs	Google map
CWR at Govt. ITI	24°.76'0.2945N/ 85°.0'10.668"E		
GLSR at Singrasthan	24°46'36.66"N 84°59'35.38"E		


Gaya water supply package GWSP2; Google Maps










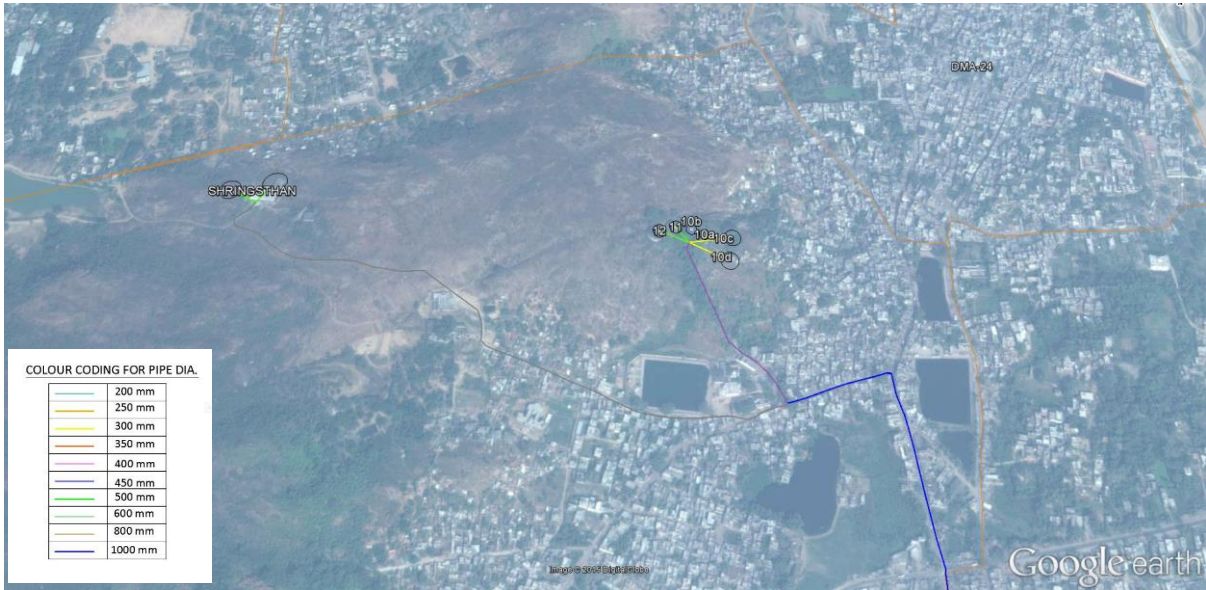


Lay out and site management plan drawing – ITI Polytechnic College and Singrasthan

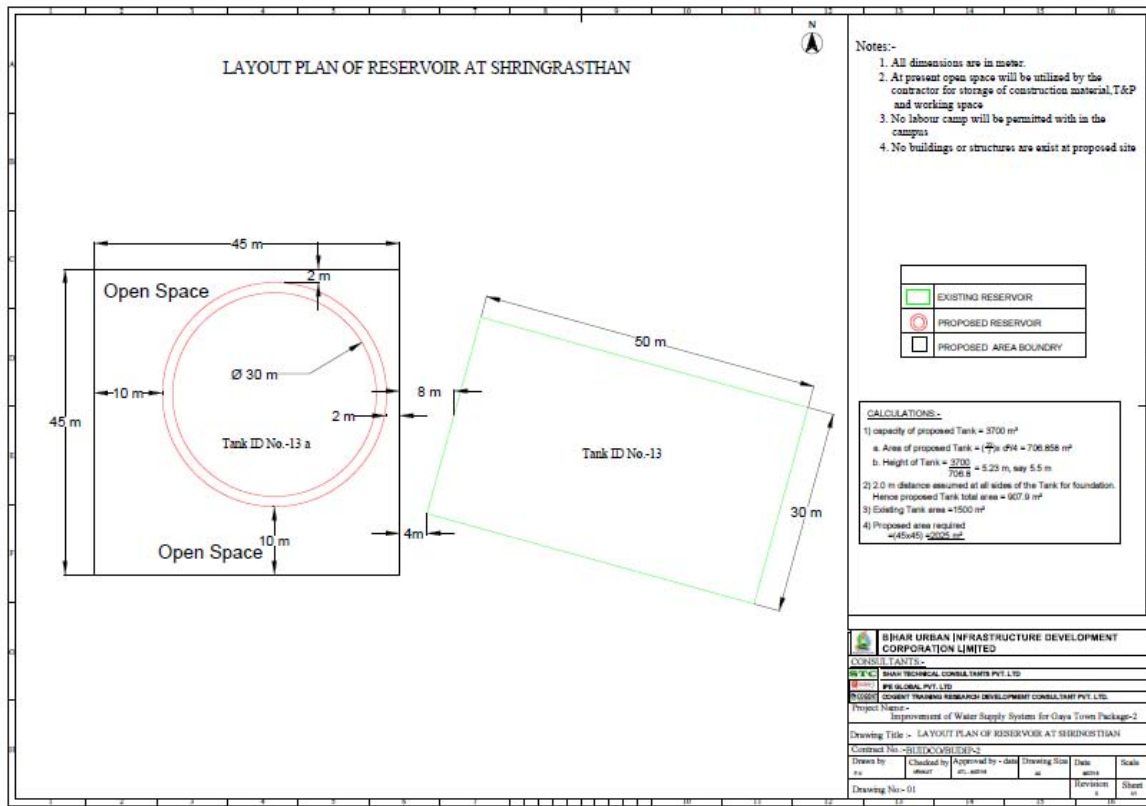

Layout plan at Singrasthan




Existing approach road at Singrasthan

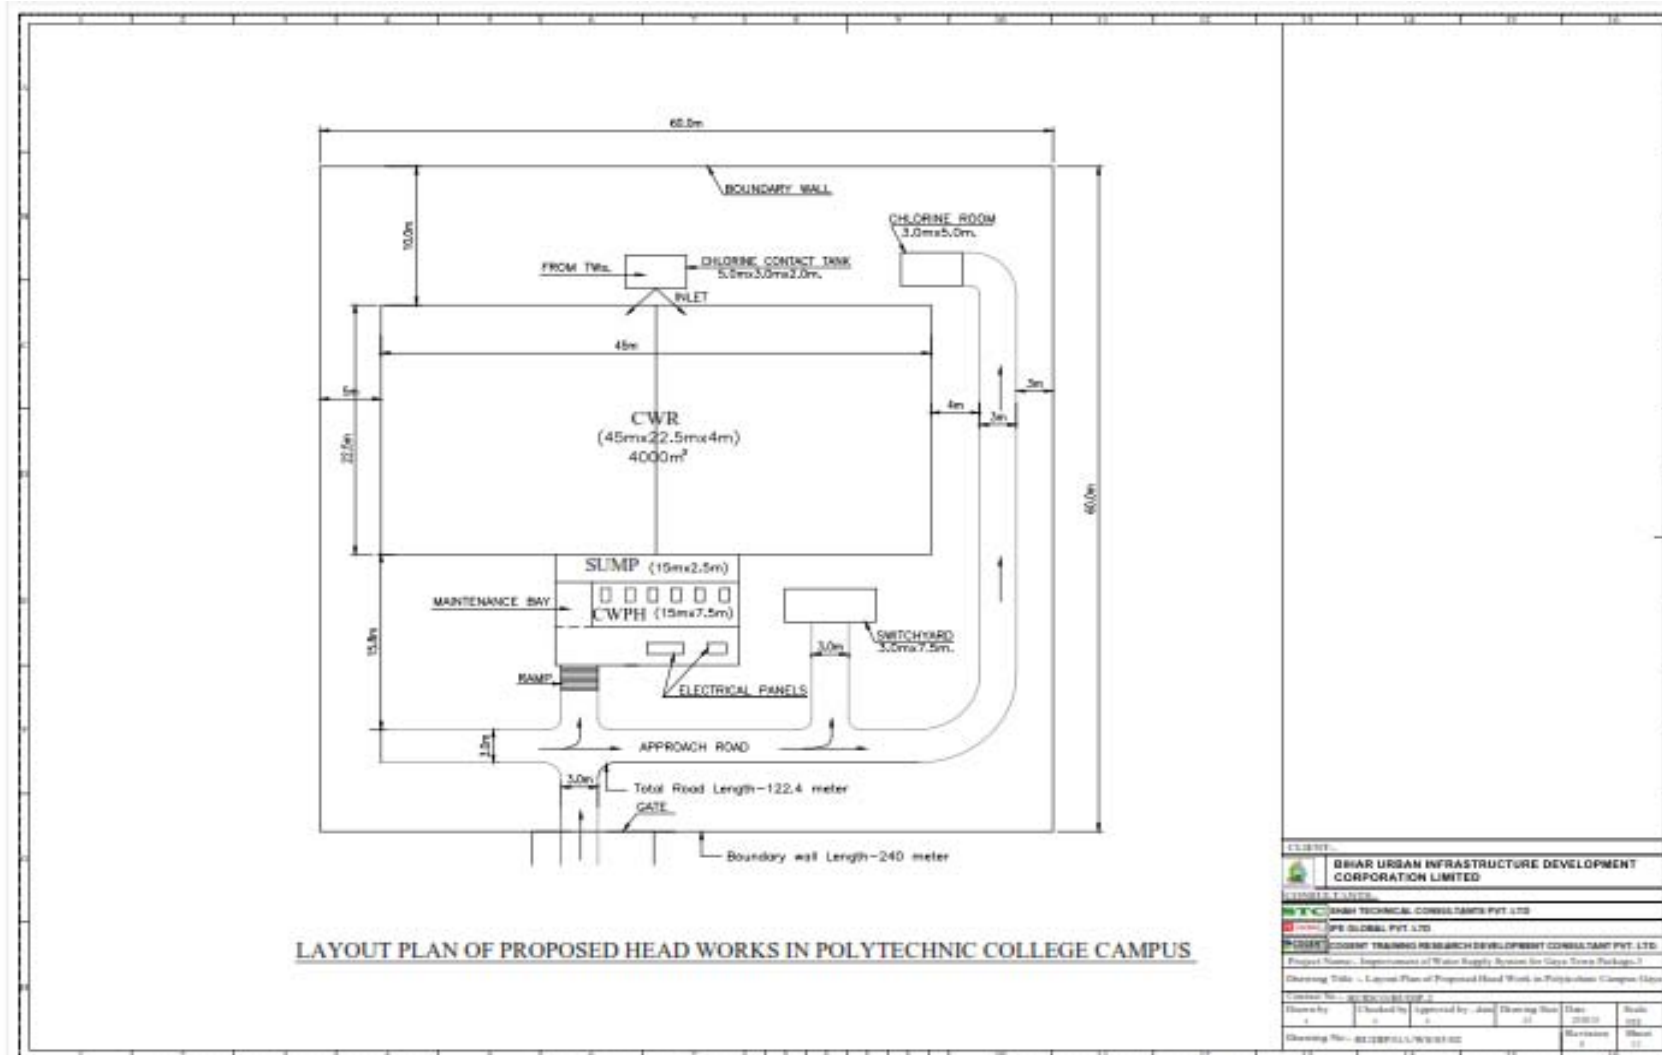

**Layout plan ITI Polytechnic College**



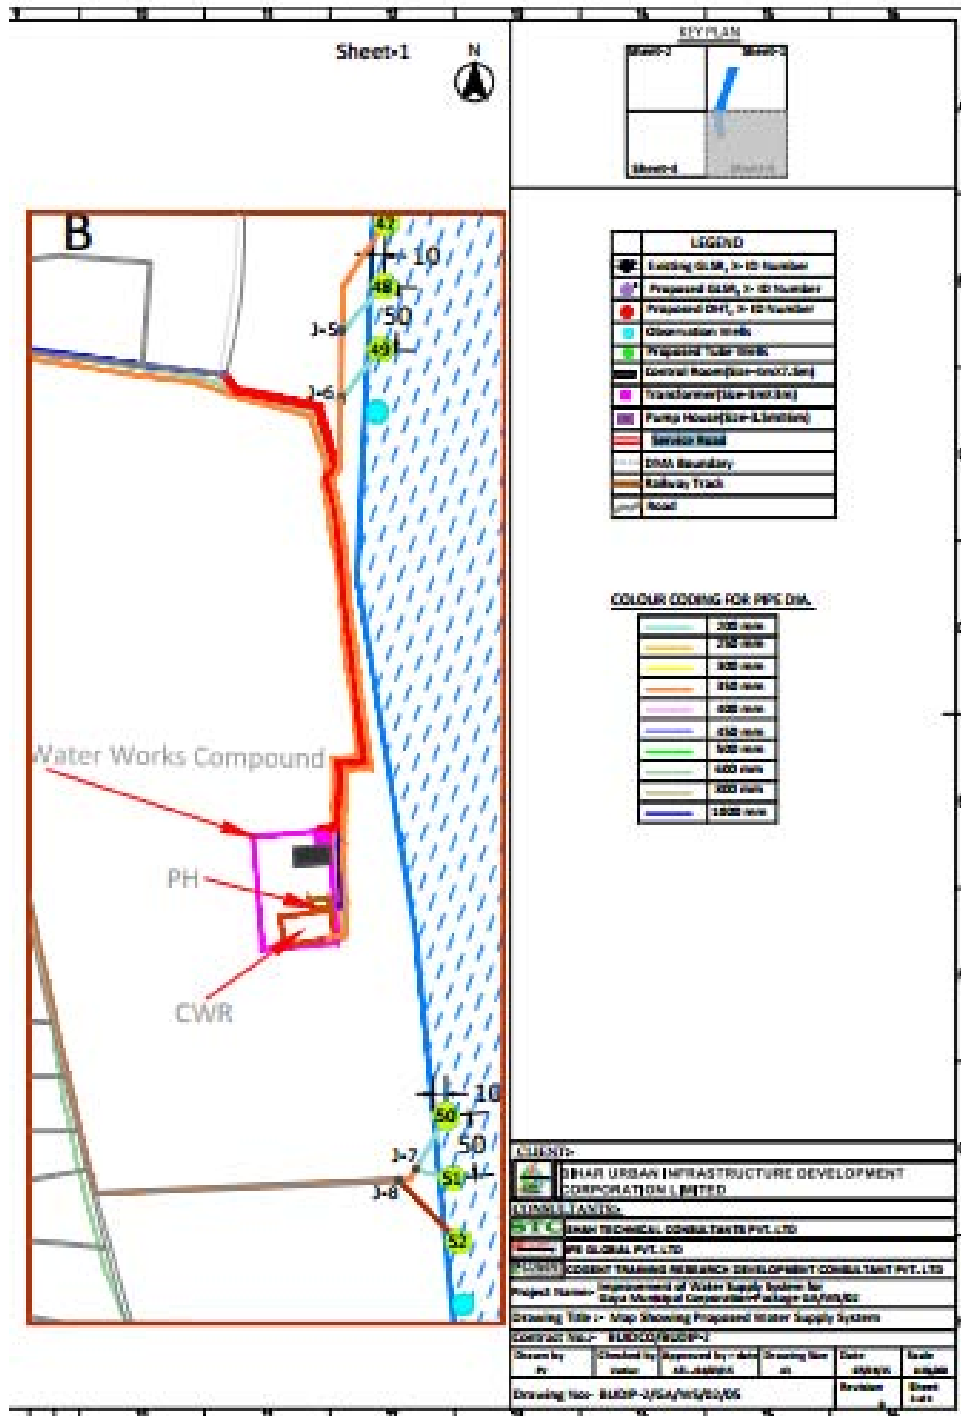

**CLIENT:-**

BIHAR URBAN INFRASTRUCTURE DEVELOPMENT CORPORATION LIMITED

**CONSULTANTS:-**

SANKH TECHNICAL CONSULTANTS PVT. LTD.

PE GLOBAL PVT. LTD.

COBEST TRAINING RESEARCH DEVELOPMENT CONSULTANT PVT. LTD.

Project Name:- Improvement of Water Supply System for Gaya Municipal Corporation Package 02/03/04

Drawing Title :- Map Showing Proposed Water Supply System

Contract No.:- BURECO/WSP-1

Drawn by P	Checked by M.A.	Approved by S.K.	Drawing No. 02/03/04	Date 08/08/20	Scale AS SHOWN
Drawing No.- BURECO-WSP-02/03/04			Revision	Sheet out of	

**Approach Road ITI Polytechnic College**

## Minutes of a Meeting with CGWB

Bihar Urban Development Investment Program - BUDIP

### Meeting on Water Source for Gaya Water Supply

16 May 2014

11am, BUIDCo Conference Room

#### Participants

- |          |                             |   |
|----------|-----------------------------|---|
| • BUIDCo | Mr. A.K. Sharma, CGM        | Mr. D.S. Mishra, GM Works                                   |
| • CGWB   | Mr. G.K. Roy                | Mr. S.N. Dwivedi, Scientist                                 |
| • PMU    | Mr. V.K. Sharma, PM         |   |
| • PMC    | Mr. J.H.C. Butter, TL       | J.K. Singh, Dr. A. Mitra, J. Tyagi, A.K. Patni,<br>N. Appa. |
| • HGSC   | Dr. R. Khilnani             |   |
| • DSC    | Mr. S. Ramakrishnan, Add.TL |   |

### Minutes

1. **Presentation of the methodology and findings of the hydro-geological investigations for Gaya Water Supply Project**, by Dr. R. Khilnani, Hydro-Geo Survey Consultants (HGSC), Jodhpur.
2. **Discussions on the findings**
  - 2.1. CGWB complemented BUDIPO and HGSC on the comprehensiveness of the investigations and the richness of information provided in the 2<sup>nd</sup> Interim Report.
  - 2.2. CGWB had a number of specific queries:
    - To assess the exploitable water quantities, could a TIL methodology be used?
    - A specific yield of the Phalgu River bed of 15% seems at the high side, also considering that clayey pockets are encountered.
    - In the assessment of the exploitability of the aquifer, the area considered may be extended laterally from the river bed.
    - A lowering of the water table during the summer period (no flow in the Phalgu River) of 4 to 6m would be acceptable. Key condition is that hand pumped tube wells in the area would not be affected.
    - The duration of no-flow in the Phalgu river is a key parameter and further investigations with the aid of a runoff model would be advisable. Without further research a duration of 120 days seems acceptable.
  - 2.3. DSC had a number of observations:
    - A duration of no-flow of 2.5 months seems too optimistic;
    - The water demand of 124MLD mentioned in the report is not correct. This was clarified by PMC. The principles of the findings are not affected.
    - 50% dependability. This has already been adjusted since the 1<sup>st</sup> Interim Report in the 2<sup>nd</sup> Interim Report.
    - Advice to carry out additional resistivity soundings in the Manpur Area.
  - 2.4. BUIDCo advised that well siting, spacing and design be carried out based on the results of this 2<sup>nd</sup> Interim Report and that further investigations be carried out in parallel.
  - 2.5. Further discussions included the following topics:
    - Resistivity soundings may be carried out lateral (east and west) from the Phalgu.
    - There shall be a restriction on sand/gravel mining in the concerned stretch.
    - There is a need for continuous monitoring during operations.



### Bihar Urban Development Investment Program - BUDIP

- On a comprehensive groundwater model: this is complicated to make and requires extensive factual data. It may be considered after monitoring data has been gathered over a longer period of time.

### 3. Conclusions

- 3.1. The development of a well field to meet the medium-term (15-year) needs of Gaya Town is recommended.
- 3.2. A monitoring system shall be part of the design, consisting of some 6 observations wells in the well field area plus some 3 wells further away. A telemetric system shall be considered.
- 3.3. Further investigations to be taken up by BUDIP to plan for the 30-year requirements:
  - to obtain more detailed information and assurance/ higher dependability about exploitation of the areas south of the town
  - to examine the potential downstream of the town (4 – 6 km), and
  - to examine the potentials further upstream (20km).
  - And under GHSC's current contract, the execution of additional resistivity soundings in Manpur Area.


### Signatures



(Mr. A.K. Sharma)  
Chief General Manager, BUIDCo



(Mr. G.K. Roy)  
CGWB

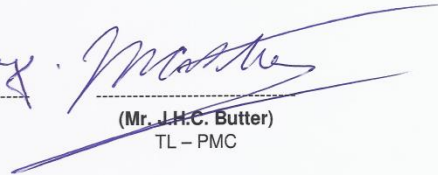

(Mr. J.H.C. Butter)  
TL – PMC



(Mr. D.S. Mishra)  
General Manger (Works), BUIDCo




(Mr. S.N. Dwivedi)  
Scientist, CGWB

(Dr. R. Khilnani)  
HGSC



(Mr. V.K. Sharma)  
Program Manager, PMU



(Mr. S. Ramakrishnan)  
Add. TL - DSC

### Hydro-geological Study- Water quality

To find out the suitability of ground water which is being supplied to Gaya for drinking use, 10 water samples were collected from tube wells of Dandibagh pumping well field and other wells of study area. The water samples were analyzed in the Chemical Laboratory of the HCPL at Jodhpur which is working since 1985 and is an ISO accredited Lab. by LMS (Linear Management and Certification Solutions Private Limited) of DAC. The water samples for bacteriological tests like coliform and E.Coli were brought by air from Gaya to Jodhpur within 2 days from the date of collection in perfectly sealed and sterilized bottles and for other radicals, there were analyzed within 3 days in sealed and sterilized bottles without affecting its chemical composition. The chemical analysis results were compared with the Indian Drinking Water Standards (IS-10,500-2012)

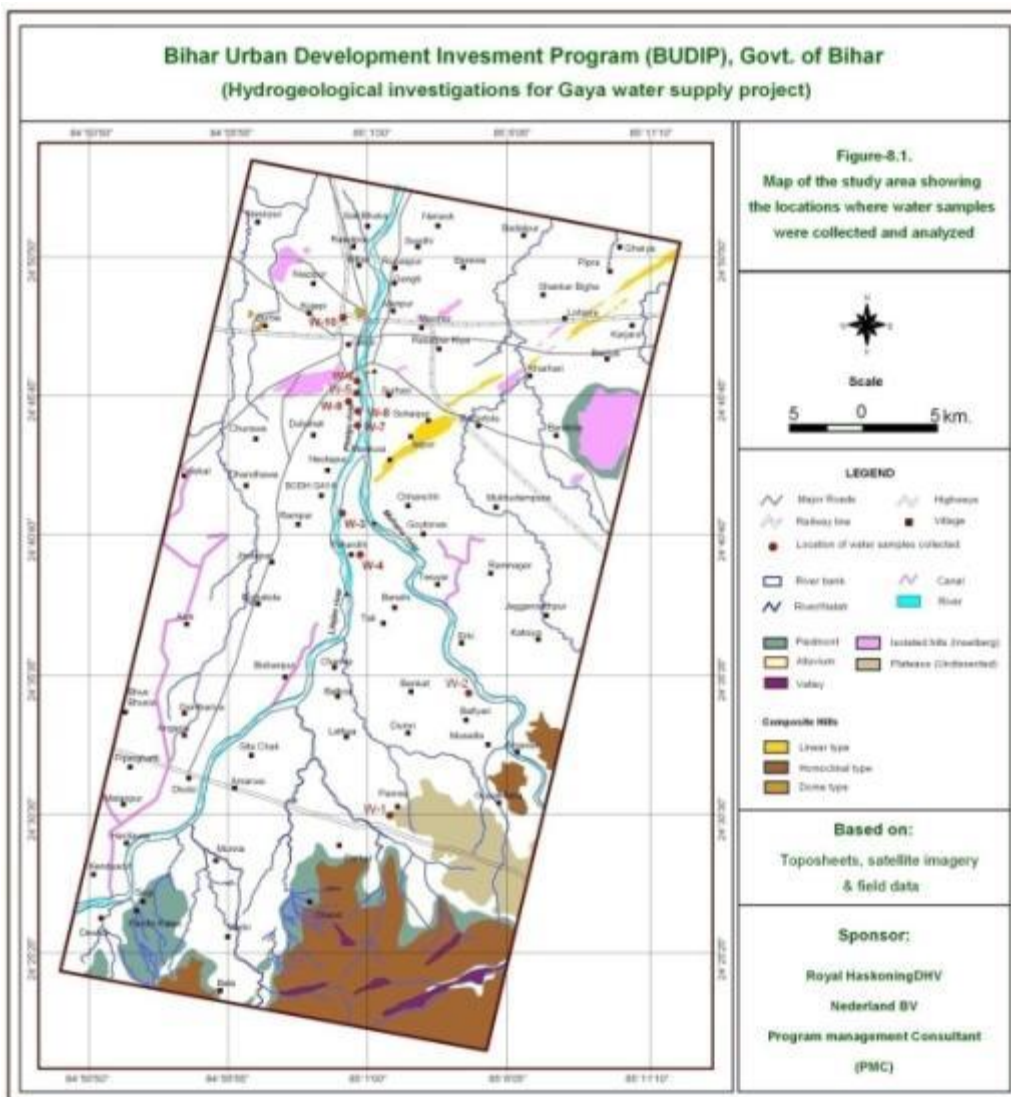


Figure: Location of water sampling areas

**Table- 6.1: Details of location, type of source, coordinates and villages from where the water samples were collected and analyzed**

S. No.	Water Sample Code	Source	Location/village	Co-ordinates	
				Longitude	Latitude
1.	WS-1	Hand pump	Partapi	85° 1' 47.4"	24° 30' 26.1"
2.	WS-2	Hand pump	Mohanpur	85° 4' 39.0"	24° 34' 53.8"
3.	WS-3	Hand pump	Bakror	85° 0' 03.7"	24° 41' 26.3"
4.	WS-4	Hand pump	Nima	85° 0' 42.4"	24° 39' 56.1"
5.	WS-5	Hand pump	ITI Ghughitand	85° 0' 35.0"	24° 45' 49.0"
6.	WS-6	Tube well	Dandibagh pump house	85° 0' 35.8"	24° 46' 15.2"
7.	WS-7	Hand pump	Khiriyawan	85° 0' 36.5"	24° 44' 37.7"
8.	WS-8	Tube well	Kundua	85° 0' 37.8"	24° 45' 08.6"
9.	WS-9	Tube well	Kundui	85° 0' 17.4"	24° 45' 30.5"
10.	WS-10	Tube well	Janta Colony, Gaya	85° 0' 05.2"	24° 48' 33.9"

**Table 6.2: Chemical analysis of water sample collected form study area and acceptable limits as per IS-10,500-2012 (May 2014)**

Parameter Tested	Results					Indian Standards IS: 10,500-2012	
	WS-1	WS-2	WS-3	WS-4	WS-5	Acceptable limit	Permissible limit
Color (Hazen units)	Colorless	Colorless	Colorless	Colorless	Colorless	5	15
Odor	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable
Turbidity (NTU )	Nil	1	Nil	Nil	2	1	5
Taste	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable
pH	7.79	7.74	7.71	7.74	7.72	6.5-8.5	No Relaxation
Electrical Conductivity at 25°C in µmhos/cm	595	510	272	518	315	N.P.	N.P.
TDS (Total Dissolved Solids)	340	285	155	292	175	500	2000
Calcium	39	33	18	34	19	75	200
Magnesium	23	20	10	21	12	30	100
Sodium	46	39	22	38	25	N.P.	N.P.
Potassium	3	2	1	2	1	N.P.	N.P.
Chloride	85	78	42	79	46	250	1000
Carbonate	138	119	61	120	72	N.P.	N.P.
Bi-Carbonate	-	-	-	-	-	N.P.	N.P.
Sulphate	46	32	17	34	21	200	400
Nitrate	17	13	8	15	9	45	No relaxation
Fluoride	0.37	0.34	0.29	0.34	0.29	1.0	1.5
Total Hardness as CaCO <sub>3</sub>	192	165	86	171	97	200	600
Arsenic	BDL	BDL	BDL	BDL	BDL	0.01	0.05
E. Coli MPN/ 100 ml	Absent	Absent	Absent	Absent	Absent	Absent	Absent
Total Coliform MPN/100	0	0	0	0	0		

Contd..

Parameter Tested	Results					Indian Standards IS: 10500-2012	
	WS-6	WS-7	WS-8	WS-9	WS-10	Acceptable limit	Permissible limit
Color (Hazen units)	Colorless	Colorless	Colorless	Colorless	Colorless	5	15
Odor	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable
Turbidity(NTU)	2	Nil	Nil	Nil	3	5	10
Taste	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable	Agreeable
pH	7.72	7.71	7.69	7.78	7.70	6.5-8.5	No Relaxation
Electrical Conductivity at 25°C in µmhos/cm	310	290	312	326	366	N.P.	N.P.
TDS (Total Dissolve Solids)	173	165	170	184	214	500	2000
Calcium	18	17	18	20	22	75	200
Magnesium	12	10	11	13	14	30	100
Sodium	26	26	27	25	30	N.P.	N.P.
Potassium	1	1	1	3	2	N.P.	N.P.
Chloride	45	44	45	48	51	250	1000
Carbonate	71	66	71	70	84	N.P.	N.P.
Bi-Carbonate	-	-	-	-	-	N.P.	N.P.
Sulphate	21	18	21	23	27	200	400
Nitrate	8	7	8	9	14	45	100
Fluoride	0.26	0.27	0.22	0.24	0.28	1.0	1.5
Total Hardness as CaCO <sub>3</sub>	94	84	90	103	112	200	600
Arsenic	BDL	BDL	BDL	BDL	BDL	0.01	0.05
E. Coli MPN/ 100 ml	Absent	Absent	Absent	Absent	Absent	Absent	Absent
Total Coliform MPN/100	0	0	0	0	0		

BDL- Below detection limit

N.P – Not prescribed

**NOTE****Gaya Water Supply Project Phase 2 – Water Source****Environment Implication related to waste water discharge impact on ground water resources at Gaya – Water Quality Analysis**

PMC, 28 July 2015

**1. Purpose of Investigation**

Gaya city is situated along the banks of River Phalgu. This river is formed by the merger of two streams of Nilanjan and Mohana about 5 km south of Gaya city, and flows south to north through the heart of Gaya District. The width of the river in Gaya is about 900 m. The famous Vishnupad Temple is located on the banks of the river and there are a number of *ghats* (bathing and worshipping) developed for the pilgrims. This river is a tributary of River Punpun, which joins River Ganga near Patna.

Under Gaya Water Supply Project – Package 2 (GWSP2) a new water source will be developed, by drawing water from the aquifer in the bed of the Phalgu River through batteries of new production tube wells (PTW). Because the aquifer is unconfined it is susceptible to contamination from nearby sources such as the city's wastewater and agricultural activities. This possible threat has been examined by analysing the water quality of two existing PTWs in the same aquifer and analysing possible sources of contamination, i.e. i) urban wastewater draining into the Phalgu River, upstream of the two PTWs and ii) groundwater underlying agricultural fields in the vicinity.

Water supplied from the existing Panchayat Akhara well field is located at the downstream side of Gaya city. It is noted that there is problem of colour, odour of water from this well field. This may be due to pollution of groundwater from disposal of untreated waste into the river. There is no sewerage system in Gaya. Many people in the city use septic tanks and it is reported that these do not function properly, with leachate seeping into the groundwater through percolation and with overflows from septic tanks flowing into the town's drains. The same drains are recipient of untreated human wastes and of garbage. The other well field is located at Dandibag at the upstream side of the city.

**2. Method of Analyses***Sampling locations*

Sampling locations and number of samples are:


- ✓ Two samples of drinking water were collected from PTWs at Dandibagh and Panchyati Akhara and analysed for both pesticide residue and physic-chemical analysis.
- ✓ Two ground water samples were collected from tube wells located at Amwan village and Khiriya village near new tube well source and analysed for pesticide residue for understanding impact on groundwater from agricultural activities.
- ✓ Three samples of waste water were collected, two from Bodhgaya (Mochari *nallaha* and Dhairiya Bigha) and one from Gaya central for physic chemical analysis of

wastewater.

- ✓ The Mochari *nallaha* in Bodhgaya drains a southern section of the town. The sample at Dhairiya Bigha is taken from the Phalgu River, immediately downstream of the town.
- ✓ The sample in Gaya city is taken from a relatively large drain which receives water from the congested city centre. It discharges into the Phalgu River some 1.5km upstream of the PTW at Panchyati Akhara.



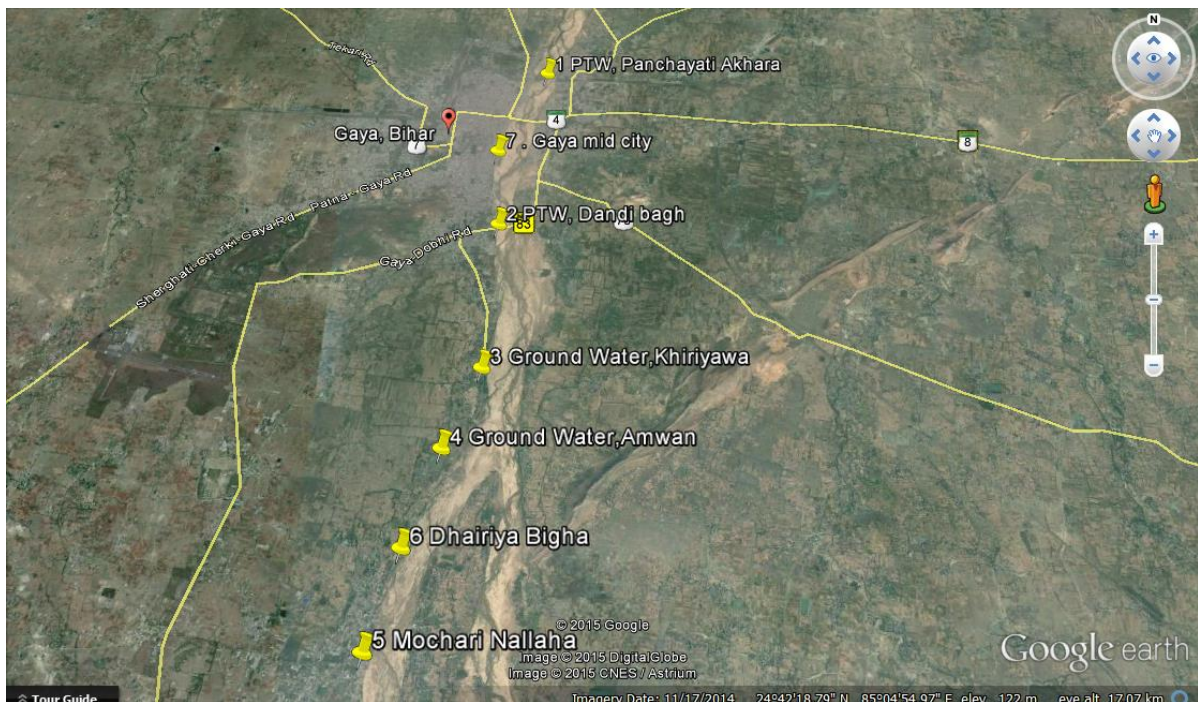


Location map is shown in **Figure 1**. Details of location including co-ordinate shown in **Table 7-1**.



**Figure 1: Location of sampling stations**





**Table Appendix 7-1 Detail water sampling locations**

S.No	Name of Site	Sample	Coordinate	Location map
1	Panchayati Akhara Tube well	Physicochemical and Pesticide residue Analysis	24.4748, 85.0047	
2	DandiBagh Tubewell (srimvikasno2PumpH62)	Physico chemical and Pesticide residue Analysis	24.4612,85.0038	
3	Khiriyawa (Jaynath)	Pesticide Residue in Tube well/Hand pump	24.4427,85.0031	
4	Amwan Village (Lal JiPrasad)	Pesticide Residue in Tube well/Hand pump	24.4334,85.0010	
5	GWSP-2 Mochari Nallaha	Physico-chemical Analysis of Wastewater	24.4142, 84.5940	

S.No	Name of Site	Sample	Coordinate	Location map
6	GWSP-2 Dhairiya Bigha	Physico-chemical Analysis of Wastewater	24.4236,84.5952	
7	Gaya Mid City	Physico-chemical Analysis of Wastewater	24.4713, 85.0035	

### Parameters

The water quality has been tested to assess possible contamination resulting from wastewater discharge and agricultural activities.

During sampling DO, temperature, and colour were determined at sampling locations using digital meters. Water samples analysed in laboratory for physico-chemical parameter as Amomical Nitrogen as N , BOD at 27°C for 3 days, COD, Chloride as Cl, colour, Conductivity at 20°C, DO, Fluoride, Total Hardness as CaCO<sub>3</sub>, Total phosphates as PO<sub>4</sub>, Sulphate as SO<sub>4</sub>, TSS, TDS, Temperature, Nitrite as NO<sub>2</sub>, Residual Free Chlorine, Arsenic as As, Total Chromium as Cr, Cu Pb, Manganese as Mn, Cd, Zn, Na, K, Ca Mg, Fe, Oil and Grease. Pesticide residue analysis of the selected parameter which are generally used in agriculture are Methyl Parathion, Chlorpyrifos, Malathion, Phorate, Gamma HCH ,Alpha HCH, Beta HCH, Delta HCH Endosulphan (alpha, beta and Sulphate).

### Sample collection times

Water samples were collected during the dry period pre-monsoon season (on 17<sup>th</sup> June 2015). Dry period/ pre monsoon season is the worst season and that time concentration of parameters in waste water and well water is comparatively higher than normal condition.

### 3. Results and Discussion

**Table Appendix 7-2** shows concentration of pesticide residues and status of physico-chemical parameters in drinking water as collected from the present well field areas.

Result indicates presence of Fluoride in both the samples, but concentration level is within the limit. Total hardness level at Panchyati Akhara is 210.1 mg/l, the value above the limit and which indicates presence of high level of Ca and Mg in water. Total dissolved solid level is also high in tube well water at Pancayati Akhra. This is due to high salt content of water. Concentrations of all other parameters are within the limit. Concentrations of heavy metals are always below the detection limit except concentration of Pb, which is detected in



Panchyati Akhra tube well water. Disposal of waste and discharge of untreated effluent in the Phalgu River at Panchyati Akhra area may be the reason of contamination of tube well water. Pesticides are not detected in water samples.

**Table Appendix 7-2: Testing results for Production Tube Wells: and physico- chemical properties and pesticide residues**

S.No	Parameters	Location		Standard: IS 10500:2012	
		1. Panchayati Akhara	2. Dandibagh	Acceptable	Permissible
	<b>Physicochemical</b>			<b>Acceptable</b>	<b>Permissible</b>
1	BOD(27 <sup>0</sup> C for3days)mg/L	BDL	BDL	-	-
2	COD mg/L	<5.0	<5.0	-	-
3	Calcium as Ca mg/L	56.7	26.7	75	200
4	Chloride as Cl mg/L	55.8	14.0	250	1000
5	Residual free Chlorine mg/L	BDL	BDL	0.2	1
6	Colour in Hazen unit	10	10	5	15
7	Fluoride asF mg/L	0.3	0.3	1.0	1.5
8	TotalhardnessasCaCO <sub>3</sub> mg/L	210.1	99.0	200	600
9	Mg mg/L	16.7	7.9	30	100
10	NitrateasNO <sub>3</sub> mg/L	5.29	2.20	45	Norelaxation
11	pH at25 <sup>0</sup> C	7.58	7.84	6.5-8.5	Norelaxation
12	SulphatesasSO <sub>4</sub> mg/L	9.6	6.3	200	400
13	TDS mg/L	311.2	165.6	500	2000
14	Arsenic as As mg/L	BDL	BDL	0.01	0.05
15	Total Chromium as Cr mg/L	BDL	BDL	0.05	Norelaxation
16	Cu mg/L	BDL	BDL	0.05	1.5
17	Pb mg/L	0.010	BDL	0.01	Norelaxation
18	Mn mg/L	BDL	BDL	0.1	0.3
19	Cd mg/L	BDL	BDL	0.003	-
20	Amoniacal Nitrogen as N mg/L	BDL	BDL	-	-
21	DO mg/L	3.4	4.5	-	-
22	Conductivity as25 <sup>0</sup> C μS/cm	497	266	-	-
23	Oil and Grease mg/L	BDL	BDL	-	-
24	Fe mg/L	0.06	0.07	0.3	Non relaxation
25	Zn mg/L	0.02	0.02	5	15
26	Na mg/L	47.49	21.28	-	-
27	K mg/L	2.78	BDL	-	-
28	TotalPhosphatesasPO <sub>4</sub> mg/L	0.37	BDL	-	-
29	TSS mg/L	BDL	BDL	-	-
30	Temperature <sup>0</sup> C	30.6	30.5	-	-
31	NitriteasNO <sub>2</sub> mg/L	BDL	BDL	-	-
	<b>Pesticides</b>			-	-
1	Methyl parathion μg/L	<0.01	<0.01	-	0.3
2	Malathion μg/L	<0.01	<0.01	-	190
3	Chlorpyriphos μg/L	<0.01	<0.01	-	30

S.No	Parameters	Location		Standard: IS 10500:2012	
		1. Panchayati Akhara	2. Dandibagh		
4	DDT(o,p and p,p isomers of DDT DDE and DDD) µg/L	<0.01	<0.01	-	1
5	Gamma HCH µg/L	<0.01	<0.01	-	2
6	Alpha HCH µg/L	<0.01	<0.01	-	0.01
7	Beta HCH µg/L	<0.01	<0.01	-	0.04
8	Delta HCH µg/L	<0.01	<0.01	-	0.04
9	Endosulfan Sulphate (Alpha Beta and sulphate) µg/L	<0.01	<0.01	-	0.4

**Table Appendix 7-3** shows the results of the analysis on residues of pesticides in tube wells underlying agricultural fields. In both the tube wells water pesticides are not detected. That indicates the aquifer is not contaminated with pesticides used for agricultural purpose.

**Table Appendix 7-3: Results for groundwater underlying agricultural fields: pesticide residues in tube wells**

S.No	Parameters	Location		Standard: IS 10500:2012	
		3. Khiriyawa village	4. Amwan village		
	<b>Pesticide residue</b>			<b>Acceptable</b>	<b>Permissible</b>
1	Methyl parathion µg /L	<0.01	<0.01	-	0.3
2	Malathion µg/L	<0.01	<0.01	-	190
3	Chlorpyrifos µg /L	<0.01	<0.01	-	30
4	DDT(o,p and p,p isomers of DDT DDE and DDD) µg/L	<0.01	<0.01	-	1
5	Gamma HCH µg/L	<0.01	<0.01	-	2
6	Alpha HCH µg/L	<0.01	<0.01	-	0.01
7	Beta HCH µg/L	<0.01	<0.01	-	0.04
8	Delta HCH µg/L	<0.01	<0.01	-	0.04
9	Endosulfan Sulphate (Alpha Beta and sulphate) µg/L	<0.01	<0.01	-	0.4

**Table Appendix 7-4** shows physico-chemical property of wastewater. Results indicate that concentration of BOD (63.3 mg/l) is above the limit in Gaya *nallaha* (central part) water. Concentration of COD is also high in *nallaha* water. In all the *nallaha* water fluoride level is high. TSS level is also high in Gaya *nallaha* (central part) and Daharia Bighanallahawater. Presence of Pb, Mn and Fe are also high in that *nallaha* water. Concentration of Pb and Fe is also above the limit in Gaya *nallaha* (central part).

Comparing the concentrations of pollutants in the drain at Gaya city (sample 7) with those taken at Bodhgaya (samples 5 and 6) confirms the expected higher pollution originating from the former.

Comparing the results for Bodhgaya indicates the effect of dilution of drain water (sample 5) after it flows into the Phalgu River (sample 6).

**Table Appendix 7-4: Test Results for Wastewater: Physico chemical properties**

S.No	Parameters	Location			Standard CPCB discharge into inland surface water	
		5. Mochari <i>nallaha</i>	6. Daharia Bigha	7. Gaya <i>nallaha</i> at Central part		
	<b>Physico-chemical</b>					
1	Amoniacal Nitrogen as N mg/L	28.3	<0.1	48.1	-	<b>50</b>
2	BOD (27 <sup>0</sup> Cfor3 days) mg/L	8.4	3.1	63.3	-	30
3	COD mg/L	27	10.0	210.0	-	250
4	Chlorideas Cl mg/L	55.8	27.9	139.5	-	-
5	Colour Hazen unit	50	50	45	-	-
6	Conductivity as 20 <sup>0</sup> C µS/cm	440	438	1590.0	-	-
7	DO mg/L	1.5	3.4	<0.1	-	-
8	Fluoride as F mg/L	0.3	0.5	0.4	-	2.0
9	Total hardness as CaCO <sub>3</sub> mg/L	212.1	171.7	383.8	-	-
10	pH	7.67	7.73	7.75	5	9.0
11	Total Phosphates as PO <sub>4</sub> mg/L	8.24	BDL	21.90	-	-
12	SulphatesasSO <sub>4</sub> mg/L	8.3	11.1	15.8	-	-
13	TSS mg/L	90.2	204	109.6	-	100
14	TDS mg/L	279.5	246.2	975.0	-	-
15	Temperature <sup>0</sup> C	30.8	31.1	31.2	-	-
16	Nitrite as NO <sub>2</sub> mg/L	3.21	0.01	0.02	-	-
17	Residual Free chlorine mg/L	0.10	0.10	0.10	-	-
18	As mg/L	BDL	BDL	BDL	-	0.2
19	Total Chromium as Cr mg/L	BDL	0.23	0.04	-	2.0
20	Cu mg/L	BDL	0.030	0.060	-	3.0
21	Pb mg/L	0.008	<b>0.25</b>	0.038	-	0.01
22	Mn mg/L	0.27	<b>2.55</b>	0.40	-	2.0
23	Cd mg/L	BDL	BDL	BDL	-	2.0
24	Zn mg/L	0.01	0.07	0.32	-	5
25	Na mg/L	82.79	35.10	112.38	-	-
26	K mg/L	20.49	7.20	46.93	-	-
27	Ca mg/L	84.43	61.17	133.40	-	-
28	Mg mg/L	24.48	26.07	32.23	-	-
29	Fe mg/L	0.27	<b>4.27</b>	6.05	-	3
30	Oil and Grease mg/L	BDL	BDL	2.6	-	10
31	Nitrate as NO <sub>3</sub> mg/L	6.08	11.57	10.39	-	-

## Recommendations and Conclusion

From the results of present study we conclude that:

Contamination from agricultural activities

- *The aquifer underlying agricultural fields is not contaminated with pesticide and no traces are detected in the proposed water source, i.e. the bed of the Phalgu River.*

Contamination from domestic wastes - Dandibagh

- *Water from the Production Tube Well at Dandibagh (sample 2) is safe for drinking. Although waste discharges originating from Bodhgaya town (samples 5 and 6) do show appreciable contamination, the concentrations of the relevant parameters show a substantial decrease in the PTW sample. This suggests a purifying effect of the bed of the Phalgu River, both by dilution and by absorption / reduction.*

Contamination from domestic wastes – Panchyati Akhara

- *Contamination of the PTW at Panchyati Akhara (sample 1) is more pronounced than at Dandibagh. This correlates with the relatively large discharges of wastes from the adjacent urban area (sample 7). Although all relevant parameters at the PTW are still within acceptable limits, the threat from the town's waste is apparent.*
- *To protect the aquifer in the bed of the Phalgu River from further pollution, it is required to collect and treat the city's wastes in the town area that drains directly into the Phalgu.*

**NOTE**

**Gaya Water Supply Phase 2 – Water Source**

**Potential Impact from Effluent Disposal on the Water Source**

PMC, 20 November 2014

---

**1. Introduction**

To supply water to the city of Gaya, the aquifer of the river bed underlying the Phalgu River will be further developed. Additional wells will be constructed in the river bed upstream of the town.

During the environmental screening of the proposed well development works, the possibility of impact from disposal of wastewater originating at Bodhgaya, a town of about 30,000 populations some 8 km upstream of Gaya has been identified.

In this Note this potential impact is examined with the purpose to assess its significance.

**2. Technical Parameters**

**2.1 The Water Source**

**Quantities**

Average annual runoff in the Phalgu River at Gaya is estimated at 1030 million cubic meters (mcm) [Ref. 1]. The Phalgu River is a non-perennial river and does not carry surface flow during a period of 2 to 4 months each year. For the purpose of the analysis in this memo three typical moments are considered.

1. Normal river runoff. Assuming that the river carries water during 9 months a year, average daily flow would be about 3800 MLD.
2. Minimal runoff just before the river falls dry. We consider a flow of twice the total abstraction to Gaya water supply, i.e.  $2 \times 70 = 140$  MLD (see next section for the 70 MLD).
3. The river is dry and the surface flow is zero.

**Quality**

Reference 1 includes results from water quality analyses of water from the Phalgu aquifer. It concludes that the water is very good quality, has no objectionable constituents (hardness, arsenic, fluoride) and no traces of pollution (such as nitrates, bacteriological).

**2.2 Water Abstraction**

**Quantities**

Of the 80 MLD medium-term requirements for Gaya town, some 70 MLD is to be abstracted from the Phalgu aquifer. Of this, 43.5 MLD are existing wells and 26.5 MLD has to be supplied from new wells [Ref. 2]. See the map in Annex 1.

## Quality

Water supplied to Gaya shall meet the Indian Water Quality Standards.

### 2.3 Wastewater

#### Quantities

Bodhgaya is the largest town upstream of Gaya. It has about 30,000 inhabitants, about 1/10 of those in Gaya. Other settlements are small and dispersed and contribute relatively little to wastewater generation. Also, there is no industrial or important commercial establishment in the river's catchment area upstream of the proposed well field.

Till date there was no planned collection and treatment of wastewater in Bodhgaya. Wastewater was either being disposed in the ground through soak pits or found its way to the Phalgu through the storm drainage ditches. It is difficult to estimate quantities. A population of 30,000 represents a total wastewater generation of about 1.5 MLD (@ 50l/cd). It is impossible to say how much of this would reach the river. The same is valid for composition of the wastewater.

Currently a sewerage project is being implemented in Bodhgaya. A sewer network will be constructed and wastewater will be conveyed to a Sewage Treatment Plant (STP), situated near the village of Suryapur on the river's west bank. The STP site is just upstream of the production well owned by the military (MES) and about 2km upstream of the first horizontal collector well to be constructed under the project. See the map in the Appendix. The STP will be laid out in two stages, with the first stage of 10MLD capacity sufficient to meet the medium term needs [Ref. 4].

#### Quality

MBBR treatment process is considered for Bodhgaya. The aim is to meet Indian Standards for disposal of treated effluent in inland surface waters.

In the following it is assumed that these standards are indeed being met.

### 1. The Physical Process

For the analysis of potential impact from the STP on water abstracted for Gaya town, consider the following chain of events:

- The STP on the bank of the Phalgu River disposes treated effluent at a rate of 10 MLD into the river.
- The effluent is more or less mixed with the river water and flows off downstream. This will cause a dilution of the effluent.
- In case the river is dry the treated effluent will form a short stream downstream of its disposal point, gradually infiltrating into the aquifer and disappearing from the surface.
- The production tube wells for Gaya town abstract the water from the aquifer near to the underlying bedrock.
- When the river is in flow, the abstracted water is replenished by the river water.
- When the river is dry, the abstraction is not being replenished and the water table in the aquifer will gradually drop.
- In either way, the (diluted) effluent finds its way into the well. While it travels through the aquifer, the quality of this water will change.

Let's look at three scenario's.

### 3.1 Scenario 1 - Phalgu River in full flow

With an average daily flow of 3800 MLD, the effluent flow of 10 MLD will be diluted by a factor of almost 400. This situation prevails for about 7 months every year.

The diluted water will percolate into the aquifer, travel to the well and be pumped out to the town. During its journey through the aquifer the water will be purified. We will elaborate on that in Scenario 2 (the next section), because the effects are more prominent.

### 3.2 Scenario 2 - Phalgu River in low flow


#### Dilution in the river

This situation may occur for about 2 months per year. Consider a river flow of close to the total rate of water abstraction, i.e. a flow of 140 MLD. Dilution of the effluent will be by a factor 15. This means that the concentration of most of the critical parameters in the effluent drop below the permissible levels for drinking water. For example, if the effluent has a sulfate content of 1000 mg/l as per allowable standard, it will drop to 67 mg/l which is well below the desirable level for drinking water of 200 mg/l.

Other parameters, of which especially pathological contamination is of concern, may not drop sufficiently.

Because of dilution in the river, many critical quality parameters will drop below permissible levels. When the river is in full flow this effect is more pronounced.

**Figure Appendix 8-1: Phalgu River bed, water abstraction and recharge – river with surface flow**

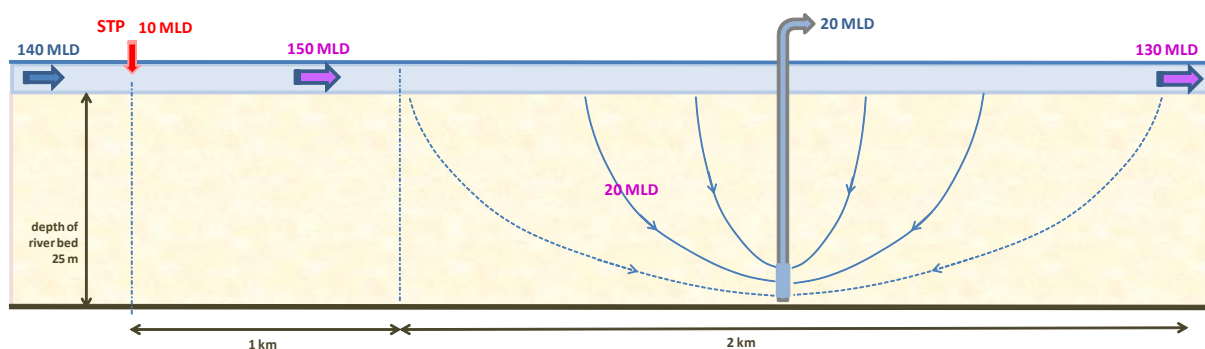

#### Flow through aquifer

**Figure Appendix 8-1** illustrates the flow through the aquifer from the river to the well screens. The retention time in the aquifer is the determining parameter. Theoretically the sphere of influence of the well is about 1 km at both sides, giving a retention time of 375 days or 12 months<sup>25</sup>. However, this is in case of an unconfined aquifer in which the water table (and hydraulic head) drops towards the well as in Scenario 3 below. In Scenario 2 it is

<sup>25</sup> Retention time: Volume (2000 x 1000 x 25 X 15%) / Flow (20 MLD) = 375 days.

different as the hydraulic head is horizontal (and at river surface level). The effect is that groundwater flow nearer to the well is relatively higher and its contribution to the flow into the well larger. By analyzing the theoretical duration of flow from the river along groundwater flow lines (the curved lines in Figure) and into the well for different horizontal distances from the well, an average retention time of 66 days seems to be representative. In other words, the zone of influence would be about 175 m on both sides of the well.

A retention time of 2 months seems a safe assumption.

#### Risk of shortcuts

There is possible that the effluent doesn't mix immediately but forms a plume in the river. When this plum flows near to the well there is a risk that disproportionately much effluent is drawn into the well. This may occur especially when traditional, single wells are used. By necessity they will be constructed in the river near to the western bank. The river channel receiving the effluent runs along the same bank.

### Purification in the aquifer

When contaminants are introduced into an aquifer, they will either move with the water, as nitrates do, or be retained on the solid matrix as generally happens to cations and organic matter. If pollutants that are retained do not break down, they will accumulate within the aquifer. This removal of pollutants in the water is generally considered as a positive impact [Ref. 5]. Pollutants that travel with the water can also break down such as microorganisms, of which especially the pathogens are of interest.

The situation we have at hand with an STP of which the effluent infiltrates into the aquifer and is then "reused" as part of the water abstracted for drinking water supply, is very similar to an artificial aquifer recharge scheme (ARS). Over the past decade quite some research has been carried out on existing ARS's and information is available that gives some insight in purification processes and their effectiveness. Some of this is represented hereunder.

**Table - Decay times for a 90% loss (T<sub>90</sub>) of pathogens and indicator microorganisms in  $\alpha$**

Pathogen/Indicator	T <sub>90</sub> (days)	
	Reedbed	ASTR
<i>E. coli</i>	4.3	0.1
<i>Enterococcus faecalis</i>	6.2	2.5
<i>Salmonella typhimurium</i>	4.7	0.7
<i>Campylobacter jejuni</i>	ND <sup>1</sup>	0.2
Coxsackievirus	ND	109
Adenovirus	32.6	59
Rotavirus	ND	185
<i>Cryptosporidium parvum</i> oocysts	87	86

<sup>1</sup> ND = Not done.




at the ASTR<sup>26</sup> site [Ref. 5].

Table shows average decay rates of pathogens and microorganisms as monitored at three aquifer recharge sites in Europe (the reedbed is not relevant). For example, the concentration of *Enterococcus faecalis* reduced to 10% of its original level within a period of 2.5 days. Or, after 10 days, the concentration would reduce by a factor 10,000.

The T90 decay time for Rotavirus was measured as 185 days of 6 months, similar to the estimated retention time at Phalgu.

Figure Appendix 8-2 shows results of investigations into the removal of organic compounds in aquifer recharge schemes. The indicator is a compound value for various organic parameters (DOC or bulk organic carbon). Results are from 6 different sites (A through F) where conditions do vary.

**Figure Appendix 8-2. DOC of effluent and final groundwater at six different demonstration sites for groundwater recharge [Ref. 5]**

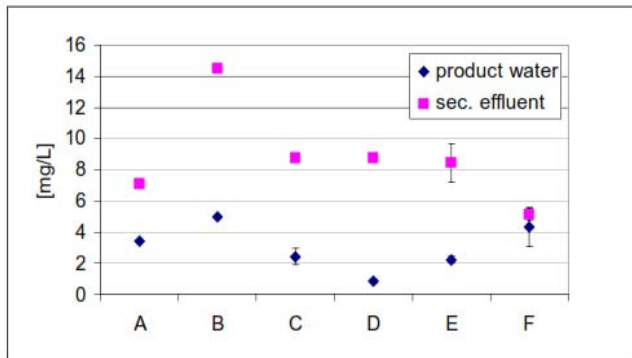

- A) Treated domestic wastewater injected by a sink hole into a fractured and karstic aquifer with relatively low residence time (< 30 days) (Nardó, Italy).
- B) Treated domestic and industrial wastewater discharged into a river and infiltrated by bank filtration into the groundwater (water is recycled for lawn irrigation) (Sabadell, Spain).
- C) Treated domestic wastewater treated by a low pressure membrane filtration (ultrafiltration, UF) prior to infiltration into a dug well with short term soil aquifer treatment (SAT retention time < 2 months) (Pilot unit, Shafdan) and
- D) at the same location and source water quality infiltration for long term SAT with 6 – 12 months of retention time (Shafdan full scale plant).
- E) At location (E) treated wastewater is processed in an integrated membrane system (UF followed by reverse osmosis) prior to pond infiltration and mid term SAT (Wulpen/Toreele Plant)
- F) Domestic wastewater, coagulated (polyaluminum chloride) and ozonated before percolation for short term SAT treatment (Gaobeidian plant).

The “secondary effluent” is usually obtained after some form of tertiary treatment. The effluent of the Bodhgaya STP will probably have higher values for DOC, but this will come down significantly once the effluent is mixed with river water. Figure (Appendix 8-3) below indicates that a further reduction can be expected in the aquifer.

<sup>26</sup> ASTR = Aquifer Storage, Transfer and Recovery

certain standard parameters can easily increase. This remineralization is intentional, in particular when the water is used for drinking water production.

When comparing the influence of the residence time (Figure 3.12) the removal performance seemed lower for retention times below 60 days.


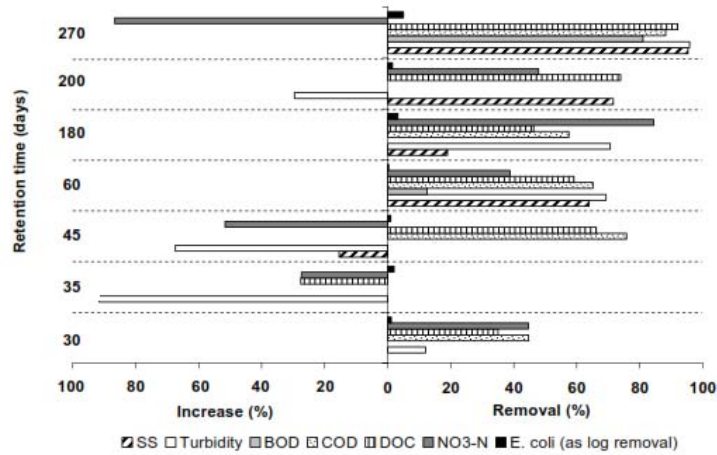


Figure 3.12 Average percentage removals or increase associated to the retention times of the sites studied.

### 3.3 Scenario 3 - Phalgu River without flow

Figure Appendix 8-4 illustrates the situation when there is no flow in the river. This may happen during 3 months per year. The effluent percolates into the river bed, trickles through the unsaturated or vadose zone and recharges the aquifer. The well abstracts 20 MLD. 10 MLD of this is replenished by the effluent, the other 10 MLD is obtained by a drop of the water level in the aquifer.

Figure Appendix 8-4: Phalgu River bed, water abstraction and recharge – no water in the river

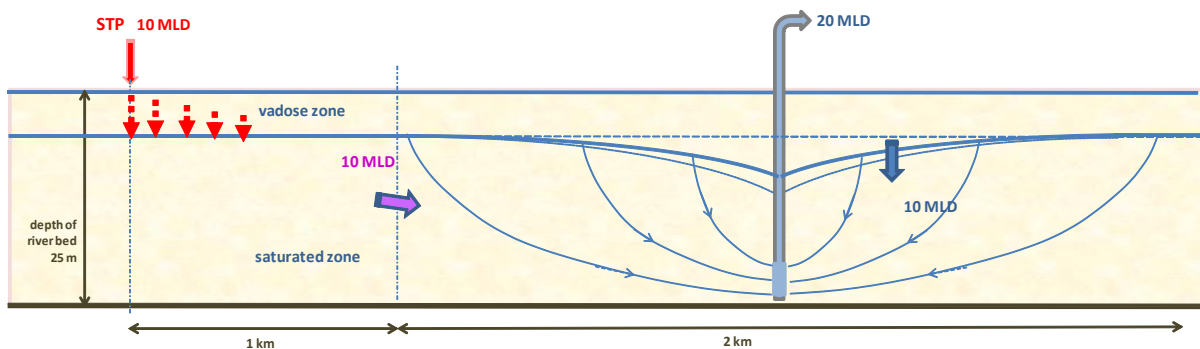

In order to simplify the analysis it is assumed that:

- All effluent will have percolated through the vadose zone and into the aquifer just upstream of the abstraction zone of the well.
- Abstraction at the well has two components:
  - 10 MLD originating from the treated effluent, upstream of the well;

- 10 MLD as a result of water level drop and flowing in from the downstream side.

### Flow through the vadose zone

There is a purifying effect when the effluent percolates through the unsaturated zone. Literature suggests that this effect is stronger in the vadose zone than in a saturated aquifer.

The depth of the vadoze zone is “zero” initially and will gradually increase to about 5 meters over the 3-month period when the river is dry and the water table gradually drops.

In the analysis the flow through the vadose zone is not considered separately, but assumed to be subject to the same process as in the saturated zone.

### Flow through the saturated zone

The key parameter is, again, the retention time. This is relevant for the treated effluent, flowing towards the well through the 1000m long aquifer upstream of the well. The retention time is about 375 days or 12 months.

### Dilution

At the well the “effluent” containing groundwater is mixed with “pure” water from the aquifer, both at a rate of 10 MLD. There is a dilution by a factor 2.

## 4. Interpretation / Conclusions

### 4.1 Findings

Below Tables show how the effluent quality indicators change during movement through sub surface zone of Phalgu River. Particularly reduction of concentrations is being noted during Phalgu River in full flow (duration of 7 months), in low flow (duration of 2 months) and without flow (duration of 3 months) condition.

#### Scenario 1 - Phalgu River in full flow duration 7 months

indicators	effluent quality	reduction by mixing factor 400	reduction in aquifer <sup>27</sup> T = 2 months	possible quality at well	Indian Standard– Drinking water
Fecal coliform	-500/100mL desirable and 2500/100 mL  Maximum permissible	maximum 2500/400 = 6/100ml	Survival time of Fecal coliform is 50 days only.	Safe	Shall not be detectable in any 100 ml sample
Nitrate	-	-	Reduction by	Safe	45 mg/l

<sup>27</sup> For a justification of the assessed reduction , please refer to the notes presented after the three tables.

			denitrification		
Sulphate	1000 mg/l	2.5	Adsorption, reduction to sulphide	Safe	200-400 mg/l
Fluoride	2.0 mg/l	0.005 mg/l	Reduction	safe	1-1.5 mg/l
Oil & Grease	10 mg/l	0.025 mg/l	Adsorption	Safe	
Sulphide	2.0 mg/l	0.005 mg/l	Absorption	Safe	0.05 mg/l
Arsenic	0.2 mg/l	0.0005 mg/l	Adsorption	Safe	0.01-0.05 mg/l
Cd	2.0 mg/l	0.005 mg/l	Adsorption	Safe	0.003 mg/l
Cu	3.0 mg/l	0.0075 mg/l	Adsorption	Safe	.05-1.5 mg/l
Ni	3.0 mg/l	0.0075 mg/l	Adsorption	Safe	0.02 mg/l
Zn	5.0 mg/l	0.0125 mg/l	Adsorption	Safe	5-15 mg/l
Ammoniacal Nitrogen	50 mg/l	0.125 mg/l	Conversion to nitrate by microbes	Safe	0.5 mg/l

### Scenario 2 - Phalgu River in low flow duration 2 months

indicators	effluent quality	reduction by mixing factor 15	reduction in aquifer <sup>3</sup> T = 2 months	possible quality at well	Indian Standard– Drinking water
Fecal coliform	-500/100mL desirable and 2500/100 mL  Maximum permissible	2500/15  =166/100ml	Number reduced  –(Ref. to note below)	Safe	Shall not be detectable in any 100 ml sample
Nitrate	-	-	Reduction by denitrification	Safe	45 mg/l
Sulphate	1000 mg/l	67 mg/l	Adsorption, reduction to sulphide	Safe	200-400 mg/l
Flouride	2.0 mg/l	0.133 mg/l	Reduction	Safe	1-1.5 mg/l

indicators	effluent quality	reduction by mixing factor 15	reduction in aquifer <sup>3</sup> T = 2 months	possible quality at well	Indian Standard– Drinking water
Oil & Grease	10 mg/l	0.666 mg/l	Adsorption	Safe	
Sulphide	2.0 mg/l	0.133 mg/l	Absorption	Safe	0.05 mg/l
Arsenic	0.2 mg/l	0.013 mg/l	Adsorption	Safe	0.01-0.05 mg/l
Cd	2.0 mg/l	0.133 mg/l	Adsorption	Safe	0.003 mg/l
Cu	3.0 mg/l	0.2 mg/l	Adsorption	Safe	.05-1.5 mg/l
Ni	3.0 mg/l	0.2 mg/l	Adsorption	Safe	0.02 mg/l
Zn	5.0 mg/l	0.333 mg/l	Adsorption	Safe	5-15 mg/l
Ammonical Nitrogen	50 mg/l	0.125 mg/l	Conversion to nitrate by microbes	Safe	0.5 mg/l

### Scenario 3 - Phalgu River without flow duration 3 months

indicators	effluent quality	reduction in aquifer <sup>3</sup> T = 12 months	reduction by mixing factor 2	possible quality at well	Indian Standard– Drinking water
Fecal coliform	-500/100mL desirable and 2500/100 mL Maximum permissible	0	0/2= 0	Safe	Shall not be detectable in any 100 ml sample
Nitrate	-	Nil (by denitrification)	-	Safe	45 mg/l
Sulphate	1000 mg/l	Nil (Adsorption, reduction to sulphide)	Nil	Safe	200-400 mg/l
Flouride	2.0 mg/l	Nil (Reduction)	Nil	Safe	1-1.5 mg/l

Oil & Grease	10 mg/l	Nil (Adsorption)	Nil	Safe	
Sulphide	2.0 mg/l	Nil (Absorption)	Nil	Safe	0.05 mg/l
Arsenic	0.2 mg/l	Nil (Adsorption)	Nil	Safe	0.01-0.05 mg/l
Cd	2.0 mg/l	Nil (Adsorption)	Nil	Safe	0.003 mg/l
Cu	3.0 mg/l	Nil (Adsorption)	Nil	Safe	.05-1.5 mg/l
Ni	3.0 mg/l	Nil (Adsorption)	Nil	Safe	0.02 mg/l
Zn	5.0 mg/l	Nil (Adsorption)	Nil	Safe	5-15 mg/l
Ammonical Nitrogen	50 mg/l	Nil (Conversion to nitrate by microbes)	Nil	Safe	0.5 mg/l

### Notes

**Fecal Coliform-** In freshwater and wastewater (20-30 degree) survival time is <60 days but usually <30 days and in soil <120 days but usually <50 days [Ref. 7].

**E-Coli-** In a recharge well survival time of E-Coli 63 days[Ref. 7].

**Nitrate-** Nitrate is basically found in the soil of high agricultural input area and high animal wastes disposal/utilization area. Nitrate is available in STP effluent. Evidence for de-nitrification as an important process affecting the differences in isotopic composition of groundwater and surface water is seen in the comparison of the nitrogen and oxygen isotopes of nitrate. Denitrification converts  $\text{NO}_3$  to  $\text{N}_2$  gas [Ref. 8].

**Sulphate and sulphite-** Sulphate is an oxidized form of sulphur. Sulphate moves through soil along with water but it reduced to Sulphite and Sulphide at sub surface zone through microbial reduction, which can't move to ground water, practically absorbed in soil. Sulphite is not harmful in general. Only after consumption of 0.7 mg/Kg body weight will produce some health impact.

**Copper** is retained in soils through exchange and specific adsorption mechanisms.

**Zinc** is readily absorbed by clay minerals, carbonates, or hydrous oxides.

**Cadmium** may be absorbed by clay minerals, carbonates or hydrous oxides of iron and manganese or may be precipitated as cadmium carbonate, hydroxide, and phosphate. Evidence suggests that adsorption mechanisms may be the primary source of Cd removal from soils [Ref. 10, 11].

**Nickel** does not form insoluble precipitates in unpolluted soil sand retention for Ni is, therefore, exclusively through adsorption mechanisms. Nickel will adsorb to clays, iron and manganese oxides, and organic matter and is thus removed from the soil solution. The formation of complexes of Ni with both inorganic and organic ligands will increase Ni mobility in soils

**Arsenic** is often present in anionic form, it does not form complexes with simple anions such as  $\text{Cl}^-$  and  $\text{SO}_4^{2-}$ . Arsenic speciation also includes organo-metallic forms such as methyl arsenic acid  $(\text{CH}_3)\text{AsO}_2\text{H}_2$  and dimethyl arsenic acid  $(\text{CH}_3)_2\text{AsO}_2\text{H}$ . Many Arsenic compounds adsorb strongly to soils and are therefore transported only over short distances in groundwater and surface water. Naidu and Bhattacharya (2006) have suggested that ferric hydroxide plays an important role in controlling the concentration of As in soil and in aqueous media

## 4.2 Conclusions

Above Tables concluded that:

- Fecal coliform concentration will be reduced to safe levels in case of all the probable conditions
- Oil and grease, sulphide, cadmium, copper, nickel, zinc,, arsenic adsorbed in soil/ silt surface and hence probability of movement through sub surface zone reduced substantially. Therefore chances of contamination of ground water from those chemicals (including heavy metals) is insignificant
- Similarly reduction of nitrate and sulphate by denitrifying and sulphur reducing bacteria before adsorption will reduce movement of those anions through soil and chances of contamination through those chemicals also became .insignificant
- Reduction of fluoride,, adsorption of sulphide and conversion of ammoniacal nitrogen to nitrate further decrease of chances of contamination of ground water from effluent
- Dilution of all parameters under variable conditions reduced concentration levels substantially to safe limits.
- ***Since movement of the metals and chemicals through sub surface zone is restricted due to above mentioned situation , chances of contamination of ground water from discharge of STP effluent is insignificant. Hence ground water is safe for drinking***

**It is recommended for long term monitoring of well water (for both chemical & biological parameters) through observation wells nearby the river or through piezometer. Frequent checking of STP effluent after treatment is necessary.**

## References

- [1] "Hydrogeological Investigation for Gaya Water Supply Project", Hydro-Geo survey Consultant Pvt. Ltd, PMC-BUDIP, June 2014.
- [2] "Gaya Water Supply Phase 2 – Water Source: planning of water source development", internal BUDIP-PMC memo, May 2014.
- [3] "Gaya Water Supply Phase 2 – Water Source, Planning of water source development", internal BUDIP-PMC memo, October 2014.
- [4] "Bodhgaya Sewerage Scheme under JNNURM Program, Detailed Project Report", CVS Design Matrix (P) Ltd., February 2009.
- [5] "Groundwater recharge with recycled municipal wastewater: criteria for health guidelines", F. Brissaud, date?.
- [6] "Water Reclamation Technologies for Safe Artificial Groundwater Recharge", RECLAIM WATER Project No. 018309, T. Melin (coordinator), June 2009.
- [7] Jackson, S.G., Goodbrand, R.B., Johnson, R.P., Odorico, V.G., Alves, D., Rahn, K., Wilson, J.B., Welch, M.K., Khakhria, R., (1998) "Escherichia coli O157:H7 diarrhea associated with well water and infected cattle on an Ontario farm" *Epidemiol. Infect.* 120: 17-20
- [8] Kendall, C., and McDonnell, J.J., (1998) *Isotope Tracers in catchment hydrology*: Amsterdam, Elsevier Science B.V., 839 p.
- [9] Eby, N.G., (2004) *Environmental geochemistry: Belmont, California*, Brooks/Cole Cengage Learning, 514 p.
- [10] Dudley, L. M., J. E. McLean, R. C. Sims and J. J. Jurinak. (1988). Sorption of copper and cadmium from the watersoluble fraction of an acid mine waste by two calcareous soils. *Soil Sci.* 145:207- 214
- [11] Dudley, L. M., J. E. McLean, T. H. Furst, and J. J. Jurinak. (1991). Sorption of Cd and Cu from an acid mine waste extract by two calcareous soils: column studies. *Soil Sci.* 151:121-135.
- [12] Naidu R, Bhattacharya P (2006). Management and remediation of arsenic from contaminated water. In Naidu R, Smith, Owens G, Bhattacharya P, Nadebaum P editors. *Managing Arsenic in the environment: from soil to human health*. Melbourne: CSIRO publishing. 327-50



Water abstraction from the Phalgu River bed: proposed abstraction zones



## Appendix 9

### Environment Impact of Transmission Mains under GWSP2 - (Bodh Gaya-Gaya)

Stretch ID.	Environment			Coordinate		Remarks
	Sensitive receptor	Impact H/M/L	Mitigation Measure if any	Latitude	Longitude	
6-7	Primary School Kendua	L	During construction, it will be needed to ensure compliance with road safety norms	24.7454296	84.9674742	
7-8	MES water supply TW	L	Measures to ensure prevention of damage to the existing pipeline need to be taken up	24.7434454	85.0152489	
	Brahmasthan temple	NIL	NIL	24.7613755	85.0023389	
	Drain Culvert	L	Pipe laying alignment may be changed for damage of culvert			For new water source pesticide contamination study in water sample will be required
8-9	NIL	NIL	NIL			
9-10	Mahesh Singh Bed college	L	Safety issue will be given priority during construction	24.7924781	85.0093019	
10-11	NIL	NIL	NIL			

### Environment Impact of Transmission Mains under GWSP-II(Manpur)

Stretch ID.	Environment			Coordinate		Remarks
	Sensitive receptor	Impact H/M/L	Mitigation Measure if any			
M1- M2	Mining Activity	M	Prevention of sand mining near the tube wells	24.7802554	85.0048982	
	Solid waste	NIL	NIL	24.7802554	85.0048982	

M1-M6	NIL	NIL	NIL			
M6-M7	NIL	NIL	NIL			
M2-M4	Solid waste	NIL	NIL			
M4-M5	Sita Kund	NIL	NIL	24.7980189	85.0041802	

## Sample Outline of Spoil Management Plan (SMP)

### 1.0 Purpose and application:

SMP is to describe how the project will manage the spoil generated and reuse related to design and construction works. This is an integral part of EMP. The objective of SMP is to reuse of spoil from works in accordance with the spoil management hierarchy outlined in this document.

### 2.0 Objectives of SMP:

The objectives of SMP are:

- To minimize spoil generation where possible
- Maximize beneficial reuse of spoil from construction works in accordance with spoil management hierarchy
- Manage onsite spoil handling to minimize environmental impacts on resident and other receivers
- Minimize any further site contamination of land, water, soil
- Manage the transportation of spoil with consideration of traffic impacts and transport related emissions

### 3.0 Structure of SMP:

Section 1: Introduction of SMP

Section 2: Legal and other requirements

Section 3: Roles and responsibilities

Section 4: Identification and assessment of spoil aspects and impacts

Section 5: Spoil volumes, characteristics and minimization

Section 6: Spoil reuses opportunities, identification and assessment

Section 7: On site spoil management approach

Section 8: Spoil transportation methodology

Section 9: Monitoring, Reporting, Review, and Improvements

### 4.0 Aspects and Potential Impacts

The key aspects of potential impacts in relation to SMP are listed in table below

Aspects	Potential Impacts
Air Quality	Potential for high winds generating airborne dust from the stock piles
Sedimentation	Potential for sediment laden site runoff from spoil stockpiles

	and potential for spillage of spoil from truck on roads
Surface and Groundwater	Contamination of water (surface and ground water)
Noise	Associated with spoil handling and haulage and storage
Traffic	Impacts associated with spoil haulage
Land Use	Potential for spoil to be transported to a receivable site that doesn't have permission for storage/disposal
Design specifications	Limitations on opportunities to minimize spoil generation
Sustainability	Limited sites for storage, reuse opportunities

## **5.0 Spoil volumes, characteristics and minimization**

5.1 Spoil volume calculations: Estimate the volumes of spoils produced from each of the construction sites.

5.2 Characterization of spoil: Based on the type of spoil; characterization is done (sand stone, mud mix materials, reusable materials)

5.3 Adopt Spoil Reduce, Reuse Opportunities

An overview of the assessment methodology to be used is mentioned below.

- Consideration of likely spoil characteristics
- Identification of possible reuse sites
- Screening of possible reuse opportunities

5.4 Identification of possible safe disposal sites for spoil: Those spoils which can't be reuse shall be properly disposed in designated areas, such disposal areas should be identified in project locations. Such disposal areas should be safe from environmental aspects and there should be any legal and resettlement related issues. Such areas need to be identified and prior client approval should be obtained to use it as spoil disposal area. The local administration must be consulted and if required permission should be obtained from them.

5.5 Storage and stock piling

5.6 Transportation and haulage route

**6.0 Based on the above, the contractor will prepare a SMP as an integral part of EMP and submit it to the DSC for their review and approval.**

## Traffic Management Plan (TMP) Template

### A. Principles

1. One of the prime objectives of this TMP is to ensure the safety of all the road users along the work zone, and to address the following issues:
  - (i) the safety of pedestrians, bicyclists, and motorists travelling through the construction zone;
  - (ii) protection of work crews from hazards associated with moving traffic;
  - (iii) mitigation of the adverse impact on road capacity and delays to the road users;
  - (iv) maintenance of access to adjoining properties
  - (v) Avoid hazards in addressing issues that may delay the project.

### B. Operating Policies for TMP


2. The following principles will help promote safe and efficient movement for all road users (motorists, bicyclists, and pedestrians, including persons with disabilities) through and around work zones while reasonably protecting workers and equipment.
  - (i) Make traffic safety and temporary traffic control an integral and high-priority element of every project from planning through design, construction, and maintenance.
  - (ii) Inhibit traffic movement as little as possible.
  - (iii) Provide clear and positive guidance to drivers, bicyclists, and pedestrians as they approach and travel through the temporary traffic control zone.
  - (iv) Inspect traffic control elements routinely, both day and night, and make modifications when necessary.
  - (v) Pay increased attention to roadside safety in the vicinity of temporary traffic control zones.
  - (vi) Train all persons that select, place, and maintain temporary traffic control devices.
  - (vii) Keep the public well informed.
  - (viii) Make appropriate accommodation for abutting property owners, residents, businesses, emergency services, railroads, commercial vehicles, and transit operations.

### C. Analyze the impact due to street closure, if required

3. Apart from the capacity analysis, a final decision to close a particular street and divert the traffic should involve the following steps:
  - (i) approval from the PIU, local administration to use the local streets as detours;
  - (ii) consultation with businesses, community members, traffic police, PWD, etc, regarding the mitigation measures necessary at the detours where the road is diverted during the construction;
  - (iii) determining of the maximum number of days allowed for road closure, and incorporation of such provisions into the contract documents;
  - (iv) determining if additional traffic control or temporary improvements are needed along the detour route;
  - (v) considering how access will be provided to the worksite;
  - (vi) contacting emergency service, school officials, and transit authorities to determine if there are impacts to their operations; and
  - (vii) developing a notification program to the public so that the closure is not a surprise. As part of this program, the public should be advised of alternate routes that commuters can take or will have to take as result of the traffic diversion.

4. If full road-closure of certain streets within the area is not feasible due to inadequate capacity of the Detour Street or public opposition, the full closure can be restricted to weekends with the construction commencing on Saturday night and ending on Monday morning prior to the morning peak period.

**Figure: Policy Steps for the TMP**

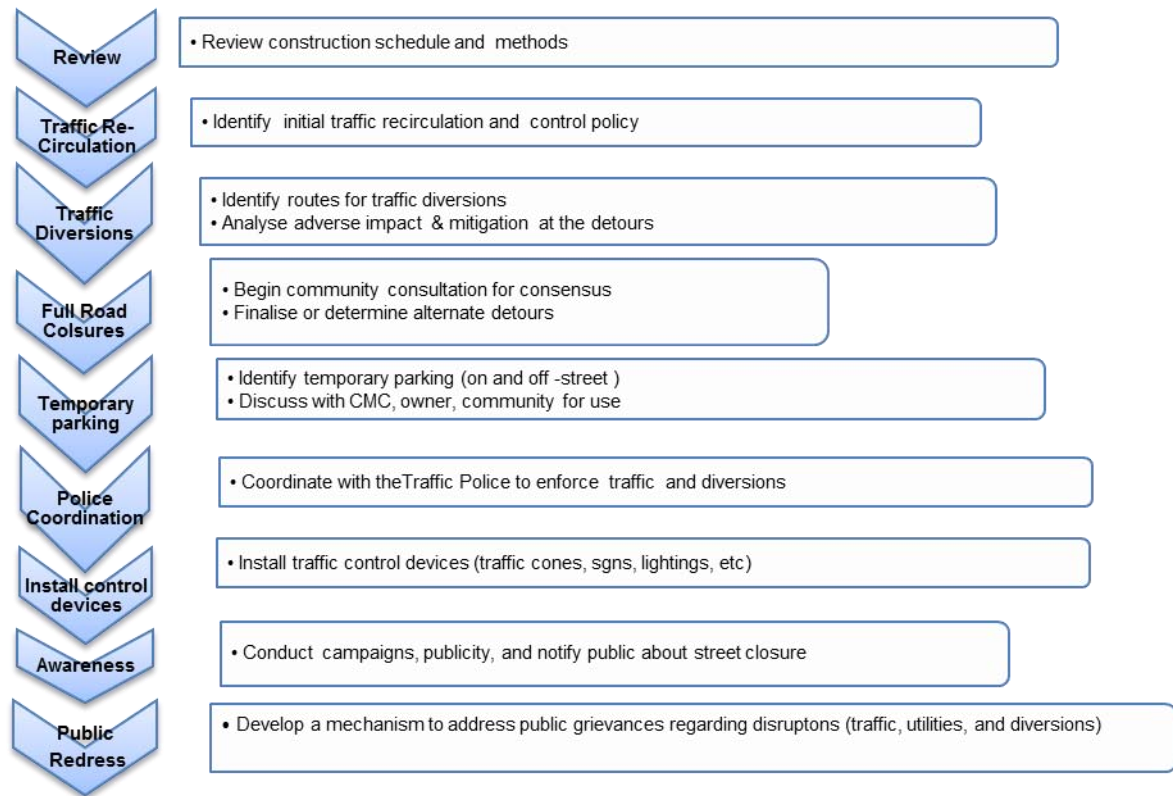

**D. Public awareness and notifications**

5. As per discussions in the previous sections, there will be travel delays during the constructions, as is the case with most construction projects, albeit on a reduced scale if utilities and traffic management are properly coordinated. There are additional grounds for travel delays in the area, as most of the streets lack sufficient capacity to accommodate additional traffic from diverted traffic as a result of street closures to accommodate the works.

6. The awareness campaign and the prior notification for the public will be a continuous activity which the project will carry out to compensate for the above delays and minimize public claims as result of these problems. These activities will take place sufficiently in advance of the time when the roadblocks or traffic diversions take place at the particular streets. The reason for this is to allow sufficient time for the public and residents to understand the changes to their travel plans. The project will notify the public about the roadblocks and traffic diversion through public notices, ward level meetings and city level meeting with the elected representatives.



7. The PMC/DSC will also conduct an awareness campaign to educate the public about the following issues:

- (i) traffic control devices in place at the work zones (signs, traffic cones, barriers, etc.);
- (ii) defensive driving behaviour along the work zones; and
- (iii) reduced speeds enforced at the work zones and traffic diversions.

8. It may be necessary to conduct the awareness programs/campaigns on road safety during construction.

9. The campaign will cater to all types of target groups i.e. children, adults, and drivers. Therefore, these campaigns will be conducted in schools and community centers. In addition, the project will publish a brochure for public information. These brochures will be widely circulated around the area and will also be available at the PIU, and the contractor's site office. The text of the brochure should be concise to be effective, with a lot of graphics. It will serve the following purpose:

- (i) explain why the brochure was prepared, along with a brief description of the project;
- (ii) advise the public to expect the unexpected;
- (iii) educate the public about the various traffic control devices and safety measures adopted at the work zones;
- (iv) educate the public about the safe road user behaviour to emulate at the work zones;
- (v) tell the public how to stay informed or where to inquire about road safety issues at the work zones (name, telephone, mobile number of the contact person; and
- (vi) indicate the office hours of relevant offices.

#### **E. Vehicle Maintenance and Safety**

10. A vehicle maintenance and safety program shall be implemented by the construction contractor. The contractor should ensure that all the vehicles are in proper running condition and it comply with roadworthy and meet certification standards of Bihar Govt./ Gol. All vehicles to be used shall be in perfect condition meeting pollution standards of Bihar Govt./ Gol. The vehicle operator requires a pre state of shift checklist. Additional safety precautions will include the requirement for:

- Driver will follow the special code of conduct and road safety rules of Government of India
- Drivers to ensure that all loads are covered and secured drivers to ensure operation equipment can't leak materials hauled
- Vehicles will be cleaned and maintained in designed places.

#### **F. Install traffic control devices at the work zones and traffic diversion routes**

10. The purpose of installing traffic control devices at the work zones is to delineate these areas to warn, inform, and direct the road users about a hazard ahead, and to protect them as well as the workers. As proper delineation is a key to achieve the above objective, it is important to install good traffic signs at the work zones. The following traffic control devices are used in work zones:

- Signs
- Pavement Markings



- Channelizing Devices
- Arrow Panels
- Warning Lights

11. Procedures for installing traffic control devices at any work zone vary, depending on road configuration, location of the work, construction activity, duration, traffic speed and volume, and pedestrian traffic. Work will take place along major roads, and the minor internal roads. As such, the traffic volume and road geometry vary. The main roads carry considerable traffic; internal roads in the new city areas are wide but in old city roads very narrow and carry considerable traffic. However, regardless of where the construction takes place, all the work zones should be cordoned off, and traffic shifted away at least with traffic cones, barricades, and temporary signs (temporary “STOP” and “GO”).

12. The work zone should take into consideration the space required for a buffer zone between the workers and the traffic (lateral and longitudinal) and the transition space required for delineation, as applicable. For the works, a 30 cm clearance between the traffic and the temporary STOP and GO signs should be provided. In addition, at least 60 cm is necessary to install the temporary traffic signs and cones.

13. Traffic police should regulate traffic away from the work zone and enforce the traffic diversion result from full street closure in certain areas during construction. Flaggers/ personnel should be equipped with reflective jackets at all times and have traffic control batons (preferably the LED type) for regulating the traffic during night time.

14. In addition to the delineation devices, all the construction workers should wear fluorescent safety vests and helmets in order to be visible to the motorists at all times. There should be provision for lighting beacons and illumination for night constructions.

15. The PIU/DSC and contractor will coordinate with the local administration and traffic police regarding the traffic signs, detour, and any other matters related to traffic. The contractor will prepare the traffic management plan in detail and submit it along with the EMP for the final approval.

**Format**

**Confirmation from Operator of Commercial establishment/shop for provision of temporary Access by Contactor**

Name of Subproject : \_\_\_\_\_  
Name of Contractor : \_\_\_\_\_  
Name of the Affected Person : \_\_\_\_\_  
Nature of Establishment : \_\_\_\_\_  
Location of Establishment : \_\_\_\_\_  
Nature of Access Disruption : \_\_\_\_\_  
Nature of Alternate Access  
Provided by Contractor : \_\_\_\_\_  
Duration & Date of Disruption : \_\_\_\_\_ days from \_\_\_\_\_ to \_\_\_\_\_

I hereby confirm that access disruption caused to my property as per the duration and the dates mentioned above was effectively mitigated by provision of alternate access by contractor. Provision of alternate access ensured no closure or loss of clientage to my commercial establishment.

**Signature of Affected person**

**Signature of Contractor's representative**

---

## Appendix 13

### Indian Standards for Drinking Water - Specification (Bureau of Indian Standard, BIS 10500: 2012)

Sl.No	Substance or Characteristic	Requirement (Desirable Limit)	Permissible Limit in the absence of Alternate source
<b>Essential characteristics</b>			
1.	Colour, ( Hazen units, Max )	5	25
2.	Odour	Unobjectionable	Unobjectionable
3.	Taste	Agreeable	Agreeable
4.	Turbidity ( NTU, Max)	5	10
5.	pH Value	6.5 to 8.5	No Relaxation
6.	Total Hardness (as CaCO <sub>3</sub> ) mg/lit.,Max	300	600
7.	Iron (as Fe) mg/lit,Max	0.3	1.0
8.	Chlorides (as Cl) mg/lit,Max.	250	1000
9.	Residual, free chlorine, mg/lit, Min	0.2	--
<b>Desirable Characteristics</b>			
10.	Dissolved solids mg/lit, Max	500	2000
11.	Calcium (as Ca) mg/lit, Max	75	200
12.	Magnesium (as Mg)mg/lit, Max.	30	100
13.	Copper (as Cu) mg/lit, Max	0.05	1.5
14.	Manganese (as Mn)mg/lit ,Max	0.10	0.3
15.	Sulfate (as SO <sub>4</sub> ) mg/lit, Max	200	400
16.	Nitrate (as NO <sub>3</sub> ) mg/lit, Max	45	100
17.	Fluoride (as F) mg/lit, Max	1.0	1.5
18.	Phenolic Compounds (as C <sub>6</sub> H <sub>5</sub> OH) mg/lit, Max.	0.001	0.002
19.	Mercury (as Hg)mg/lit, Max	0.001	No relaxation
20.	Cadmiun (as Cd)mg/lit, Max	0.01	No relaxation
21.	Selenium (as Se)mg/lit,Max	0.01	No relaxation
22.	Arsenic (as As) mg/lit, Max	0.05	No relaxation
23.	Cyanide (as CN) mg/lit, Max	0.05	No relaxation
24.	Lead (as Pb) mg/lit, Max	0.05	No relaxation
25.	Zinc (as Zn) mg/lit, Max	5	15
26.	Anionic detergents (as MBAS) mg/lit, Max	0.2	1.0
27.	Chromium (as Cr <sup>6+</sup> ) mg/lit, Max	0.05	No relaxation
28.	Polynuclear aromatic hydro carbons (as PAH) g/lit, Max	--	--
29.	Mineral Oil mg/lit, Max	0.01	0.03
30.	Pesticides mg/l, Max	Absent	0.001
31.	Radioactive Materials		
	i. Alpha emitters Bq/l, Max	--	0.1
	ii. Beta emitters pci/l,Max	--	1.0
32.	Alkalinity mg/lit. Max	200	600
33.	Aluminium (as Al) mg/l,Max	0.03	0.2
34.	Boron mg/lit, Max	1	5

## RECORDS OF PUBLIC CONSULTATION-GAYA

### **Subproject: Improvement of Water supply system in Gaya City- GWSP2**

**Date & Time:** 19.08.2015, 31.08.2015 & 01.09.2015 From 11-00 PM to 3-00 PM

Various issues related to the proposed subproject were discussed at various locations of the subproject area. Discussions were held with the parties directly and indirectly affected by the subproject execution as well as the general public of the subproject area. The problems faced by them along with their suggestions/concerns were recorded and the same have been given due consideration during formulation of the project design, IEE and EMP.

The participants, in general were in favour of the upcoming subproject at Gaya. However, they were concerned about the permanent and temporary impacts which are expected to arise during construction stage. People are ready to extend all types of support during execution of the project. The details of the public consultation are detailed below:

#### **Issues discussed- Dharamshala (Warish nagar)**

- **Water quality-** As per discussion by public living near proposed tube well site on bank of river. One hand pump is situated on the bank and as per record of view of public the water quality is good and no diseases were found since long time by use of the Hand pump water.
- **Water Depth-**As per public record water is available at 30-40 feet depth in the river
- **Water Testing-**General Public requested for testing of water quality.
- **Employment of general public-**People are interested to do work on project area during construction

#### **Issues discussed-Govt Middle school Kendui**

- **Awareness about the project-**Discussed general awareness about the project
- **Safety of School children-**Issue of safety of school children during laying of pipeline were discussed
- **Availability of water for school children and Tariff-** School teachers are interested for availability of drinking water for school children through this project.

#### **Issues discussed - Industrial Training Institute ( ITI) Campus , Bodhgaya Road, Gaya**

- **Awareness about the project-** Discussed general awareness about the project
- **Safety of School students-** Issue of safety of ITI students were discussed
- **Availability of water for school children and Tariff-** ITI Principal interested for availability of drinking water for ITI students, and staffs through CWR.

#### **Issues discussed-Budva Mahadev**

- **Awareness about the project-**Discussed general awareness about the project
- **Tree cutting-**1-2 tree are under project area..Tree cutting permission will be taken

from forest department, Gaya. People are agreed for tree cutting.

- **Water quality-** Present drinking water problem and current water quality is not good .Local people needs supply water.
- **Employment of general public-**People are interested to do work on Tube well site during construction

#### Issues discussed-Bhusunda

- **Awareness about the project-**Discussed about general awareness about the project
- **Employment of general public-**People are interested to do work on Tube well site during construction
- **Safety-**during construction safety issue of general public will be required in the approach road area.(as given in GWSP-1)



Consultation - ITI



Consultation- Govt School Kendui



Consultation- Govt School Kendui



Dharamashala near TW



Dharamashala near TW



Dharamashala near TW



Budva Mahadev



Bhusunda near TW



Madanpore More ward 44

## Summary of General and specific discussion

1. Issues: Problems faced due to absence of the proposed facility under the subproject
  - ✓ Feedback:
    - The quality and quantity of the water supplied at present is not adequate. Supply from new Kirloskar tube well is expected at few locations
    - New settlements mostly in the peripheries of the town lack proper water production and water storage infrastructure.
  - ✓ Remarks
    - The participants in general were of the view that the proposed new tube wells is the definite need and welcomed the subproject and ensured their full support.
2. Issues: Awareness and extent of knowledge about the subproject
  - ✓ Feedback
    - Local people are not much aware on components of the project.
  - ✓ Remarks
    - Public consultation in different forms like one to one consultation, circulations of questionnaire, group discussions, etc. need to be a continuous process and IA will ensure this process throughout the project execution.
3. Issues: Information on the perceived benefits of the subproject in terms of economic and environmental enhancement
  - ✓ Feedback:
    - General benefits perceived by the people are summarized as follows:
      - Improvement in the water supply scenario will solve the issues and problems related to the unsatisfactory quantity and quality of the water supplied.
      - It is hoped that adequate provisions will be made for satisfactory and standardized filtration and purification of the water which will be supplied in future.
      - The improvement in the water supply will provide safety to the people as they will be not at the risk of water borne diseases.
      - Areas of new settlements will get highly benefited with the proposed subproject.
      - Proposed infrastructure will ensure overall health and hygiene of the people in the subproject area.
  - ✓ Remarks
    - People impacted directly or indirectly due to subproject implementation should be adequately compensated.
    - During implementation, maximum efforts should be made to minimize hindrances of public access by providing alternative access to roads, streets and homes.
    - The work should be carried out at a fast pace so that the duration of access disruption is minimized.
    - People suggested an efficient operation and maintenance system after the completion of the project
4. Issues: Information on perceived losses from the proposed subproject during execution stage in terms of disruptions in traffic, temporary access disruptions during execution and air and noise pollution, etc.
  - ✓ Feedback:
    - People opined that potential temporary impacts of access disruption for residences, shops/commercial establishments, and institutions, etc. should be mitigated through good construction practices and an effective environment and contractors construction plan which should ensure providing walkways and metal sheets to maintain access across trenches, increasing the workforce in front of shops/commercial establishments, consulting business and institutions regarding operating hours and factoring this in work schedules, providing advance information on works to be undertaken including appropriate signages etc.
  - ✓ Remarks

- Effective mitigation measure should be in place so that problems related to traffic disruptions; air and noise pollution are minimized.
5. Issues: Presence of any historical/cultural site in the vicinity  
Presence of any protected area in or adjoining the construction site.
- ✓ Feedback:
    - There is no historical/cultural site in the corridor of the subproject.
    - There is no protected area in the corridor of the subproject.
  - ✓ Remarks
    - There are some sensitive receptors which include few educational institutions, health centers, religious places etc. in the project area for which proper mitigation measures relevant to the location and nature of the receptor will be kept in place during project execution and same will be part of EMP.

**Suggestion from general public & stakeholders – Consideration in impact assessment**

- Public consultation in different forms like one to one consultation, circulations of questionnaire, group discussions, etc. need to be a continuous process and IA will ensure this process throughout the project execution.
- People impacted directly or indirectly due to subproject implementation should be adequately compensated.
- During implementation, maximum efforts should be made to minimize hindrances of public access by providing alternative access to roads, streets and homes.
- The work should be carried out at a fast pace so that the duration of access disruption is minimized.
- Efficient O & M system needs to be establish
- Effective mitigation measure should be in place to mitigate problems related to traffic disruptions
- air and noise pollution should be minimized
- For sensitive receptors like educational institutions, health centers, religious places etc. in the project area for which proper mitigation measures relevant to the location and nature of the receptor will be kept in place during project execution and same will be part of EMP.





**List of the Participants in Public Consultation**

**Subproject Name:** Improvement of Water Supply System in Gaya City

**Location of Meeting/Consultation:** Bazish Nagar - Bhaumshala

**Date & Time:** 1/9/2015

Sl. No	Name & Address	Occupation	Signature
1.	शिवराम मोरारज झाबर	शासकिका.	शिवराम मोरारज
2.	मोहन मोहन झाबर	भजूरी	MOHN
3.	विजय झाबर	भजूरी	
4.	मीना देवी	घरवात	मीना देवी
5.	रजु देवी	घरवात	रजु देवी
6.	कानि देवी	घरवात	
7.	नवीन झाबर	भजूरी	नवीन झाबर
8.	बिजू झाबर	भजूरी	
9.	देवकी झाबर	भजूरी	देवकी झाबर
10.	दिनेश झाबर	शासकिका	दिनेश झाबर
11.	गीता झाबर	शासकिका	गीता झाबर
12.	सुकमीनी देवी	घरवात	सुकमीनी देवी




**List of the Participants in Public Consultation**

**Subproject Name:** Improvement of Water Supply System in Gaya City

**Location of Meeting/Consultation:**

**Date & Time:** 1/9/2015

Sl. No	Name & Address	Occupation	Signature
1.	आरती देवी	गृहणी	आरती देवी
2.	अनिल राह	राजमिस्त्री	अनिल राव मुन्ना प्रसाद
3.	मुन्ना प्रसाद	भण्डारी	
4.	मदन प्रसाद	भण्डारी	मदन प्रसाद
5.	उषा देवी	गृहणी	उषा देवी
6.	रामसर	भण्डारी	

**List of the Participants in Public Consultation**

**Subproject Name:** Improvement of Water Supply System in Gaya City

**Location of Meeting/Consultation:** Govt. Middle School - Kendaui

**Date & Time:** 1/9/2015

Sl. No	Name & Address	Occupation	Signature
1.	संजय कुमार शर्मा पुस्तकालय राजमिस्त्री	Teaching	संजय कुमार शर्मा
2.	पुरारी मिश्र सह शिक्षक	"	पुरारी मिश्र 1/9/2015
3.	RINA KUMARI NAGAR TEACHER	"	Rina Kumari
4.	KUMARI PREMLALA NAGAR TEACHER	"	kumari premlala
5.			

List of the Participants in Public Consultation

Subproject Name: Gaya Water Supply

Location of Meeting/Consultation: Bhusanda

Date & Time: 6/2/2015 5 PM to 6 PM





Sl. No	Name & Address	Occupation	Signature
1.	श. न. पु. न. च. अ. डी	-	श. न. पु. न. च. अ. डी
2.	मीरा देवी	-	मीरा देवी
3.		-	2
4.	श. वि. न. ड. पा. डे. च.	-	श. वि. न. ड. पा. डे. च.
5.	रेणु देवी	-	रेणु देवी
6.	उषा कुमारी	-	उषा कुमारी
7.	कमलेश	-	कमलेश चौधरी
8.	बिरेन्द्र	-	Birendra Singh
9.	सस्ती देवी	-	सस्ती देवी
10.	गीता देवी	-	गीता देवी
11.	सोनी कुमारी	-	सोनी कुमारी
12.	सौरभ कुमार	-	सौरभ कुमार

List of the Participants in Public Consultation

Subproject Name: Gaya Water Supply

Location of Meeting/Consultation: Bhaswala Mela

Date & Time: 23/2/2015

Sl. No	Name & Address	Occupation	Signature
1.	कमलेश चौधरी मण्डूरी	मण्डूरी	
2.	कुन्ती देवी	गृहणी	
3.	सन्तपुजन चौधरी	मण्डूरी	Santpujan
4.	अरवीलेश चौधरी	मण्डूरी	अरविलेश चौधरी
5.	कृष्ण चौधरी	मण्डूरी	
6.	अनील चौधरी	मण्डूरी	अनील चौधरी
7.	जय प्रकाश चौधरी	व्यवसाय	Jayprakash Choudhary
8.	सुनीता देवी	व्यवसाय	सुनीता देवी
9.	मंजू देवी	ढाई	
10.	वेणी कुमारी	गृहणी	वेणी कुमारी
11.	इमाम फूल देवी	मण्डूरी	
12.	Gita davi	House wife	Gita davi
13.	मुनी देवी	गृहणी	मुनी देवी
14.	मालती देवी	गृहणी	मालती देवी

List of the Participants in Public Consultation

Subproject Name: Gaya Water Supply

Location of Meeting/Consultation: Budva Mahadev

Date & Time: 24/2/2015

Sl. No	Name & Address	Occupation	Signature
1.	अबुल क़ादिर मोहम्मद	शिक्षक	عبد القادر
2.	MD. SUHAEL ALAM	शिक्षक	Md. Suhail Alam
3.	VIRENDRA VERMA	शिक्षक	<del>virendra verma</del> virendra verma
4.	मोहम्मद अबुल क़ादिर	शिक्षक	عبد القادر
5.	शाहजहाँ	अध्यापक	
6.	शाबिना	अध्यापक	
7.	मोहम्मद अबुल क़ादिर	शिक्षक	عبد القادر
8.	मोहम्मद अबुल क़ादिर	शिक्षक	عبد القادر
9.	Md. Shamin	शिक्षक	Md. Shamin
10.	मोहम्मद	अध्यापक	عبد القادر
11.	अबुल क़ादिर	शिक्षक	عبد القادر
12.			

**LIST OF PARTICIPANTS IN PUBLIC CONSULTATION**

**SUBPROJECT NAME:**

**LOCATION OF MEETING/CONSULTATION:** Ward No - 44

**DATE & TIME:** 9:30 AM  
10/11/2014

S.NO	Name & Address	Occupation	Signature
1	Prem Kumar, Muni HEM	Study	Prem KR
2	दिनेश पासवान, मूखी हिल	उद्योग, Vendor	दिनेश
3	बेनी माधो मालाकार	-	बेनी माधो
4	राजेश कुमार मंगमा जोरी मन्दिर	चाकला प दुकानदार	Rajesh Kumar
5	जबलु कुमार	उद्योग - दुकानदार	मौ. अंगोला जोरी
6	Anshu Kumar	इन्जिनियर	Anshu
7	मनोज गौरी तम्बे (MAYAN)	STUDENT	Anshu Kumar
8	ARUN KUMAR YADAV	STUDENT (सामाजिक कार्यकर्ता)	ANARAN Pun
9	मन्मथ मन्मथ	9858984066	मन्मथ मन्मथ
10	नरेश कुमार	वकील	नरेश
11	पुनीप कुमार (सा.स.न.पुर)	शेकी दुकान	पुनीप कुमार
12	Pintoo	Kingara Anthon	Pintoo
13	Ramekant Puhakar	Business	Ramekant
14	Vikash Anand	Student	Vikash Anand
15	Prabh Kumar	S. Health	Prabh Kumar
वार्ड 40			
16	दुमोदर लाल गोतवाम	पण्डाजी	दुमोदर लाल गोतवाम
17	सुभाष कुमार उता	उद्योग	सुभाष कुमार उता
18	विनये कुमार गुप्ता	उद्योग 9974215738	(B.K. Gupta)
19	Ashim K. Chakrabarty	Business	Ashim K. Chakrabarty
20	कल्याणलाल गुप्ता	उद्योग दुकान	कल्याणलाल गुप्ता
21	सुरेश प्रसाद	दुकान	सुरेश प्रसाद
22	सजय लाल गुप्ता	पण्डाजी	सजय लाल गुप्ता
23	जोषाल प्रसाद	-	जोषाल प्रसाद
24	सुरेश प्रसाद	-	सुरेश प्रसाद
25	मनोहर सुभाष प्रसाद	-	मनोहर सुभाष प्रसाद
26	शशि सुभाष प्रसाद	-	शशि सुभाष प्रसाद



## Appendix 15: Sample Grievance Registration Form

(To be available in Hindi, Urdu and English or local language, if any)

The **Bihar Urban Development Investment Program (BUDIP)** welcomes complaints, suggestions, queries and comments regarding project implementation. We encourage persons with grievance to provide their name and contact information to enable us to get in touch with you for clarification and feedback.

Should you choose to include your personal details but want that information to remain confidential, please inform us by writing/typing **\*(CONFIDENTIAL)\*** above your name. Thank you.

<b>Date</b>		<b>Place of registration</b>			
<b>Contact Information/Personal Details</b>					
<b>Name</b>		<b>Gender</b>	<b>Male</b>	<b>Female</b>	<b>Age</b>
<b>Home Address</b>					
<b>Village / Town</b>					
<b>District</b>					
<b>Phone no.</b>					
<b>E-mail</b>					
<b>Complaint/Suggestion/Comment/Question Please provide the details (who, what, where and how) of your grievance below:</b>					
If included as attachment/note/letter, please tick here:					
<b>How do you want us to reach you for feedback or update on your comment/grievance?</b>					

### FOR OFFICIAL USE ONLY

<b>Registered by: (Name of official registering grievance)</b>	
<b>If – then mode:</b>	
<input type="checkbox"/> <b>Note/Letter</b>	
<input type="checkbox"/> <b>E-mail</b>	
<input type="checkbox"/> <b>Verbal/Telephonic</b>	
<b>Reviewed by: (Names/Positions of Official(s) reviewing grievance)</b>	
<b>Action Taken:</b>	
<b>Whether Action Taken Disclosed:</b>	<input type="checkbox"/> <b>Yes</b> <input type="checkbox"/> <b>No</b>
<b>Means of Disclosure:</b>	

### GRIVENCES RECORD AND ACTION TAKEN

Sr. No.	Date	Name and Contact No. of Complainer	Type of Complain	Place	Status of Redress	Remarks

(हिंदी, उर्दू और अंग्रेजी या स्थानीय भाषा में उपलब्ध हो, यदि कोई हो, )  
 बिहार शहरी विकास निवेश कार्यक्रम (BUDIP) शिकायतें, सुझाव,  
 प्रश्नों और परियोजना के कार्यान्वयन के बारे में टिप्पणियों का स्वागत करता है। हम लोगों को शिकायत के साथ उनके नाम और संपर्क जानकारी प्रदान करने के लिए प्रोत्साहित करते हैं ताकि हम स्पष्टीकरण और प्रतिक्रिया के लिए आपके साथ संपर्क कर सकें।  
 आपको अपने व्यक्तिगत विवरण शामिल करने चाहिए लेकिन उस जानकारी को गोपनीय रखा जायगा। आपका नाम ऊपर (गोपनीय)  
 \* लेखन / टाइपिंग द्वारा हमें सूचित करें धन्यवाद

तारीख			पंजीकरण का स्थान		
संपर्क करने संबंधी जानकारी / व्यक्तिगत विवरण					
नाम		लिंग	पुरुष महिला	आयु	
घर का पता					
गांव / शहर					
जनपद					
फोन नं.					
ईमेल					
शिकायत / सुझाव / टिप्पणी / प्रश्न की अपनी शिकायत का विवरण (जो, क्या, कहां और कैसे) प्रदान करें: सलगनक / नोट / पत्र के रूप में, शामिल हैं, कृपया यहाँ टिक करें					
हम आप तक प्रतिक्रिया के लिए कैसे पहुँच सकते हैं या अपनी टिप्पणी / शिकायत पर नवीनीकरण? केवल कार्यालय उपयोग के लिए					

द्वारा पंजीकृत: (सरकारी पंजीकरण शिकायत का नाम)	
यदि - फिर विधि:	
<input type="checkbox"/> नोट / पत्र <input type="checkbox"/> ईमेल <input type="checkbox"/> मौखिक / टेलीफोन	
से समीक्षित: (नाम / अधिकारी की पोजिशन समीक्षा शिकायत)	
की गई कार्रवाई:	
की गई कार्रवाई का खुलासा:	<input type="checkbox"/> हाँ <input type="checkbox"/> नहीं
प्रकटीकरण का मतलब:	
शिकायत रिकॉर्ड और की गई कार्रवाई	

क्रम संख्या	तारीख	नाम और complainer का संपर्क नंबर	शिकायत के प्रकार	जगह	निवारण की स्थिति	टिप्पणियाँ

## Appendix 16

### Semi-Annual Environmental Reporting Format

#### I. INTRODUCTION

- Overall project description and objectives
- Description of subprojects
- Environmental category of the sub-projects

- Details of site personnel and/or consultants responsible for environmental monitoring
- Overall project and sub-project progress and status

No.	Sub-Project Name	Status of Sub-Project				List of Works	Progress of Works
		Design	Pre-Construction	Construction	Operational Phase		
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		

Compliance status with National/ State/ Local statutory environmental requirements

No.	Sub-Project Name	Statutory Environmental Requirements	Status of Compliance	Action Required

Compliance status with environmental loan covenants

No. (List schedule and paragraph number of Loan Agreement)	Covenant	Status of Compliance	Action Required

## II. COMPLIANCE STATUS WITH THE ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN

- Provide the monitoring results as per the parameters outlined in the EMP. Append supporting documents where applicable, including Environmental Site Inspection Reports.
- There should be reporting on the following items which can be incorporated in the checklist of routine Environmental Site Inspection Report followed with a summary in the semi-annual report send to ADB. Visual assessment and review of relevant site documentation during routine site inspection needs to note and record the following:

- (i) What are the dust suppression techniques followed for site and if any dust was noted to escape the site boundaries?
- (ii) If muddy water was escaping site boundaries or muddy tracks were seen on adjacent roads;



- (iii) Adequacy of type of erosion and sediment control measures installed on site, condition of erosion and sediment control measures including if these were intact following heavy rain;
- (iv) Are there designated areas for concrete works, and re-fuelling?
- (v) Are there spill kits on site and if there are site procedures for handling emergencies;
- (vi) Is there any chemical stored on site and what is the storage condition?
- (vii) Is there any dewatering activities if yes, where is the water being discharged;
- (viii) How are the stockpiles being managed?
- (ix) How is solid and liquid waste being handled on site?
- (x) Review of the complaint management system;
- (xi) Checking if there are any activities being under taken out of working hours and how that is being managed.

## Summary Monitoring Table –Water supply subproject

### A. Pre-construction Stage

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
Legislation, permits and agreements	Proof of compliance to Air Act & Noise Act must be forwarded by the contractor to PMU/PMC/PIU (in relation to hot mixing, batch mix plants, stone crushers, diesel generators, etc. if any)					
	Proof of Forest land clearance, NOC from forest Dept.					
	A copy of the EMP must be kept on site during the construction period					
Water Source Sustainability	Study on availability of quality water from Phalgu river bed For protection of sub surface water source construction of Sewage Treatment Plant (STP) should be taken up and city's waste water will be treated before discharge into the Phalgu river					
Access to site	Access to site will be via existing roads. The Contractor will need to ascertain the existing condition of the roads and repair damage due to construction.					
	The Local Traffic Police Department shall be involved in the planning stages of the road closure					
	The Local Traffic Department must be informed at least a week in advance if the traffic in the area will be affected					
	The location of all affected services must be identified and confirmed.					
	All roads for construction access must be planned and approved by the Engineer and its Environmental Specialist ahead of construction activities.					
	No trees, shrubs or groundcover may be removed or vegetation stripped without the prior permission of the Engineer/Environmental Specialist					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	Contractors shall construct formal drainage for all temporary haulage roads in the form of side drains to prevent erosion and discharge of run-off.					
Setting up of construction camp	Choice of site for the Contractor's camp requires the Engineer's/ ES permission and must take into account location of local residents, businesses and existing land uses, including flood zones and slip / unstable zones. A site plan must be submitted to the Engineer for approval.					
	The construction camp may not be situated on a floodplain or on slopes greater than 1:3.					
	In case of camp site on private land, contractor must get prior permission from both the Engineer/ ES and the landowner.					
	The construction camp comprised of: <ul style="list-style-type: none"> <li>• site office</li> <li>• designated first aid area</li> <li>• eating areas</li> <li>• storage areas</li> <li>• batching plant (if required)</li> <li>• refueling areas (if required)</li> <li>• maintenance areas (if required)</li> <li>• crushers (if required)</li> </ul>					
	Cut and fill must be avoided where possible during the set up of the construction camp.					
	The camp must be properly fenced and secured					
	The Contractor shall make adequate provision for temporary toilets (gender specific) for the use of their employees during the Construction Phase.					
	Surrounding bushes not to be used as a toilet facility.					
Bins shall be provided at convenient intervals for disposal of waste within the construction camp.						

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	Recycling and the provision of separate waste receptacles for different types of waste					
Establishing equipment lay-down and storage area	Choice of location for equipment lay-down and storage areas must take into account distances to adjacent land uses, general onsite topography and water erosion potential of the soil. Impervious surfaces must be provided where necessary.					
	Storage areas shall be secure so as to minimize the risk of crime.					
	Residents living adjacent to the construction site must be notified of the existence of the hazardous storage area.					
	Equipment lay-down and Storage areas must be designated, demarcated and fenced if necessary.					
	Fire prevention facilities must be present at all storage facilities.					
	Proper storage facilities for the storage of oils, paints, grease, fuels, chemicals and any hazardous materials to be used					
	These storage facilities (including any tanks) must be on an impermeable surface that is protected from the ingress of storm water from surrounding areas in order to ensure that accidental spillage does not pollute local soil or water resources.					
	Staff dealing with these materials / substances must be aware of their potential impacts and follow the appropriate safety measures.					
Materials management – sourcing	Contractors shall prepare a source statement indicating the sources of all materials (including sands, natural gravels, crushed stone, asphalt, clay liners, etc), and submit these to the Engineer for approval prior to commencement of any work.					
	Prioritize sites already permitted by the Mining Department					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	If other sites are necessary, inform construction contractor that it is their responsibility to verify the suitability of all material sources and to obtain the approval of DSC					
	Where possible, a signed document from the supplier of natural materials shall be obtained confirming that they have been obtained in a sustainable manner and in compliance with relevant legislation (e.g Consent to operate by crusher)					
Education of site staff on general and environmental conduct	Ensure that all site personnel have a basic level of environmental awareness training.					
	Staff operating equipment (such as excavators, loaders, etc.) shall be adequately trained and sensitized to any potential hazards associated with their task.					
	All employees must undergo safety training and wear the necessary protective equipments (e.g helmets, gloves, gumboots, nose mask, ear plugs as per type of work) and clothing.					
	<p>A general regard for the social and ecological well-being of the site and adjacent areas is expected of the site staff. Workers need to be made aware of the following general rules:</p> <ul style="list-style-type: none"> <li>• no alcohol/drugs on site;</li> <li>• prevent excessive noise;</li> <li>• construction staff are to make use of the facilities provided for them, as opposed to ad hoc alternatives (e.g. fires for cooking, the use of surrounding bushes as a toilet facility);</li> <li>• no fires permitted on site;</li> <li>• trespassing on private/commercial properties adjoining the site is forbidden;</li> <li>• other than pre-approved security staff, no workers shall be permitted to live on the construction site; and</li> <li>• no worker may be forced to do work that is potentially</li> </ul>					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	dangerous or that he/she is not trained to do.					
Social impacts	Open liaison channels shall be established between the contractors and interested and affected parties such that any queries, complaints or suggestions can be dealt with quickly and by the appropriate person(s).					
	Road closure (if any) together with the proposed detour needs to be communicated via advertising, pamphlets, radio broadcasts, road signage, etc.					
	Advance road signage indicating the road detour and alternative routes (if required). Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/ complaints.					
	Storage facilities and other temporary structures on site shall be located such that they have as little visual impact on local residents as possible.					
Noise impacts	Construction vehicles are to be fitted with standard silencers prior to the beginning of construction.					
	Equipment that is fitted with noise reduction facilities (e.g. side flaps, silencers, etc) will be used as per operating instructions and maintained properly during site operations					
Conservation of the natural environment	No vegetation may be cleared without prior permission from the Engineer.					
	Trees that are not to be cleared shall be marked beforehand with danger tape.					
Set-up of waste management procedure	The excavation and use of rubbish pits on site is forbidden.					
	Burning of waste is forbidden.					
Social and Cultural Resources	Consult Archaeological Survey of India (ASI) or concerned dept. of Tripura Govt. to obtain an expert assessment of the archaeological potential of the site; Consider alternatives if the site is found to be of medium or high risk;					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.					
Occupational health & safety	Comply with IFC EHS Guidelines on Occupational Health and Safety					
	Develop comprehensive site-specific health and safety (H&S) plan.					
	Provide medical insurance coverage for workers					
Security and safety	Lighting on site is to be set out to provide maximum security and to enable easier policing of the site, without creating a visual nuisance to local residents or businesses.					
	Material stockpiles or stacks, such as, pipes must be stable and well secured to avoid collapse and possible injury to site workers / local residents.					
	Flammable materials shall be stored as far as possible from adjacent residents / businesses.					
	All interested and affected parties shall be notified in advance of any known potential risks associated with the construction site and the activities on it. Examples are: <ul style="list-style-type: none"> <li>stringing of power lines</li> <li>earthworks / earthmoving machinery on steep slopes above houses / infrastructure</li> <li>risk to residences along haulage roads / access routes</li> </ul>					
Core Labour Standard (CLS)- safety and compliance	Monitoring compliance with national labor laws and regulations, provided that these national laws are consistent with CLS. DSC will ensure that bidding and contract documents include specific provisions requiring contractors to comply with all: (i) applicable labor laws and core labor standards on: (a) prohibition of child labor as defined in national legislation for construction and maintenance activities; (b) equal pay for equal work of equal value					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	regardless of gender, ethnicity or caste; and (c) elimination of forced labor; and (ii) the requirement to disseminate information on sexually transmitted diseases including HIV/AIDS to employees and local communities surrounding the project sites.					

**B. Construction Stage**

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
Climatic impact	<ul style="list-style-type: none"> <li>✓ Seasonal climatic variations will be considered during scheduling of construction activities in the area.</li> <li>✓ Consideration of suitable season (non monsoon /lien period) for major construction activity</li> <li>✓ Excavations and other clearing activities will only be done during agreed working times and permitted weather conditions.</li> <li>✓ Storm water control (through drainage, diversion) during construction phase as per the method approved by the Engineer.</li> </ul>					
Maintenance of construction camp and work site	The Contractor must monitor and manage drainage of the camp site to avoid standing water and soil erosion.					
	Run-off from the camp site must not discharge into neighbors' properties.					
	Toilets are to be maintained in a clean state and shall be moved to ensure that they adequately service the work areas.					
	Drinking water facility needs to be maintained at camp and work site					
	Open areas or the surrounding bushes are not being					



Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	used as toilet facility.					
	All litter is collected from the work and camp areas daily.					
	Bins shall be emptied regularly and waste shall be disposed of at the pre-approved site.					
	Eating areas shall be regularly serviced and cleaned to ensure the highest possible standards of hygiene and cleanliness.					
	Camp and working areas are kept clean at all times.					
Staff conduct	Performance of construction workers to ensure that the points relayed during their induction have been properly understood and are being followed.					
	The rules that are explained in the worker conduct section, must be followed at all times					
Dust and air pollution	Consult with DSC/PIU on the designated areas for stockpiling of clay, soils, gravel, and other construction materials					
	Damp down exposed soil and any stockpiled on site by spraying with water when necessary during dry weather					
	Avoiding the need to stockpile on site					
	Use tarpaulins to cover sand and other loose material when transported by trucks					
	Fit all heavy equipment and machinery with air pollution control devices which are operating correctly and regular servicing of the vehicles& equipments off site in order to limit gaseous emissions					
	Excess earth and other windblown loads in transit will be kept covered					
	No fires are allowed on site					
Noise Level	Plan activities in consultation with DSC/PIU so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance; Require horns not be used unless it is necessary to					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	warn other road users or animals of the vehicle's approach; Minimize noise from construction equipment by using vehicle silencers, fitting jackhammers with noise-reducing mufflers, and portable street barriers the sound impact to surrounding sensitive receptor; Ensure that machinery is in a good state of maintenance. Monitor noise levels in potential problem areas, and Maintain maximum sound levels not exceeding 80 decibels (dbA) when measured at a distance of 10 m or more from the vehicle/s.					
Storm water	Earth, stone and rubble is to be properly disposed off so as not to obstruct natural water pathways over the site					
	During construction, un-channeled flow must be controlled to avoid soil erosion.					
Water quality	Avoid stockpiling of earth fill especially during the monsoon season unless covered by tarpaulins or plastic sheets					
	Prioritize re-use of excess spoils and materials in the construction works. If spoils will be disposed, consult with GMC/PIU on designated disposal areas					
	Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies					
	Proper discharge of waste water as generated during development of tube well					
	Place storage areas for fuels and lubricants away from any drainage leading to water bodies					
	Dispose any wastes generated by construction activities in designated sites					
	Conduct surface quality inspection according to the Environmental Management Plan (EMP)					
Conservation of natural environment	As the work front progresses the Contractor is to check that vegetation clearing has the prior permission of the					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	DSC/PIU Engineer and Environmental Specialist of PMC.					
	Minimize removal of vegetation and disallow cutting of trees (particularly at forest area of Singrasthan) as far as possible through design modification					
	Require to plant three (3) native trees for every one (1) that is removed					
	Prohibit employees from poaching wildlife, bird hunting, and cutting of trees for firewood					
	Non removal of trees of religious importance					
Materials management	Stockpiles shall not be situated such that they obstruct natural water pathways.					
	Stockpiles shall not exceed 2m in height unless otherwise permitted by the concerned Engineer.					
	All concrete mixing must take place on a designated, impermeable surface.					
	No vehicles transporting concrete to the site may be washed on site.					
Landscape and Aesthetics including Waste management	Refuse must be placed in the designated skips / bins which must be regularly emptied.					
	Prepare and implement Waste Management Plan					
	In addition to the waste facilities within the construction camp, provision must be made for waste receptacles to be placed at intervals along the work front.					
	Littering on site is forbidden and the site shall be cleared of litter at the end of each working day.					
	Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas for improvement of aesthetic environment. Recycling is to be encouraged by providing separate receptacles for different types of wastes (including demolition waste) and making sure that staff is aware of their uses.					
	Disposal arrangement of muck as generated from tube well construction					
	All waste must be removed from the site and transported to a disposal site or as directed by the					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	Engineer.					
	Waste from toilets shall be disposed of regularly and in a responsible manner.					
	Hazardous waste disposal must be carried out by the Contractor in a responsible manner					
	Storage areas will be properly fenced off					
	Top soil needs to be utilised by farmers for nutrient value					
	Coordinate with DSC-PIU for beneficial uses of excess excavated soils or immediately dispose to designated areas					
	Recover used oil and lubricants and reuse or remove from the sites					
	Request DSC/PIU to report in writing that the necessary environmental restoration work has been adequately performed before acceptance of work					
Existing Infrastructure and facility	Utility shifting (if required) will be undertaken prior to commencing construction works. Keep construction related disturbances to a minimum. Consult with affected service providers regarding impacts on access to infrastructure and services and alternatives. Consult with affected communities or businesses prior to foreseeable disruptions, for example notifying residents of a temporary interruption of water supply. Provide backup or alternative services during construction-related disruptions, Provide access points to infrastructure and services. Monitor complaints by the public					
Occupational Health and Safety	World bank Environmental, Health, and Safety (EHS) Guidelines - EHS Guidelines for water & sanitation will be followed. Specifically,  (i) Develop and implement site-specific Health and Safety (H and S) Plan which will include measures such as: (a) excluding public from the site; (b) ensuring					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	<p>all workers are provided with and use Personal Protective Equipment like helmet, gumboot, safety belt, gloves, nose musk and ear plugs; (c) H and S Training for all site personnel; (d) documented procedures to be followed for all site activities; and (e) documentation of work-related accidents;</p> <p>(ii) Ensure that qualified first-aid can be provided at all times. Equipped first-aid stations shall be easily accessible throughout the site;</p> <p>(iii) Provide medical insurance coverage for workers;</p> <p>(iv) Secure all installations from unauthorized intrusion and accident risks;</p> <p>(v) Provide supplies of potable drinking water;</p> <p>(vi) Provide clean eating areas where workers are not exposed to hazardous or noxious substances;</p> <p>(vii) Provide H and S orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;</p> <p>(viii) Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;</p> <p>(ix) Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;</p> <p>(x) Ensure moving equipment is outfitted with audible back-up alarms;</p> <p>(xi) Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance</p>					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	<p>with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate; and</p> <p>(xii) Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.</p>					
Community Health & Safety	Plan routes to avoid times of peak-pedestrian activities.					
	Liaise with DSC- PIU in identifying risk areas on route cards/maps					
	Maintain regularly the vehicles and use of manufacturer-approved parts to minimize potentially serious accidents caused by equipment malfunction or premature failure.					
	Provide road signs and flag persons to warn of dangerous conditions, in case of location near the road.					
	Provide protective fencing around open trenches, and cover any open trench with metal planks during non-construction hours					
Traffic & accessibility impact	<p>Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites;</p> <p>Schedule transport and hauling activities during non-peak hours;</p> <p>Locate entry and exit points in areas where there is low potential for traffic congestion;</p> <p>Keep the site free from all unnecessary obstructions;</p> <p>Drive vehicles in a considerate manner;</p> <p>Coordinate with Govt. Traffic Department for temporary road diversions and with for provision of traffic aids if transportation activities cannot be avoided during peak</p>					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	hours; and Notify affected sensitive receptors by providing sign boards informing nature and duration of construction works and contact numbers for concerns/complaints					
Social impacts	The conduct of the construction staff when dealing with the public or other stakeholders shall be in a manner that is polite and courteous at all times.					
	Disruption of access for local residents, commercial establishments, institutions, etc. must be minimized and must have the Engineer's permissions.					
	The work plan for the construction and laying of pipelines will be devised in such a way to ensure that the construction period is minimized. Compensation will be provided to impacted person					
	Provide walkways and metal sheets where required to maintain access for people and vehicles.					
	Increase workforce in front of critical areas such as educational institutions, places of worship, business establishment and health care establishments to shorten the duration of impacts.					
	Consult businesses and institutions regarding operating hours and factoring this in work schedules.					
	The Contractor is to inform neighbors in writing of disruptive activities at least 24 hours beforehand.					
	Lighting on the construction site shall be pointed downwards and away from oncoming traffic and nearby houses.					
	The site must be kept clean to minimize the visual impact of the site.					
	Machinery and vehicles are to be kept in good working order for the duration of the project to minimize noise					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	nuisance to neighbors.					
	<p>Notice of particularly noisy activities must be given to residents / businesses adjacent to the construction site. Examples of these include:</p> <ul style="list-style-type: none"> <li>• noise generated by jackhammers, diesel generator sets, excavators, etc.</li> <li>• drilling</li> <li>• dewatering pumps</li> </ul>					
	Noisy activities must be restricted to the times given in the Project Specification or General Conditions of Contract.					
	A complaints register (refer to the Grievance Redressal Mechanism) shall be housed at the site office.					
	Interested and affected parties' need to be made aware of the existence of the complaints book and the methods of communication available to them.					
	Contractor shall immediately take the necessary remedial action on any complaint/grievance received by him					
Cultural environment	All the staff and labourers of the Contractor be informed about the possible items of historical or archaeological value					
	If something of this nature be uncovered, ASI or State Department of Archaeology shall be contacted and work shall be stopped immediately.					
Environment Safeguard/safety Officer	Contractor shall appoint one Environment Safeguard/ Safety Officer who shall be responsible for assisting contractor in implementation of EMP, community liaison, consultations with interested/affected parties, reporting and grievance redressal on day-to-day basis.					



**C. Defects Liability Stage**

<b>Field</b>	<b>Mitigation Measures</b>	<b>Parameters Monitored (As a minimum those identified in the IEE should be monitored)</b>	<b>Method of Monitoring</b>	<b>Location of Monitoring</b>	<b>Date of Monitoring Conducted</b>	<b>Name and Designation of Person Who Conducted the Monitoring</b>
Construction camp	All structures comprising the construction camp are to be removed from site or handed over to the property owner/ community as per mutual agreement					
	The area that previously housed the construction camp is to be cleaned up.					
	The Contractor must arrange the cancellation of all temporary services.					
Vegetation	All areas that have been disturbed by construction activities must be cleared of alien vegetation.					
	All vegetation that has been cleared during construction is to be removed from site					
	The Contractor is to water and maintain all planted vegetation until the end of the defects liability period					
Land rehabilitation	All surfaces hardened due to construction activities are to be ripped and imported materials thereon removed.					
	All rubble is to be removed from the site to an approved disposal site.					
	The site is to be cleared of all litter.					
	Surfaces are to be checked for waste products from activities such as concreting or asphaltting and cleared in a manner approved by the Engineer.					
Materials and infrastructure	Fences, barriers and demarcations associated with the construction phase are to be removed from the site					
	All residual stockpiles must be removed to spoil or spread on site					
	All leftover building materials must be returned to the depot or removed from the site.					
	The Contractor must repair any damage that the construction work has caused to neighboring properties.					
General	A meeting is to be held on site between the Engineer, ES-PMC and the Contractor to approve all remediation activities and to ensure that the site has been restored to a condition approved by the Engineer.					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	Temporary roads must be closed and access across these blocked.					
	Refill and re-compact trenches soil and backfilled sand will be removed to expose the leaking junction or pipe					
	Cover or wet excavated material to prevent dusts					
	All areas where temporary services were installed are to be rehabilitated to the satisfaction of the Engineer					
Aesthetics, Landscape character and Sense of Place	The new Tube well proposed to be constructed under this subproject will be similar in construction and design to existing Tube well in and around Monitor housekeeping, littering and illegal dumping.					
Hazards chemical and waste management	Store of common salt, dry, and dark conditions for no more than one month					
	Use equipment constructed of corrosion-resistant materials					
	Minimize the amount of disinfection materials for using in chlorinator					
	Material safety data sheet to be maintained at chlorine/common salt storage area					
	Regular laboratory testing for dosing and residual chlorine					
	Develop and implement a prevention program that includes identification of potential hazards, written operating procedures, training, maintenance, and accident investigation procedures					
	Store of common salt, dry, and dark conditions for no more than one month					
Water quality assessment and maintained – Health & safety	<ul style="list-style-type: none"> <li>• Undertake regular monitoring and maintenance of water supply infrastructure.</li> <li>• Quality of drinking water will be checked regularly at tube well locations and water storage sites</li> <li>• Sewage water will be treated in STP (which is under design stage) before discharge.</li> </ul>					
Sustainable water source – Both quantity and quality aspects	<ul style="list-style-type: none"> <li>• Monitoring of water abstraction from Phalgu aquifer <ul style="list-style-type: none"> <li>○ Monitoring of water level in the aquifer: install a number of observation wells: inside the aquifer, some 40m from the river edge. PMC to propose suitable locations. Construction to be included in GWSP2 contract.</li> </ul> </li> </ul>					

Field	Mitigation Measures	Parameters Monitored (As a minimum those identified in the IEE should be monitored)	Method of Monitoring	Location of Monitoring	Date of Monitoring Conducted	Name and Designation of Person Who Conducted the Monitoring
	<ul style="list-style-type: none"> <li>○ Monitoring water abstraction by production tube wells.</li> <li>○ Regular analysis of correlations between above 2 points</li> <li>○ Monitoring to be carried out by GWSP2 contractor (as part of his Operation task)</li> <li>● Monitoring of water quality of the source / Phalgu aquifer:</li> </ul>					
Social and Cultural Resources	<ul style="list-style-type: none"> <li>● Consult the city authorities to identify any buildings at risk from vibration damage and avoiding any use of pneumatic drills or heavy vehicles in the vicinity;</li> <li>● Complete work in these areas quickly</li> <li>● Consult municipal authorities, custodians of important buildings, cultural and tourism authorities and local communities in advance of the work to identify and address key issues, and avoid working at sensitive times, such as religious and cultural festivals</li> </ul>					

**Overall Compliance with CEMP/ EMP**

No.	Sub-Project Name	EMP/ CEMP Part of Contract Documents (Y/N)	CEMP/ EMP Being Implemented (Y/N)	Status of Implementation (Excellent/ Satisfactory/ Partially Satisfactory/ Below Satisfactory)	Action Proposed and Additional Measures Required

**III. Training Orientation program details – Date, Venue, Participants, Subjects**

**IV. APPROACH AND METHODOLOGY FOR ENVIRONMENTAL MONITORING OF THE PROJECT**

Brief description on the approach and methodology used for environmental monitoring of each subproject

- Monitoring of environmental IMPACTS on PROJECT SURROUNDINGS (ambient air, water quality and noise levels)
- Brief discussion on the basis for monitoring
- Indicate type and location of environmental parameters to be monitored
- Indicate the method of monitoring and equipment to be used
- Provide monitoring results and an analysis of results in relation to baseline data and statutory requirements

As a minimum the results should be presented as per the tables below.

**Air Quality Results**

Site No.	Date of Testing	Site Location	Parameters (Monitoring Results)		
			PM10 µg/m <sup>3</sup>	SO <sub>2</sub> µg/m <sup>3</sup>	NO <sub>2</sub> µg/m <sup>3</sup>

**Water Quality Results**

Site No.	Date of Sampling	Site Location	Parameters (Government Standards)					
			pH	Conductivity µS/cm	BOD mg/L	TSS mg/L	Turbidity in NTU	TP mg/L

**Noise Quality Results**

Site No.	Date of Testing	Site Location	LAeq (dBA) (Government Standard)	
			Day Time	Night Time

**V. SUMMARY OF KEY ISSUES AND REMEDIAL ACTIONS**

Summary of follow up time-bound actions to be taken within a set timeframe

**VI. APPENDIXES**

Photos

Summary of consultations

Copies of environmental clearances and permits

Sample of environmental site inspection report

Others

# Land Acquisition and Resettlement Due Diligence Report

---

Document stage: Draft for consultation  
Project number:  
November 2015

## IND: Bihar Urban Development Investment Program– Gaya Water Supply Subproject II

Prepared by the Bihar Urban Infrastructure Development Corporation Ltd. (BUIDCO), Urban Development Department, Government of Bihar for the Asian Development Bank

This due diligence report is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

### CURRENCY EQUIVALENTS

(as of xx xxx 2015)

Currency unit	–	Indian rupees (Re/Rs)
Re1.00	=	\$ xx.xx
\$1.00	=	Rs x.xxx

### ABBREVIATIONS

ADB	–	Asian Development Bank
AH	–	affected household
AP	–	affected person
APD	–	Additional Project Director
BPL	–	below poverty line
BUIDCO	–	Bihar Urban Infrastructure Development Corporation
CPR	–	common property resource
DP	–	displaced person
DSC	–	design supervision consultants
EA	–	Executing agency
FGD	–	focus group discussion
FHH	–	female headed household
GMC	–	Gaya Municipal Corporation
GoI	–	Government of India
GoB	–	Government of Bihar
GRC	–	grievance redressal committee
GLSR	–	ground level service reservoir
HH	–	household
INR	–	Indian rupee
IP	–	indigenous peoples
IR	–	Involuntary resettlement
LA	–	land acquisition
LARR	–	Land Acquisition, Rehabilitation and Resettlement (Act)
MoUD	–	Ministry of Urban Development
NGO	–	non-government organization
NRRP	–	National Resettlement and Rehabilitation Policy
OHT	–	overhead tank
PD	–	Project Director
PHED	–	Public Health Engineering Department
PMC	–	project management consultant
RP	–	resettlement plan
SC	–	scheduled caste
ST	–	scheduled tribe
TOR	–	terms of reference
WHH	–	woman headed household

### WEIGHTS AND MEASURES

cum	–	cubic meter
Km	–	Kilometer
m <sup>2</sup>	–	square meter
Mm	–	Millimeter
m <sup>3</sup>	–	micrograms per cubic meter

### **GLOSSARY OF LOCAL TERMS**

<i>bigha</i>	– size of land parcel; 1 bigha = 20 katha (0.678 ha)
<i>crore</i>	– 10 million (= 100 lakh)
<i>katha</i>	– size of land parcel; 1 katha = 20 Dhur(0.0339 ha)
<i>kuccha</i>	– temporary structure e.ga rural hut made of wood, bamboo or stone with mud mortar and a thatched roof
<i>lakh, lac</i>	– 100,000
<i>pakka</i>	– structure (house/building) with permanent roofing made of RCC/RBC
<i>semi-pakka</i>	– house or building made of stone with mud mortar and clay, timber, slate or corrugated iron roofing

## **CONTENTS**

	Page
<b>I. INTRODUCTION</b>	5
A. Background	5
B. Scope of this report	5
<b>II. SUBPROJECT DESCRIPTION</b>	7
A. Proposed components	7
<b>III. FIELD WORK AND PUBLIC CONSULTATION</b>	7
A. Outline of field work	7
B. Public Consultation	7
<b>IV. LAND AVAILABILITY AND RESETTLEMENT IMPACTS</b>	8
A. Findings	8
<b>I. CONCLUSIONS</b>	19
A. Summary and Conclusions	19
B. Next Steps	19



## I. INTRODUCTION

### A. Background

1. The Bihar Urban Development Investment Program (BUDIP) envisages improved urban environment and living conditions in targeted urban areas in the state of Bihar. It will: (i) improve and expand urban infrastructure and services in urban areas (including slum areas); and (ii) strengthen urban institutional, management, and the financing capacity of institutions, including those of urban local bodies (ULBs). Urban infrastructure and services improvement covering rehabilitation, improvement and expansion is proposed in the following sectors (i) water supply, and (ii) sewerage and sanitation. ADB has agreed to co-finance implementation of certain components of the state's road map in the towns of Gaya and Bhagalpur. BUDIP is funded by ADB under its multi-tranche financing facility (MFF). The expected impact of BUDIP is increased economic growth potential, reduced poverty, and reduced imbalances between Bihar - one of the poorer and less developed states in India, and the rest of the country. The expected outcomes of the Investment Program will be an improved urban environment and living conditions for the residents of the BUDIP cities by 2020. Based on considerations of economic justification, absorptive capacity of the implementing agencies and sustainability, sub-projects have been identified in each city in the priority infrastructure sectors.

2. An urban water supply subproject for Gaya is proposed under tranche 2 of the ADB loan, of which major components comprising refurbishment/rehabilitation of existing facilities as well as new facilities such as overhead tanks, ground level service reservoirs, rising mains, tubewells, pump houses, distribution mains, distribution network etc. are proposed under Gaya Water Supply Project I works packages. Remaining key components such as new source development / construction of additional tubewells, related pumping system and transmission system to all existing and new reservoirs to meet the projected water demand, a clear water reservoir (CWR), with associated chlorine room, chlorine contact tank, compound wall and service road, a ground level service reservoir, an electrical substation at CWR location, transformers and control rooms at 7 tubewell locations, electro-chlorinators at 5 locations etc., which were deferred / not included in GWSP I are proposed under Gaya Water Supply Project II.

### B. Scope of this report

3. This Due Diligence Report (DDR) is prepared for identified components of the Gaya Water Supply Project (GWSP) II, proposed under tranche 2 of the MFF for BUDIP. The DDR is prepared on the basis of the Detailed Project Report (DPR) prepared for GWSP II. The Gaya Water Supply Project (comprising works packages proposed under GWSP I and II) is classified as "Category B" for Involuntary Resettlement (IR) impact as per ADB's Safeguard Policy Statement (SPS), 2009. Subproject components under GWSP II alone are not assessed to involve any land acquisition or physical / economic displacement, hence no resettlement plan is required. The DDR will be updated and reconfirmed for final IR impacts after confirmation of all sites (No Objection Certificates received from concerned departments, as applicable) and alignments (based on confirmation of location of existing utilities below ground) and completion of detailed measurement surveys, if need for the same is ascertained, prior to implementation.<sup>1</sup> The final DDR will be reviewed and disclosed

---

<sup>1</sup> Detailed measurement survey will be jointly conducted by safeguards personnel of project implementation unit, consultants and contractors prior to implementation at each site/stretch of alignment. RP for different sites/stretches will be prepared and submitted to ADB for approval; prior payment of compensation to

---

on IA and ADB websites. No civil works contracts package should be awarded and started before updation and acceptance of the DDR by ADB. The IA is responsible to hand over the project land/site to the contractor free of encumbrance.

4. A due diligence process was conducted to examine land acquisition and resettlement issues in detail, in line with ADB SPS 2009. This report describes the findings and provides copies of available land-related documents, public consultations and photographs. This land acquisition and resettlement due diligence report needs to be read along with the Resettlement Framework prepared for BUDIP.

5. Upon project implementation, the Environmental and Social Management Coordinator (ESMC) at PMU will be required to undertake a review of this due diligence, prepare a confirmation letter or report documenting any modifications for the subproject and submit to ADB; and receive a 'no objection' confirmation from ADB prior to start of construction in the subproject.

---

permanent and/or temporarily impacted persons is mandatory before start of civil work at each site/alignment stretch. DSC and contractor will be responsible for conduct of DMS and DSC will update RPs prior to implementation.

## **II. SUBPROJECT DESCRIPTION**

### **A. Proposed components**

6. Subproject components (civil works) proposed for GWSP II under BUDIP include construction of 24 tubewells with control rooms and transformers spread across seven locations in the Phalgu river bed, construction of a clear water reservoir of 4 ML capacity, with pump house, chlorine room, chlorine contact tank, compound wall and service road at ITI/Government Polytechnic Campus, a ground level service reservoir at Shringsthan of 3.7 ML capacity, rising mains of 17051 m length, electro-chlorinators at 5 locations, a pump house at Budva Mahadev, a Central Customer Service Centre cum Operating Office at Dandibagh and 5 customer service centres spread across the service area.

## **III. FIELD WORK AND PUBLIC CONSULTATION**

### **A. Outline of field work**

7. In August 2015, field inspection of proposed subproject facility locations and pipeline alignments that had been identified was undertaken. These included field visit to the identified sites and alignments; and stakeholder consultations. All the land requirement for GWSP II is fulfilled by government land.

### **B. Public Consultation**

8. Consultations were undertaken with key stakeholders in line with ADB's requirements pertaining to environment and social considerations. Tools used for consultation were meetings and focus group discussions (FGD). Key concerns of the people related to the project i.e. people's participation in project implementation, types and likely duration of impacts and proposed mitigation measures were discussed. A total of 66 persons were consulted specifically for GWSP II, of which 26 persons (40%) were women.

9. Field visits were made to all proposed tubewell and related facility (pumping machinery, pump room, electro-chlorinators, transformers and sub-stations etc.) sites, all transmission pipeline alignments, the proposed clear water reservoir (CWR) and related facilities site including service road alignment leading to CWR, the proposed site for GLSR at Shringasthan, and the proposed central customer service centre cum operating office site at Dandibagh. It was found that all the sites are proposed on government land and the pipelines traverse through government land / road RoW. The field visits/reconnaissance surveys helped establish that there was no need for further surveys / inventories of loss of assets to be prepared, until the proposed government sites are confirmed and NOCs from Forest Department land and ITI/Government Polytechnic Campus land are received and below-ground utility details are available for proposed pipe alignments along roads.<sup>2</sup> The following table 2 provides a summary of consultations and discussions held with stakeholders.

---

<sup>2</sup> On confirmation of the sites and alignments, detailed measurement survey may be undertaken prior to implementation, if need for the same is ascertained, prior to implementation.

**Table 2: Summary of consultations**

S.No.	Date	Location	No. of Participants	Discussions/ Issues/ Concerns
1	18.8.2015	Waris Nagar	31	The participants were given information on Gaya Water Supply Project- 24X 7
				Provided information on proposed work to be undertaken by the project and likely impact days
				The community expressed need for public tap for good quality drinking water
				The community expressed need for temporary, project-related jobs as labor.
2	19.8.2015	Near Falgu River opposite of Joda Maszid	23	The participants were given information on Gaya Water Supply Project- 24X 7
				Provided information on proposed work to be undertaken by the project and likely impact days
				The community expressed need for public tap for good quality drinking water
				The community expressed need for temporary, project-related jobs as labor.
3	19.8.2015	Industrial Training Institute (ITI) - components TWs and Clear Water Reservoirs	4	The participants were given information on Gaya Water Supply Project- 24X 7
				Provided information on proposed work to be undertaken by the project and likely impact days
				The Principal and staff assured full cooperation
				The college authorities explored the possibility of making the existing OHT in the campus (for water supply within the campus) functional. Necessary follow-up with PHED (responsible department for maintenance), would be undertaken by project staff to address the issue.
4	20.8.2015	RoW of Rising Main for Delha OHT	8	The participants were given information on Gaya Water Supply Project- 24X 7
				Provided information on proposed work to be undertaken by the project and likely impact days
				The community expressed need for temporary, project-related jobs as labor.
				The community (project beneficiaries) expressed the need for Skill Development Program information and linkages etc to improve family income

#### IV. LAND AVAILABILITY AND RESETTLEMENT IMPACTS

##### A. Findings

10. The subproject comprises construction of 24 tubewells at seven locations in the Falgu river bed (government land), related facilities adjacent to the tubewell locations on the banks (government land), construction of a clear water reservoir with 4 ML capacity, related facilities and service road, within a government polytechnic campus, a ground level service reservoir at Shringsthan of 3.7 ML capacity, and construction of a central customer service centre cum operating office at Dandibagh water works campus (GMC land). Five customer service centres are proposed in rented premises across the city, for which no civil works will be involved, hence no IR impacts are anticipated. Proposed rising mains (17051 m) pipeline alignments are along government road RoWs or on government land: For laying

of rising main from Warish Nagar tubewell, impacts to businesses at Kharkhura Road are proposed to be avoided by laying the main pipeline under the black-topped portion of the road and undertaking pipe laying work at night. For all other roads where pipe alignments are proposed, only temporary disruption to road users/traffic, pedestrians and community members are anticipated, which can easily be mitigated during construction by the contractor. No private land acquisition is anticipated for proposed subproject components under GWSP II. All the above components are proposed on government land. Hence, no IR impacts are anticipated for the identified components.

11. Table 3 provides a summary of land availability, ownership and anticipated IR impacts of proposed components of GWSP II. The Google map(s) showing the location of different components are presented in Figures 1-5 while Schematic Layout of proposed components is shown in Figure 6.

Figure 2: Google Earth Maps showing major components of the proposed Gaya Water Supply Project II






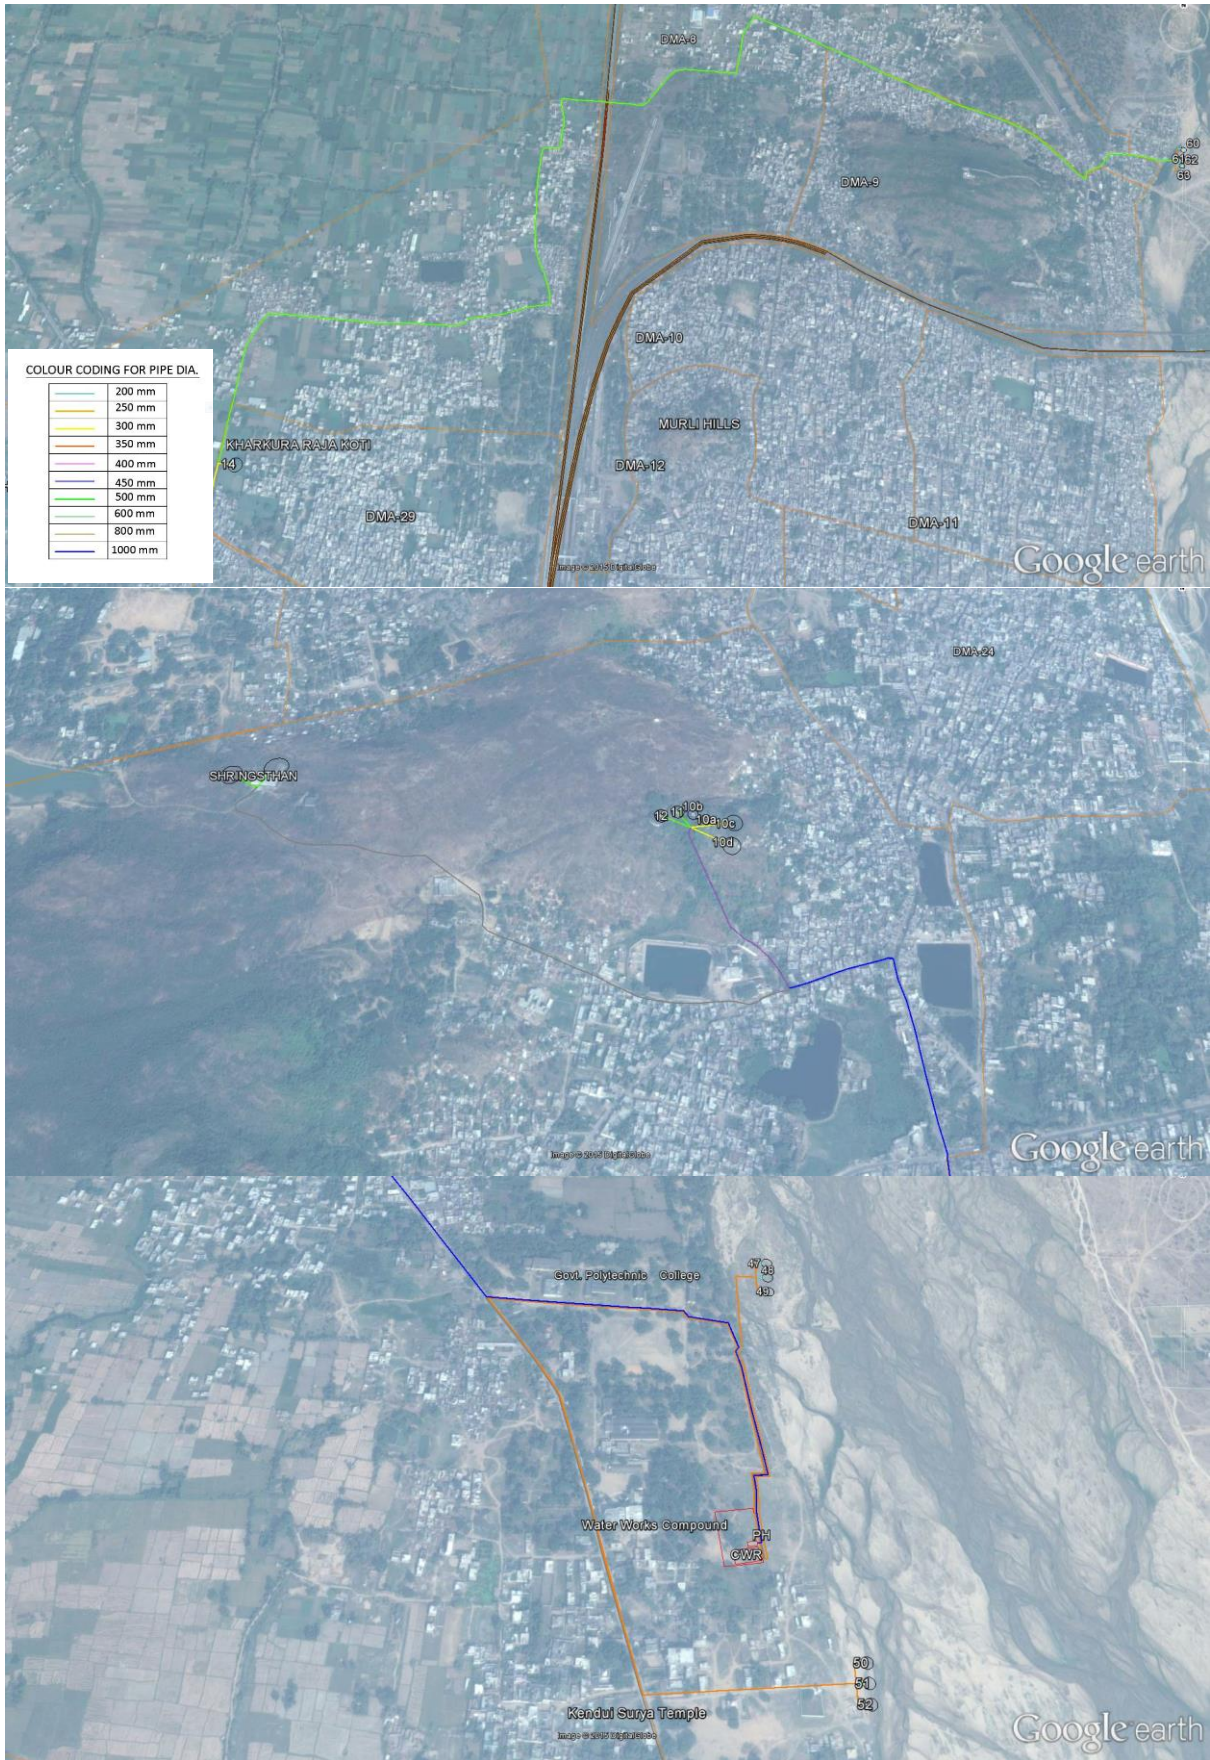






Figure 6: Schematic Layout

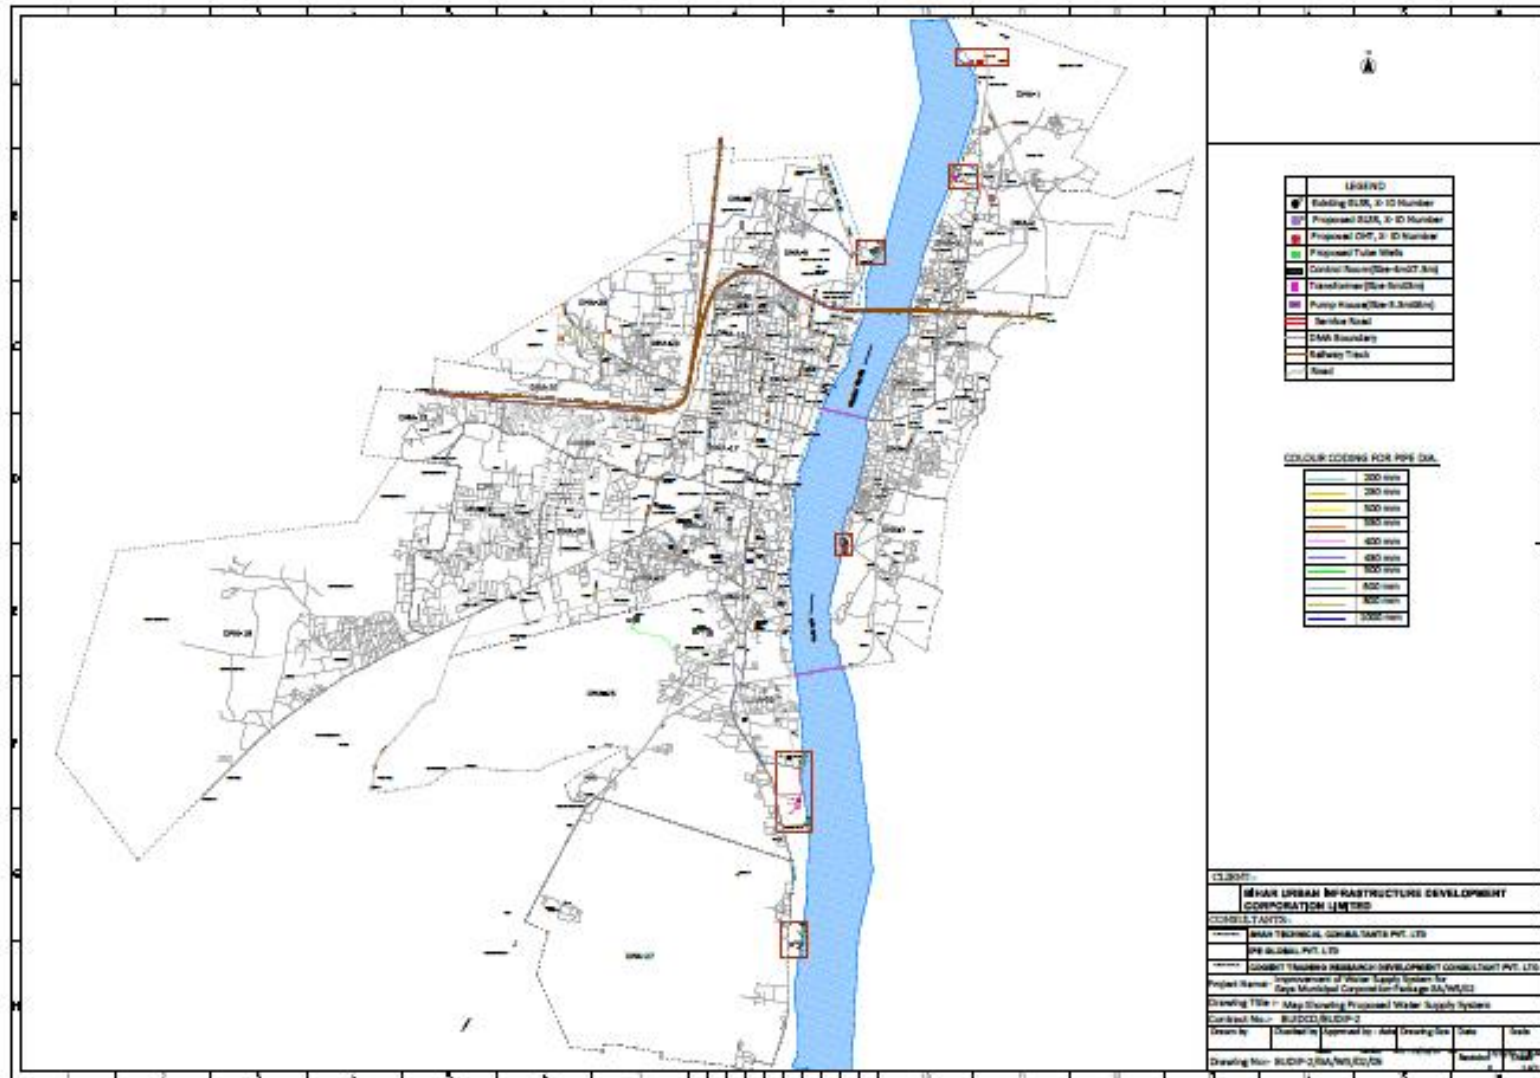

**Table 3: Proposed sub-project components of GWSP II : land availability, ownership and involuntary resettlement impact status**

S. No.	Components	Capacity	Unit (No.)	Length (mtr)	Area	Land Ownership	IR Impact
<b>Water Supply</b>							
<b>A</b>	<b>CWR &amp; GLSR</b>						
A1	<b>Tube Well: ITI CAMPUS</b>	4 ML	3 TW		10m x 10m per tubewell	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	3 tubewells including pump house proposed on Phalgu riverbed (which belongs to government). Will be accessible through the Polytechnic (where clear water reservoir proposed). Gap of 30 m between each tubewell proposed. No IR impact anticipated.
A1.1	<b>Rising main</b> from ITI tubewells to CWR			724.00			The proposed rising main will go along the river bed to the proposed CWR on ITI/government land. No IR impact anticipated.
A1.2	<b>Control Room</b> AT ITI Campus		1		7.5 M X 4 M	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	To be constructed on vacant government land near proposed CWR on ITI campus. No IR impacts are anticipated.
A1.3	<b>Transformer/E Sub Station</b> at ITI Campus	125 KVA	1+1 (one as stand by) 1		4.10 M X 3.50 M	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	To be installed on vacant government land. No IR impacts are anticipated.
<b>A2</b>	<b>Tube Well: Kendui (Surya Temple)</b>						
A2.1	<b>Rising mains</b> from Kendui tubewells to CWR			2002.28			Rising mains along the river bed (which belongs to government) from Kendui tubewells upto CWR proposed. No IR impacts anticipated.
A2.2	<b>Control Room</b> at Kendui		1		7.5 M X 4 M	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	To be constructed on vacant government land. No IR impacts are anticipated
A2.3	<b>Transformer/E Sub Station</b> at Kendui	250 KVA	1+1 (one as stand by)		4.10 M X 3.50 M	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	To be installed on vacant government land. No IR impacts are anticipated.

S. No.	Components	Capacity	Unit (No.)	Length (mtr)	Area	Land Ownership	IR Impact
A3	<b>Tube Well: Khriyama (Kendua)</b>		7 TW		10x10 m per tubewell	Anabad, GoB (Uninhabited land, Government of Bihar)	7 tubewells proposed on Phalgu river bed. No IR impacts anticipated.
A3.1	<b>Rising mains</b> from Khriyama tubewells to CWR			3510.78			Rising mains proposed along river bed upto CWR; after CWR, they will follow road RoW. No IR impacts anticipated.
A3.2	<b>Control Room</b> at Khriyama (Kendua)		1		7.5 M X 4 M	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	To be constructed on vacant government land. No IR impacts are anticipated.
A3.3	<b>Transformer / E Sub Station</b> at Khriyama (Kendua)	125 KVA	1+1 (one as stand by) 1		4.10 M X 3.50 M	Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	To be installed on vacant government land. No IR impacts are anticipated.
A4	<b>Clear water reservoir</b> at Polytechnic Campus	4 ML	1 CWR 1 PH		60 m x 90 m	Anabad Sarva Sadharan, GoB	CWR, pump house and compound wall proposed. Adequate vacant land is available at government polytechnic campus. No IR impacts anticipated. Consultations held with management of institution indicate willingness to provide land. NOC under process.
A4.1	<b>Chlorine Room and chlorine contact tank</b> at Polytechnic Campus	1690 m <sup>3</sup> / hr	1		5.0 M x3.0 M	Anabad Sarva Sadharan, GoB	To be constructed on vacant Govt. land. No IR impacts are anticipated.
A1.2	<b>Control Room</b> AT Polytechnic Campus		1		7.5 M X 4 M	Anabad, Bihar Sarkar	To be constructed on vacant government. land. No IR impacts are anticipated.
A1.3	<b>Transformer/E Sub Station</b> at Polytechnic Campus	1000 KVA	1+1 (one as stand by)		4.10 M X 3.50 M	Anabad Sarva Sadharan, GoB	To be installed on vacant government land. No IR impacts are anticipated.
A1.4	Service Road to clear water reservoir			530 m x 3 m width		Anabad Sarva Sadharan, GoB (Uninhabited land, Government of Bihar)	The road will be provided along the boundary wall of the ITI, within ITI Campus. There is an existing path which will be converted to a pucca road. Vacant government land; no IR impact anticipated.
A5	<b>Rising mains from CWR to Akshyawat Temple</b>			2284.45		Bihar Sarkar	Rising mains from CWR to Akshyawat temple will follow road ROW. No IR impacts anticipated.
A5.1	<b>Rising mains</b> from Akshyawat Temple to Brahmayoni Hills			537.84		Forest/ Bihar Sarkar	Pipe alignment will follow public road RoW upto Brahmayoni Hills. Along the hill slopes (Brahmyoni Hills), it will be laid on Forest

S. No.	Components	Capacity	Unit (No.)	Length (mtr)	Area	Land Ownership	IR Impact
							Department land, along/parallel to existing pipe alignments. Pipe laying proposed on vacant government land; no IR impacts anticipated.
A5.2	Rising mains from Akshyawat Temple to Singrasthan Hills			1178.61		Forest Department/ Government of Bihar	Rising mains alignments will follow road RoW and will be taken along (adjacent to) the existing pipelines (linked to the existing GLSR) at Singrasthan, on vacant Forest Department land. No IR impacts anticipated. NOC under process.
	GLSR at Shringsthan Hills	3.7 ML	1 GLSR		45 M X 45 M	Forest Department	Vacant land available. Forest Department land. NOC under process.
<b>B</b>	<b>OHTs</b>						
B1	<u>Tube Well: Warish Nagar (Iqbal Nagar) Delha</u>		4 TW		10 m x10 m per tubewell	Government of Bihar	4 tubewells proposed on Phalgu river bed. No IR impacts anticipated.
B1.1	Rising main from Warish Nagar tubewell transferred from GWSP1 to GWSP2			5572.44		Government of Bihar	Rising mains will be laid along Gaya Patna road; there is a railway crossing enroute, Tekari Parhaiya Road and then Delha thana. No IR impacts anticipated. Impacts to businesses at Kharkhura Road can be avoided by laying the main pipeline under the black-topped portion of the road and undertaking pipe laying work at night.
B1.2	Chlorine Room (Warish Nagar-Delha)	200 m3 / hr	1		5.0 M x 3.0M	Government of Bihar	To be constructed on vacant government land. No IR impacts are anticipated.
B1.3	Control Room (Warish Nagar-Delha)		1		7.5 M X 4 M	Government of Bihar	To be constructed on Vacant Govt. land. No IR impacts are anticipated.
B1.4	Transformer / E Sub Station (Warish Nagar-Delha)	200 KVA	1+1 (one as stand by) 1		4.10 M X 3.50M	Government of Bihar	To be installed on vacant government Land. No IR impacts are anticipated
<b>B2</b>	<b><u>Tube Well: Near Budhva Mahadev temple</u></b>		1 TW		10 m x 10 m for tubewell	Government of Bihar	1 tubewell proposed on Phalgu river bed. OHT site is located next to the river bed.
B2.1	Rising mains from tubewells near Budhva Mahadev temple to OHT			152.70		Government of Bihar	Pipe alignment will traverse government land. No IR impact anticipated.
B2.2	Chlorine Room Near Budhva Mahadev temple	100 m3 / hr	1		5.0 M x 3.0 M	Government of Bihar	To be constructed on vacant government land. No IR impacts are anticipated.
B 2.3	<b>Pump House</b>		1		6 m X 3.5 m X 4 m height		To be constructed on vacant government land. No IR impacts are anticipated.
<b>B3</b>	<b><u>Tube Well: North-West of Gauri Shankar temple</u></b>		4 TW		10 m x 10 m per tubewell	Government of Bihar	4 tubewells proposed on Phalgu river bed.

S. No.	Components	Capacity	Unit (No.)	Length (mtr)	Area	Land Ownership	IR Impact
	<b>(Joda Masjid)</b>						
B3.1	<b>Rising mains</b> from TWs NW of Gauri Shankar temple OHT (Joda Masjid)			935.90		Government of Bihar	Main pipelines will follow existing kutchra road RoW, cross Gaya Khijarsarai Road and reach Gangi-Jamuni pond. Entire alignment is clear and belongs to government.
B3.2	<b>Chlorine Room</b> Gauri Shankar temple (Joda Masjid)	400 m <sup>3</sup> / hr	1		5.0 M x 3.0M	Government of Bihar	To be constructed on vacant government land. No IR impacts are anticipated.
B3.3	<b>Control Room</b> Gauri Shankar temple (Joda Masjid)		1		7.5 M X 4 M	Government of Bihar	To be constructed on vacant government land. No IR impacts are anticipated.
B3.4	<b>Transformer / E Sub Station</b> Gauri Shankar temple (Joda Masjid)	250 KVA	1+1 (one as stand by)		4.10 M X 3.50 M	Government of Bihar	To be installed on vacant government land. No IR impacts are anticipated
<b>B4</b>	<b>Tube Well: Near Bhusunda</b>		2 TW		10 m x10 m per tubewell	Government of Bihar	2 tubewells proposed on Phalgu river bed at Bhusunda. (Site for OHT under GWSP1 is located next to river bed.)
B4.1	Rising mains from Bhusunda tubewells to OHT			151.68			Pipes will be laid on government land at Bhusunda.
B4.2	<b>Chlorine Room</b> Bhusunda	200 m <sup>3</sup> / hr	1		5.0 M x 3.0 M	Government of Bihar	To be constructed on vacant government land. No IR impacts are anticipated.
B4.3	<b>Control Room</b> Bhusunda		1		7.5 M X 4 M	Government of Bihar	To be constructed on vacant government land. No IR impacts are anticipated.
B4.4	<b>Transformer/E Sub Station</b> Near Bhusunda	100 KVA	1+1 (one as stand by) 1		4.10 M X 3.5 0M		To be installed on vacant government land. No IR impacts are anticipated
<b>C</b>	<b>Customer Service Centres</b>						
C1	Central Customer Service Centre cum operating office, Dandibagh (transferred from GWSP1 to 2)	1 No. for GWSP-II	1		14 m x 11 m	GMC	To be constructed on vacant land belonging to Gaya Municipal Corporation (existing water works compound at Dandibagh). No IR impacts anticipated.
C2	Customer Service Centres (1 per 15000 connections)	5 for GWSP-I	5		10 m x10 m	Premises for rent to be identified	5 nos. proposed to cover GWSP I service areas. Premises are proposed to be taken on rental basis. No civil works envisaged and no IR impacts anticipated.



## **I. CONCLUSIONS**

### **A. Summary and Conclusions**

12. No IR impacts are assessed at identified sites for sub-project components of GWSP II, as all sites belong to government and adequate vacant land is available. For laying of rising main from Warish Nagar tubewell, impacts to businesses at Kharkhura Road are proposed to be avoided by laying the main pipeline under the black-topped portion of the road and undertaking pipe laying work at night. For all other roads where pipe alignments are proposed, only temporary disruption to road users/traffic, pedestrians and community members are anticipated, which can easily be mitigated during construction by the contractor.

13. A budgetary provision is made for costs likely to be incurred for updating of this due diligence report, including surveys, consultations, grievance redress and contingency at 15% (INR 230,000).

### **B. Next Steps**

- DDR to be updated prior to project implementation, formally approved by ADB and disclosed as per standard practice.
- NOC for proposed CWR construction on ITI/government Polytechnic land to be obtained and appended to updated DDR.
- NOC for proposed GLSR at Shringsthan from Forest Department, GoB to be obtained and appended to updated DDR.
- Existing below-ground utility alignments to be confirmed for roads along which pipe alignments are proposed; DMS surveys to be conducted, if need for the same is ascertained on finalization of pipe alignment and sites. DDR to be updated with DMS survey results, if conducted.



**SITE PHOTOGRAPHS AND LAND RECORDS**

1. Kendui – Tube wells - 3 Nos.



Location Photograph – 1, Kendui Tube Well



Location Photograph – 2, Kendui Tube Well



Marked Location Map With Measurement



Location Photograph – 3, Kendui Tube Well

Handwritten Revenue Record (Khatiyani) Page 1 of 1. The document includes a header with the name 'श्रीमती सुमित्रा देवी' and a table with columns for 'क्र.सं.', 'कतिया', 'मालिक', 'आयतन', 'मूल्य', and 'नोट'. The table contains several rows of handwritten entries.

Revenue Record (Khatiyani) Page 1 of 1

Handwritten Revenue Record (Khatiyani) Page 1 of 2. This page continues the table from the previous page, containing more rows of handwritten entries in the same columns: 'क्र.सं.', 'कतिया', 'मालिक', 'आयतन', 'मूल्य', and 'नोट'.

Revenue Record (Khatiyani) Page 1 of 2




2. Khriyama – Tube Well - 7 Nos.



Location Photograph – 1, Khriyama Tube Well



Location Photograph – 2, Khriyama Tube Well

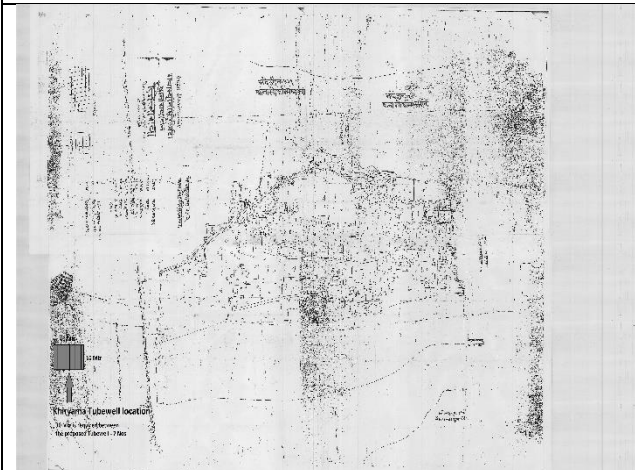

Marked Location Map With Measurement



Location Photograph – 3, Khriyama Tube Well

खसरी नं.	खसरी का नाम	खसरी का क्षेत्रफल (घ. म.)	खसरी का मालिक	अन्य जानकारी
2432	...	0.07	...	...
2433	...	0.08	...	...
2434	...	0.09	...	...
2435	...	0.10	...	...
2436	...	0.11	...	...
2437	...	0.12	...	...
2438	...	0.13	...	...
2439	...	0.14	...	...
2440	...	0.15	...	...
2441	...	0.16	...	...
2442	...	0.17	...	...
2443	...	0.18	...	...
2444	...	0.19	...	...
2445	...	0.20	...	...
2446	...	0.21	...	...
2447	...	0.22	...	...
2448	...	0.23	...	...
2449	...	0.24	...	...
2450	...	0.25	...	...

Revenue Record (Khatiyani) Page 1 of 1

खसरी नं.	खसरी का नाम	खसरी का क्षेत्रफल (घ. म.)	खसरी का मालिक	अन्य जानकारी
2451	...	0.26	...	...
2452	...	0.27	...	...
2453	...	0.28	...	...
2454	...	0.29	...	...
2455	...	0.30	...	...
2456	...	0.31	...	...
2457	...	0.32	...	...
2458	...	0.33	...	...
2459	...	0.34	...	...
2460	...	0.35	...	...
2461	...	0.36	...	...
2462	...	0.37	...	...
2463	...	0.38	...	...
2464	...	0.39	...	...
2465	...	0.40	...	...
2466	...	0.41	...	...
2467	...	0.42	...	...
2468	...	0.43	...	...
2469	...	0.44	...	...
2470	...	0.45	...	...

Revenue Record (Khatiyani) Page 1 of 2




3. ITI - Tube Wells – 3 Nos



Location Photograph – 1, ITI Tube Well



Location Photograph – 2, ITI Tube Well

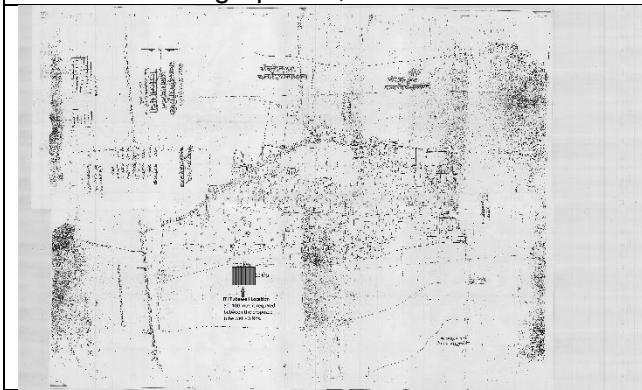

Marked Location Map With Measurement



Location Photograph – 3, ITI Tube Well

क्र.सं.	पट्टा नं.	अंश	वर्ग मी.	मालिक का नाम	कृषि/अन्य
1	323	...	...	...	...
2	...	...	...	...	...
3	...	...	...	...	...
4	...	...	...	...	...
5	...	...	...	...	...
6	...	...	...	...	...
7	...	...	...	...	...
8	...	...	...	...	...
9	...	...	...	...	...
10	...	...	...	...	...

Revenue Record (Khatiyani) Page 1 of 1

क्र.सं.	पट्टा नं.	अंश	वर्ग मी.	मालिक का नाम	कृषि/अन्य
1	...	...	...	...	...
2	...	...	...	...	...
3	...	...	...	...	...
4	...	...	...	...	...
5	...	...	...	...	...
6	...	...	...	...	...
7	...	...	...	...	...
8	...	...	...	...	...
9	...	...	...	...	...
10	...	...	...	...	...

Revenue Record (Khatiyani) Page 1 of 2




4. ITI - Clear Water Reservoir (CWR) – 1 Nos



Location Photograph – 1, ITI CWR



Location Photograph – 2, ITI CWR

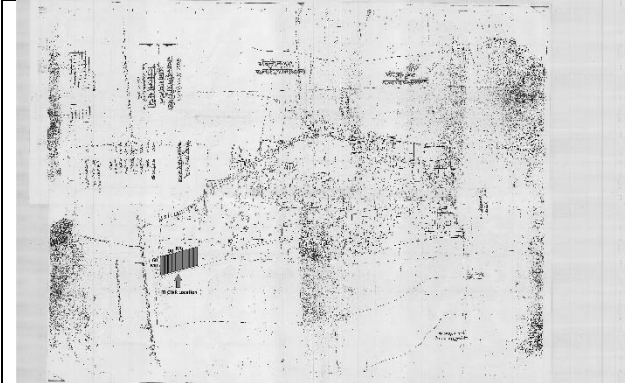

Marked Location Map With Measurement



Location Photograph – 3, ITI CWR

क्र.सं.	वर्ग	क्षेत्रफल (वर्ग मी.)	मालिक	संकेत	टिप्पणी
1	खेती	1-20 00/100	श्री. राम प्रसाद	323	
2	खेती	1-00 00/100	श्री. राम प्रसाद	323	
3	खेती	1-00 00/100	श्री. राम प्रसाद	323	
4	खेती	1-00 00/100	श्री. राम प्रसाद	323	
5	खेती	1-00 00/100	श्री. राम प्रसाद	323	
6	खेती	1-00 00/100	श्री. राम प्रसाद	323	
7	खेती	1-00 00/100	श्री. राम प्रसाद	323	
8	खेती	1-00 00/100	श्री. राम प्रसाद	323	
9	खेती	1-00 00/100	श्री. राम प्रसाद	323	
10	खेती	1-00 00/100	श्री. राम प्रसाद	323	

Revenue Record (Khatiyani) Page 1 of 1

क्र.सं.	वर्ग	क्षेत्रफल (वर्ग मी.)	मालिक	संकेत	टिप्पणी
1	खेती	1-20 00/100	श्री. राम प्रसाद	323	
2	खेती	1-00 00/100	श्री. राम प्रसाद	323	
3	खेती	1-00 00/100	श्री. राम प्रसाद	323	
4	खेती	1-00 00/100	श्री. राम प्रसाद	323	
5	खेती	1-00 00/100	श्री. राम प्रसाद	323	
6	खेती	1-00 00/100	श्री. राम प्रसाद	323	
7	खेती	1-00 00/100	श्री. राम प्रसाद	323	
8	खेती	1-00 00/100	श्री. राम प्रसाद	323	
9	खेती	1-00 00/100	श्री. राम प्रसाद	323	
10	खेती	1-00 00/100	श्री. राम प्रसाद	323	

Revenue Record (Khatiyani) Page 1 of 2




5. Shringasthan - GLSR - 1 Nos.



Location Photograph – GLSR




Rising Main

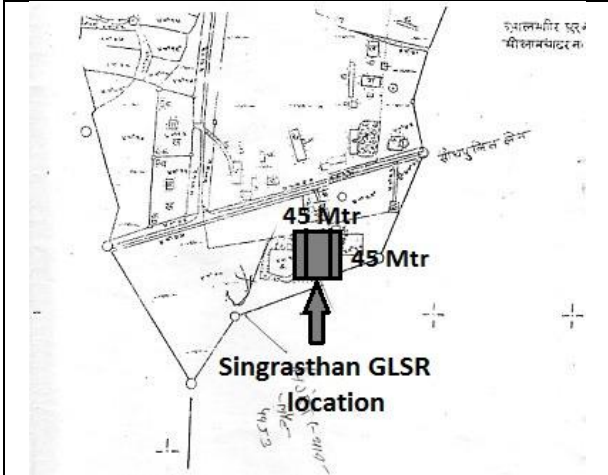

Location Map With Measurement



Distribution Main

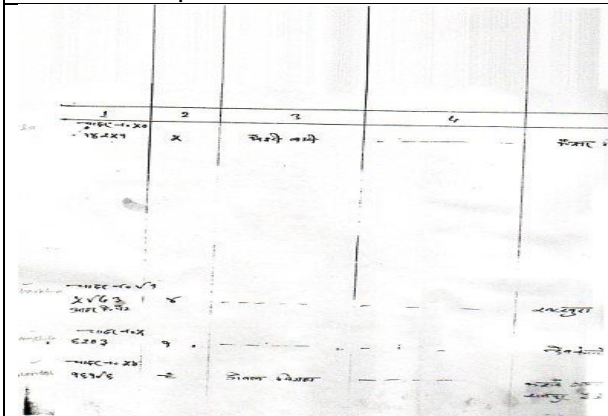


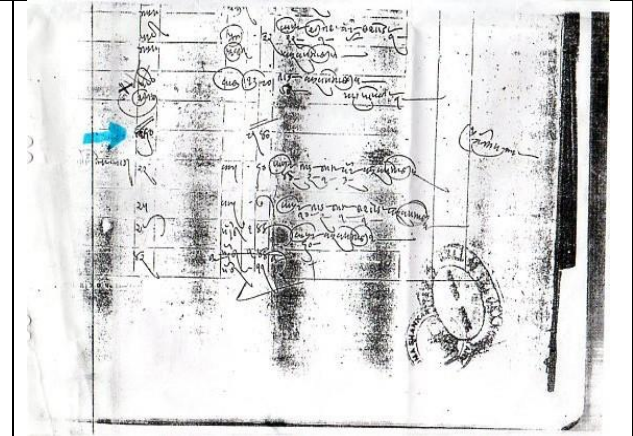


Revenue Record (Khatiyani)







Distribution Main

6. Bhusunda 2 Tube Wells.

	
<p>Location Photograph – 1, TW location</p>	<p>Location Photograph – 2, TW location</p>
	
<p>Location Map With Measurement</p>	<p>Revenue Record (Khatiyon)</p>



7. Budwa Mahadev - 1 Tube Wells.

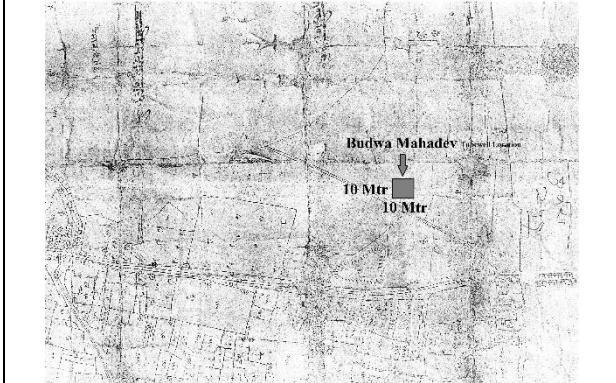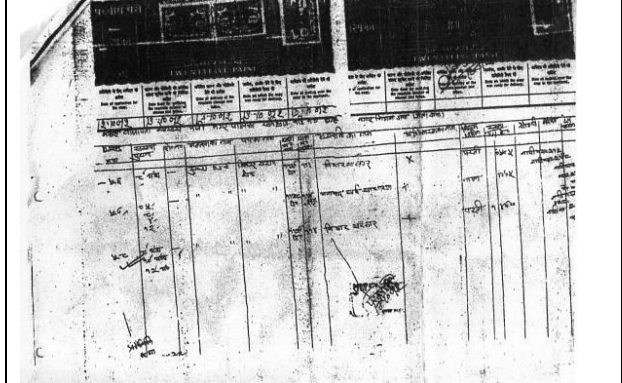	
<p>Location Photograph – 1, Budva Mahadev</p>	<p>Location Photograph – 2, Rising Main</p>
	
<p>Location Map With Measurement</p>	<p>Revenue Record (Khatiyon)</p>

8. Delha – Tube Well – 4 Nos.



Location Photograph - 1 Delha Tube Well




Location Photograph - 2 Rising Main to Delha




Location Photograph - 3 Rising Main to Delha



Location Photograph - 4 Rising Main to Delha

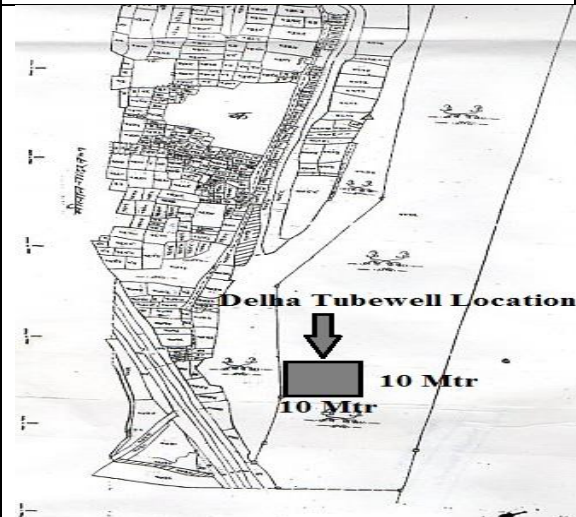

Location Map With Measurement

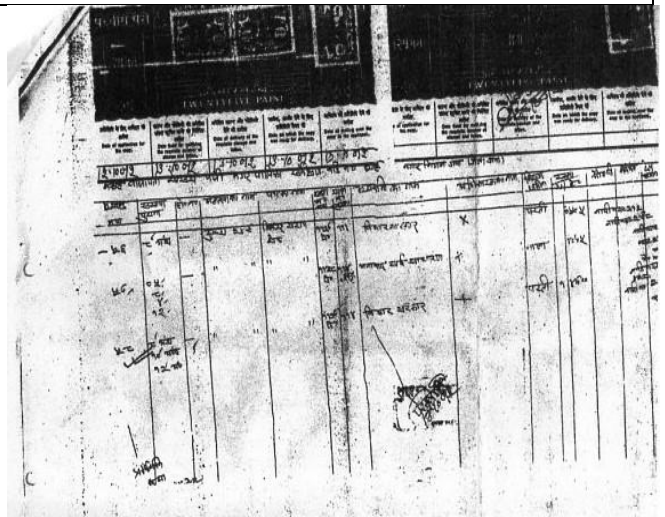

Revenue Record




9. Joda Masjid Tube Well 4 No.




Location Photograph – 3 Joda Masjid Tube Well



Rising Main route to Joda Masjid OHT

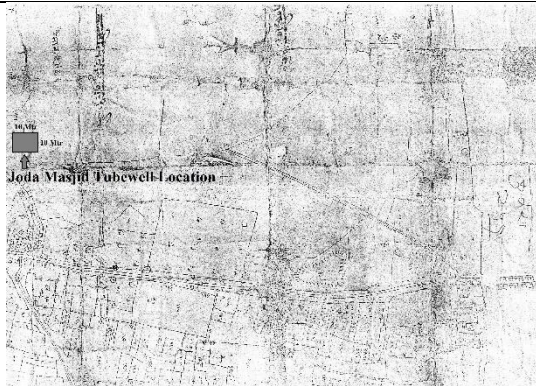

Location Map With Measurement

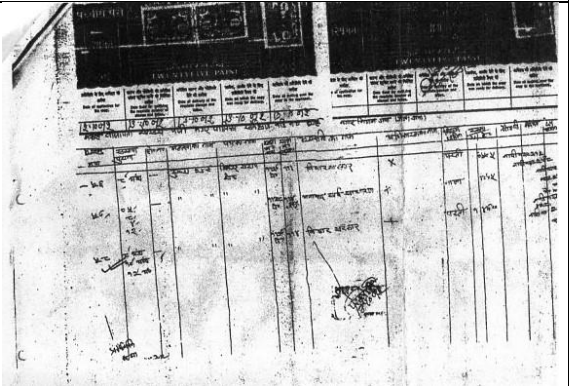

Revenue Record (Khatiyani)



**PHOTOGRAPHS OF RISING MAINS AND CWR SERVICE ROAD ALIGNMENTS**

	
Rising Main at Budwa Mahadeo	Rising Main at Budwa Mahadeo
	
Rising Main at Bhusunda	Rising Main at Bhusunda
	
Rising Main at Joda Masjid	Rising Main at Joda Masjid
	
Rising Main at Khriyama	Rising Main at Khriyama
	
Rising Main at Kendui	Rising Main at Kendui



Rising Main at ITI to CWR



Rising Main at ITI to CWR